



Small Signal Zener Diodes, Dual

Features

- These diodes are available in other case styles and configurations including: the dual diode common anode configuration with type designation AZ23, the single diode SOT-23 case with the type designation BZX84C-V, and the single diode SOD-123 case with the type designation BZT52C-V.
- Dual silicon planar zener diodes, common cathode
- The zener voltages are graded according to the international E 24 standard. Standard zener voltage tolerance is $\pm 5\%$. Replace "C" with "B" for 2% tolerance.
- The parameters are valid for both diodes in one case. ΔV_Z and Δr_{zj} of the two diodes in one case is $\leq 5\%$
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC



RoHS
COMPLIANT



18110

Mechanical Data

Case: SOT-23

Weight: approx. 8.8 mg

Packaging codes/options:

GS18/10 k per 13" reel, (8 mm tape), 10 k/box

GS08/3 k per 7" reel, (8 mm tape), 15 k/box

Absolute Maximum Ratings

$T_{amb} = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Power dissipation		P_{tot}	300 ¹⁾	mW

¹⁾ Device on fiberglass substrate, see layout on page 7.

Thermal Characteristics

$T_{amb} = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air		R_{thJA}	420 ¹⁾	K/W
Junction temperature		T_j	150	$^\circ\text{C}$
Storage temperature range		T_{stg}	- 65 to + 150	$^\circ\text{C}$

¹⁾ Device on fiberglass substrate, see layout on page 7.

Electrical Characteristics

Part number	Marking code	Zener voltage range ¹⁾		Dynamic resistance		Test current	Temperature coefficient of zener voltage		Reverse voltage
		V_Z at I_Z		r_{zj} at $I_Z = 5$ mA, $f = 1$ kHz,	r_{zj} at $I_Z = 1$ mA, $f = 1$ kHz,	I_Z	α_{VZ} at $I_Z = 5$ mA		V_R at $I_R = 100$ nA
		V		Ω		mA	$10^{-4}/^{\circ}\text{C}$		V
		min.	max.				min.	max.	
DZ23C2V7-V	V1	2.5	2.9	75 (< 83)	< 500	5	- 9	- 4	-
DZ23C3V0-V	V2	2.8	3.2	80 (< 95)	< 500	5	- 9	- 3	-
DZ23C3V3-V	V3	3.1	3.5	80 (< 95)	< 500	5	- 8	- 3	-
DZ23C3V6-V	V4	3.4	3.8	80 (< 95)	< 500	5	- 8	- 3	-
DZ23C3V9-V	V5	3.7	4.1	80 (< 95)	< 500	5	- 7	- 3	-
DZ23C4V3-V	V6	4	4.6	80 (< 95)	< 500	5	- 6	- 1	-
DZ23C4V7-V	V7	4.4	5	70 (< 78)	< 500	5	- 5	2	-
DZ23C5V1-V	V8	4.8	5.4	30 (< 60)	< 480	5	- 3	4	> 0.8
DZ23C5V6-V	V9	5.2	6	10 (< 40)	< 400	5	- 2	6	> 1
DZ23C6V2-V	V10	5.8	6.6	4.8 (< 10)	< 200	5	- 1	7	> 2
DZ23C6V8-V	V11	6.4	7.2	4.5 (< 8)	< 150	5	2	7	> 3
DZ23C7V5-V	V12	7	7.9	4 (< 7)	< 50	5	- 3	7	> 5
DZ23C8V2-V	V13	7.7	8.7	4.5 (< 7)	< 50	5	4	7	> 6
DZ23C9V1-V	V14	8.5	9.6	4.8 (< 10)	< 50	5	5	8	> 7
DZ23C10-V	V15	9.4	10.6	5.2 (< 15)	< 70	5	5	8	> 7.5
DZ23C11-V	V16	10.4	11.6	6 (< 20)	< 70	5	5	9	> 8.5
DZ23C12-V	V17	11.4	12.7	7 (< 20)	< 90	5	6	9	> 9
DZ23C13-V	V18	12.4	14.1	9 (< 25)	< 110	5	7	9	> 10
DZ23C15-V	V19	13.8	15.6	11 (< 30)	< 110	5	7	9	> 11
DZ23C16-V	V20	15.3	17.1	13 (< 40)	< 170	5	8	9.5	> 12
DZ23C18-V	V21	16.8	19.1	18 (< 50)	< 170	5	8	9.5	> 14
DZ23C20-V	V22	18.8	21.2	20 (< 50)	< 220	5	8	10	> 15
DZ23C22-V	V23	20.8	23.3	25 (< 55)	< 220	5	8	10	> 17
DZ23C24-V	V24	22.8	25.6	28 (< 80)	< 220	5	8	10	> 18
DZ23C27-V	V25	25.1	28.9	30 (< 80)	< 250	5	8	10	> 20
DZ23C30-V	V26	28	32	35 (< 80)	< 250	5	8	10	> 22.5
DZ23C33-V	V27	31	35	40 (< 80)	< 250	5	8	10	> 25
DZ23C36-V	V28	34	38	40 (< 90)	< 250	5	8	10	> 27
DZ23C39-V	V29	37	41	50 (< 90)	< 300	5	10	12	> 29
DZ23C43-V	V30	40	46	60 (< 100)	< 700	5	10	12	> 32
DZ23C47-V	V31	44	50	70 (< 100)	< 750	5	10	12	> 35
DZ23C51-V	V32	48	54	70 (< 100)	< 750	5	10	12	> 38

¹⁾ Tested with pulses $t_p = 5$ ms

Electrical Characteristics

Part number	Marking code	Zener voltage range ¹⁾		Dynamic resistance		Test current	Temperature coefficient of zener voltage		Reverse voltage
		V_Z at I_Z		r_{zj} at $I_Z = 5 \text{ mA}$, $f = 1 \text{ kHz}$,	r_{zj} at $I_Z = 1 \text{ mA}$, $f = 1 \text{ kHz}$,	I_Z	α_{VZ} at $I_Z = 5 \text{ mA}$		V_R at $I_R = 100 \text{ nA}$
		V		Ω		mA	$10^{-4}/^{\circ}\text{C}$		V
		min.	max.				min.	max.	
DZ23B2V7-V	V1	2.65	2.75	75 (< 83)	< 500	5	- 9	- 4	-
DZ23B3V0-V	V2	2.94	3.06	80 (< 95)	< 500	5	- 9	- 3	-
DZ23B3V3-V	V3	3.23	3.37	80 (< 95)	< 500	5	- 8	- 3	-
DZ23B3V6-V	V4	3.53	3.67	80 (< 95)	< 500	5	- 8	- 3	-
DZ23B3V9-V	V5	3.82	3.98	80 (< 95)	< 500	5	- 7	- 3	-
DZ23B4V3-V	V6	4.21	4.39	80 (< 95)	< 500	5	- 6	- 1	-
DZ23B4V7-V	V7	4.61	4.79	70 (< 78)	< 500	5	- 5	2	-
DZ23B5V1-V	V8	5	5.2	30 (< 60)	< 480	5	- 3	4	> 0.8
DZ23B5V6-V	V9	5.49	5.71	10 (< 40)	< 400	5	- 2	6	> 1
DZ23B6V2-V	V10	6.08	6.32	4.8 (< 10)	< 200	5	- 1	7	> 2
DZ23B6V8-V	V11	6.66	6.94	4.5 (< 8)	< 150	5	2	7	> 3
DZ23B7V5-V	V12	7.35	7.65	4 (< 7)	< 50	5	- 3	7	> 5
DZ23B8V2-V	V13	8.04	8.36	4.5 (< 7)	< 50	5	4	7	> 6
DZ23B9V1-V	V14	8.92	9.28	4.8 (< 10)	< 50	5	5	8	> 7
DZ23B10-V	V15	9.8	10.2	5.2 (< 15)	< 70	5	5	8	> 7.5
DZ23B11-V	V16	10.8	11.2	6 (< 20)	< 70	5	5	9	> 8.5
DZ23B12-V	V17	11.8	12.2	7 (< 20)	< 90	5	6	9	> 9
DZ23B13-V	V18	12.7	13.3	9 (< 25)	< 110	5	7	9	> 10
DZ23B15-V	V19	14.7	15.3	11 (< 30)	< 110	5	7	9	> 11
DZ23B16-V	V20	15.7	16.3	13 (< 40)	< 170	5	8	0.5	> 12
DZ23B18-V	V21	17.6	18.4	18 (< 50)	< 170	5	8	0.5	> 14
DZ23B20-V	V22	19.6	20.4	20 (< 50)	< 220	5	8	10	> 15
DZ23B22-V	V23	21.6	22.4	25 (< 55)	< 220	5	8	10	> 17
DZ23B24-V	V24	23.5	24.5	28 (< 80)	< 220	5	8	10	> 18
DZ23B27-V	V25	26.5	27.5	30 (< 80)	< 250	5	8	10	> 20
DZ23B30-V	V26	29.4	30.6	35 (< 80)	< 250	5	8	10	> 22.5
DZ23B33-V	V27	32.3	33.7	40 (< 80)	< 250	5	8	10	> 25
DZ23B36-V	V28	35.3	36.7	40 (< 90)	< 250	5	8	10	> 27
DZ23B39-V	V29	38.2	39.8	50 (< 90)	< 300	5	10	12	> 29
DZ23B43-V	V30	42.1	43.9	60 (< 100)	< 700	5	10	12	> 32
DZ23B47-V	V31	46.1	47.9	70 (< 100)	< 750	5	10	12	> 35
DZ23B51-V	V32	50	52	70 (< 100)	< 750	5	10	12	> 38

¹⁾ Tested with pulses $t_p = 5 \text{ ms}$

Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

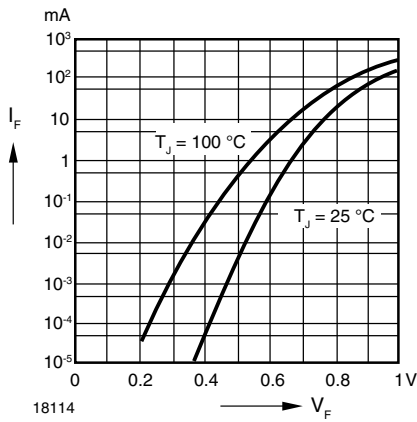


Figure 1. Forward characteristics

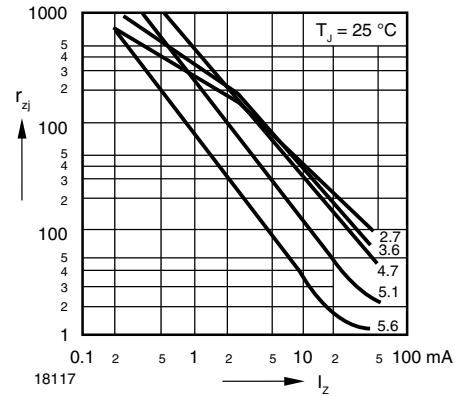


Figure 4. Dynamic Resistance vs. Zener Current

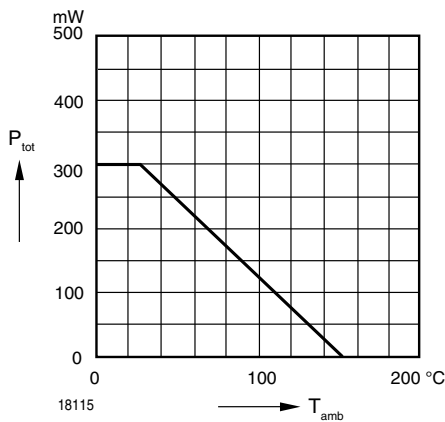


Figure 2. Admissible Power Dissipation vs. Ambient Temperature

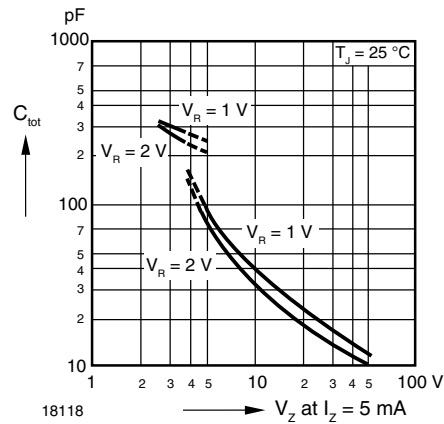


Figure 5. Capacitance vs. Zener Voltage

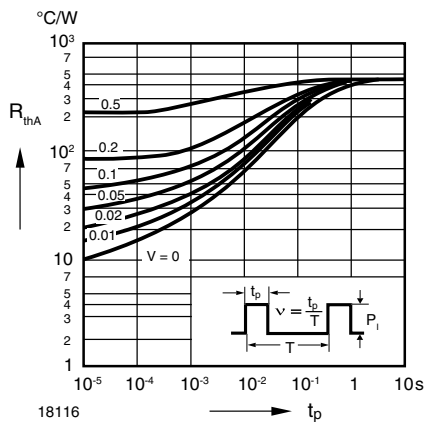


Figure 3. Pulse Thermal Resistance vs. Pulse Duration

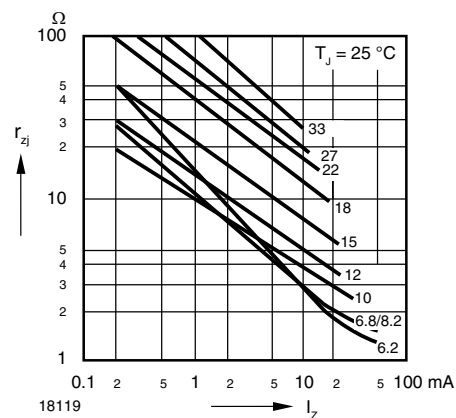


Figure 6. Dynamic Resistance vs. Zener Current

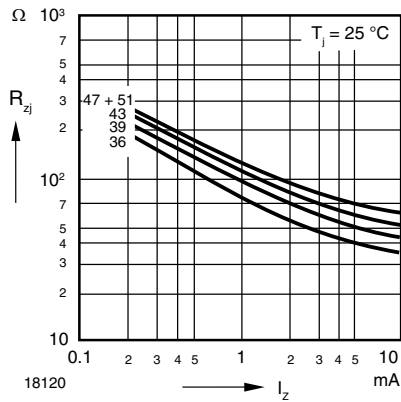


Figure 7. Dynamic Resistance vs. Zener Current

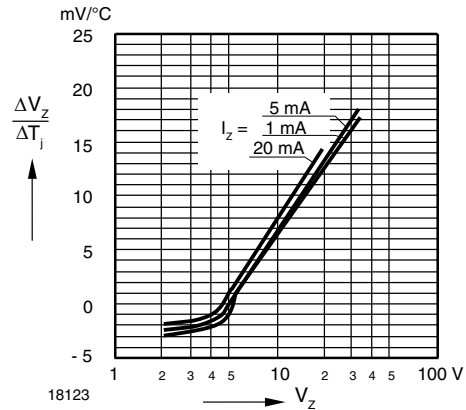


Figure 10. Temperature Dependence of Zener Voltage vs. Zener Voltage

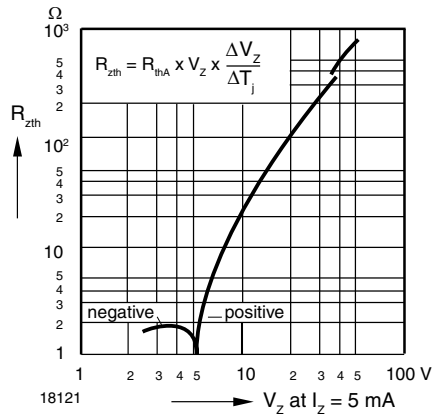


Figure 8. Thermal Differential Resistance vs. Zener Voltage

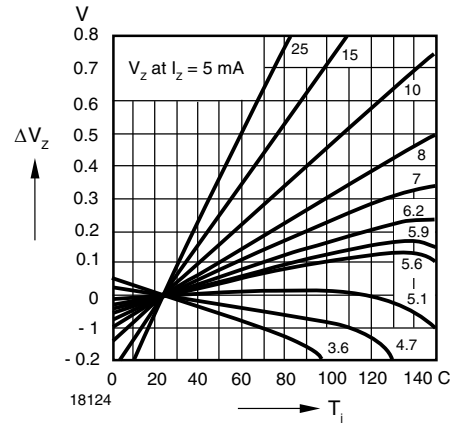


Figure 11. Change of Zener Voltage vs. Junction Temperature

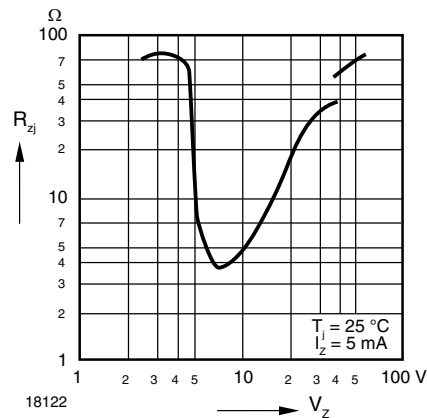


Figure 9. Dynamic Resistance vs. Zener Voltage

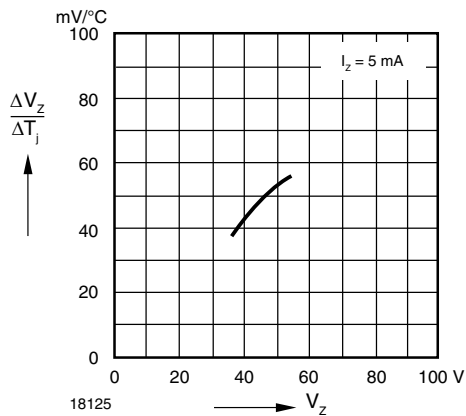


Figure 12. Temperature Dependence of Zener Voltage vs. Zener Voltage

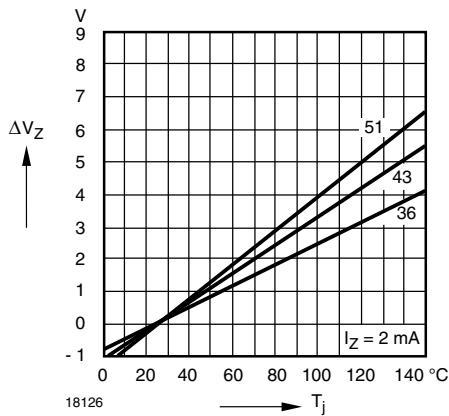


Figure 13. Change of Zener Voltage vs. Junction Temperature

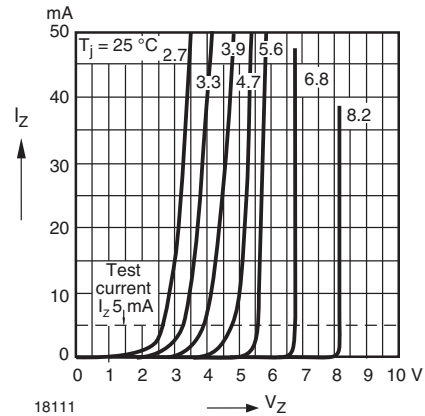


Figure 16. Breakdown Characteristics

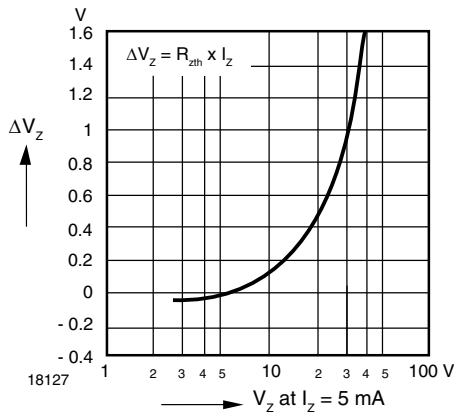


Figure 14. Change of Zener voltage from turn-on up to the point of thermal equilibrium vs. Zener voltage

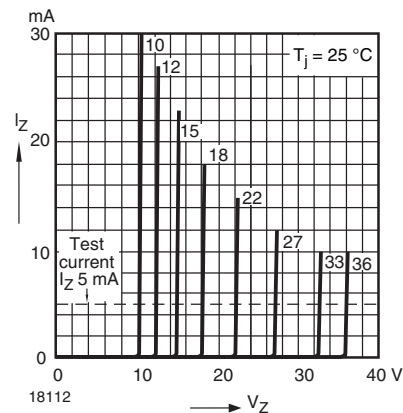


Figure 17. Breakdown Characteristics

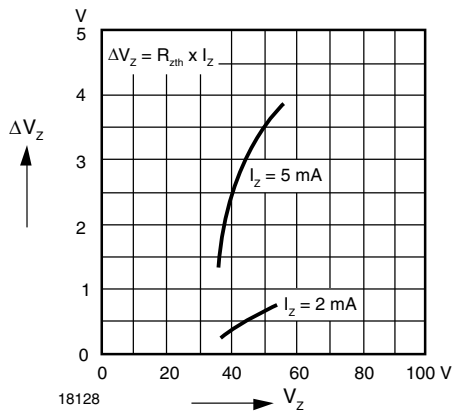


Figure 15. Change of Zener voltage from turn-on up to the point of thermal equilibrium vs. Zener voltage


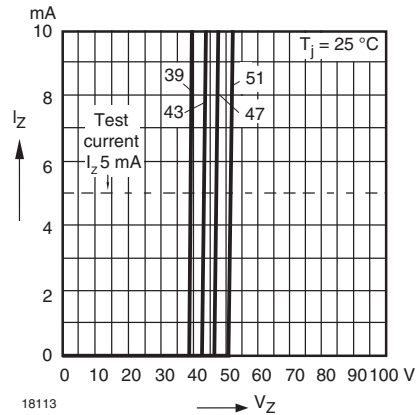


Figure 18. Breakdown Characteristics




Layout for R_{thJA} test

Thickness: fiberglass 0.059 in. (1.5 mm)


Copper leads 0.012 in. (0.3 mm)

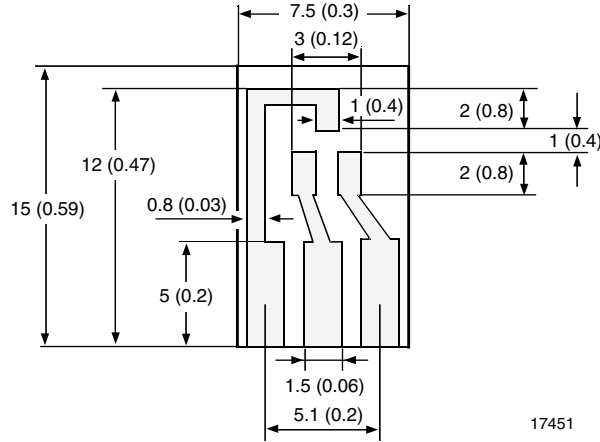

Package Dimensions in millimeters (inches): SOT-23

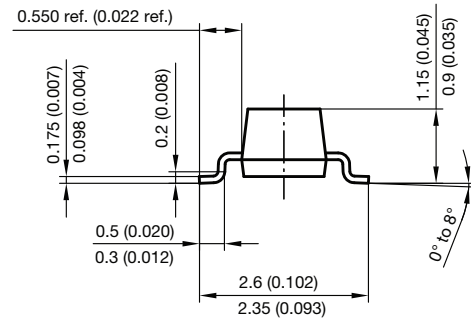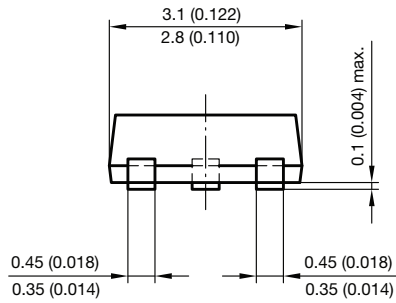

Foot print recommendation:

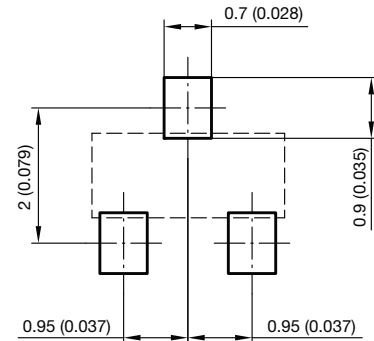

Document no.: 6.541-5014.01-4

Rev. 8 - Date: 23.Sept.2009

17418



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.