


- Designed for Complementary Use with BD896, BD898, BD900 and BD902
- 70 W at 25°C Case Temperature
- 8 A Continuous Collector Current
- 8 A Continuous Collector Current
- Minimum  $h_{FE}$  of 750 at 3V, 3A

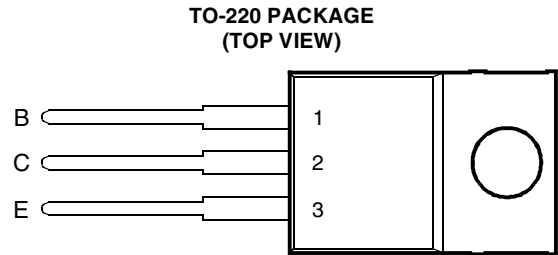

Pin 2 is in electrical contact with the mounting base.

MDTRACA

**absolute maximum ratings at 25°C case temperature (unless otherwise noted)**

RATING		SYMBOL	VALUE	UNIT
Collector-base voltage ( $I_E = 0$ )	BD895	$V_{CBO}$	45	V
	BD897		60	
	BD899		80	
	BD901		100	
Collector-emitter voltage ( $I_B = 0$ )	BD895	$V_{CEO}$	45	V
	BD897		60	
	BD899		80	
	BD901		100	
Base-emitter voltage		$V_{EBO}$	5	V
Continuous collector current		$I_C$	8	A
Continuous base current		$I_B$	0.3	A
Continuous device dissipation at (or below) 25°C case temperature (see Note 1)		$P_{tot}$	70	W
Continuous device dissipation at (or below) 25°C free air temperature (see Note 2)		$P_{tot}$	2	W
Operating free-air temperature range		$T_A$	-65 to +150	°C
Operating junction temperature range		$T_j$	-65 to +150	°C
Storage temperature range		$T_{stg}$	-65 to +150	°C

NOTES: 1. Derate linearly to 150°C case temperature at the rate of 0.56 W/°C.  
2. Derate linearly to 150°C free air temperature at the rate of 16 mW/°C.

**PRODUCT INFORMATION**

AUGUST 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.

**electrical characteristics at 25°C case temperature (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{(BR)CEO}$ Collector-emitter breakdown voltage	$I_C = 100 \text{ mA}$ $I_B = 0$ (see Note 3)	BD895 45 BD897 60 BD899 80 BD901 100			V
$I_{CEO}$ Collector-emitter cut-off current	$V_{CE} = 30 \text{ V}$ $I_B = 0$ $V_{CE} = 30 \text{ V}$ $I_B = 0$ $V_{CE} = 40 \text{ V}$ $I_B = 0$ $V_{CE} = 50 \text{ V}$ $I_B = 0$	BD895 BD897 BD899 BD901		0.5 0.5 0.5 0.5	mA
$I_{CBO}$ Collector cut-off current	$V_{CB} = 45 \text{ V}$ $I_E = 0$ $V_{CB} = 60 \text{ V}$ $I_E = 0$ $V_{CB} = 80 \text{ V}$ $I_E = 0$ $V_{CB} = 100 \text{ V}$ $I_E = 0$ $V_{CB} = 45 \text{ V}$ $I_E = 0$ $T_C = 100^\circ\text{C}$ $V_{CB} = 60 \text{ V}$ $I_E = 0$ $T_C = 100^\circ\text{C}$ $V_{CB} = 80 \text{ V}$ $I_E = 0$ $T_C = 100^\circ\text{C}$ $V_{CB} = 100 \text{ V}$ $I_E = 0$ $T_C = 100^\circ\text{C}$	BD895 BD897 BD899 BD901 BD895 BD897 BD899 BD901		0.2 0.2 0.2 0.2 2 2 2 2	mA
$I_{EBO}$ Emitter cut-off current	$V_{EB} = 5 \text{ V}$ $I_C = 0$ (see Notes 3 and 4)			2	mA
$h_{FE}$ Forward current transfer ratio	$V_{CE} = 3 \text{ V}$ $I_C = 3 \text{ A}$ (see Notes 3 and 4)	750			
$V_{CE(sat)}$ Collector-emitter saturation voltage	$I_B = 12 \text{ mA}$ $I_C = 3 \text{ A}$ (see Notes 3 and 4)			2.5	V
$V_{BE(on)}$ Base-emitter voltage	$V_{CE} = 3 \text{ V}$ $I_C = 3 \text{ A}$ (see Notes 3 and 4)			2.5	V
$V_F$ Parallel diode forward voltage	$I_F = 8 \text{ A}$			3.5	V

NOTES: 3. These parameters must be measured using pulse techniques,  $t_p = 300 \mu\text{s}$ , duty cycle  $\leq 2\%$ .

4. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

**thermal characteristics**


PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$ Junction to case thermal resistance			1.79	°C/W
$R_{\theta JA}$ Junction to free air thermal resistance			62.5	°C/W

**resistive-load-switching characteristics at 25°C case temperature**


PARAMETER	TEST CONDITIONS †	MIN	TYP	MAX	UNIT
$t_{on}$ Turn-on time	$I_C = 3 \text{ A}$ $I_{B(on)} = 12 \text{ mA}$ $I_{B(off)} = -12 \text{ mA}$		1		$\mu\text{s}$
$t_{off}$ Turn-off time	$V_{BE(off)} = -3.5 \text{ V}$ $R_L = 10 \Omega$ $t_p = 20 \mu\text{s}$ , $dc \leq 2\%$		5		$\mu\text{s}$

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.


**TYPICAL CHARACTERISTICS**

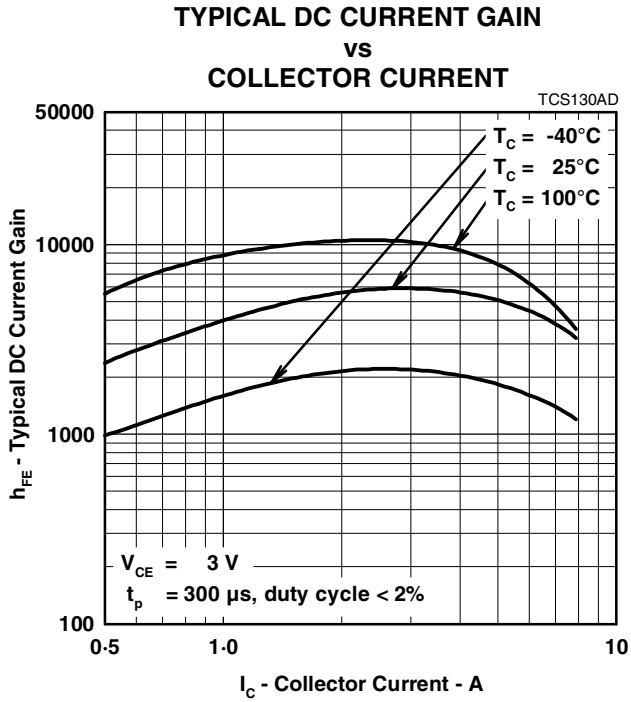

**Figure 1.**

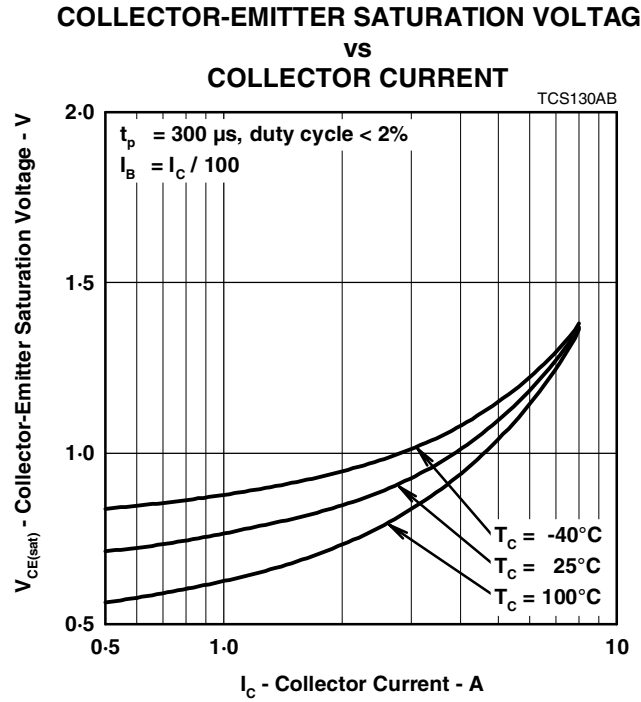

**Figure 2.**

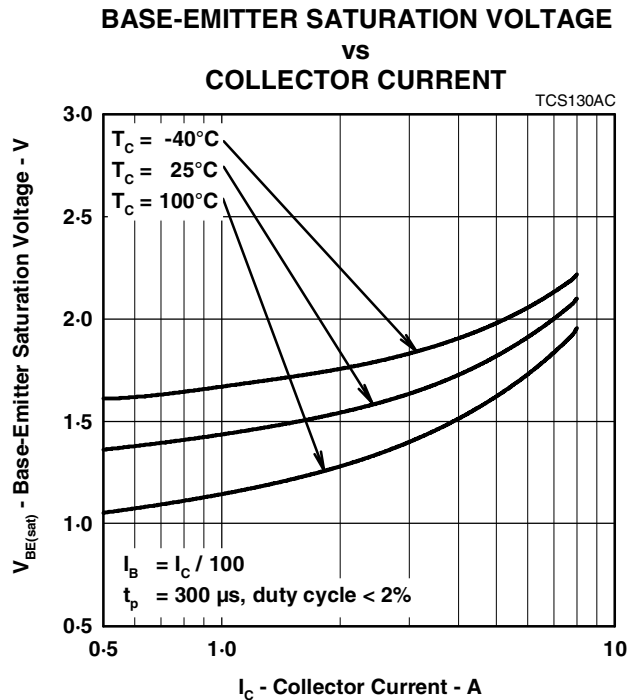

**Figure 3.**

**PRODUCT INFORMATION**

AUGUST 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.

**MAXIMUM SAFE OPERATING REGIONS**

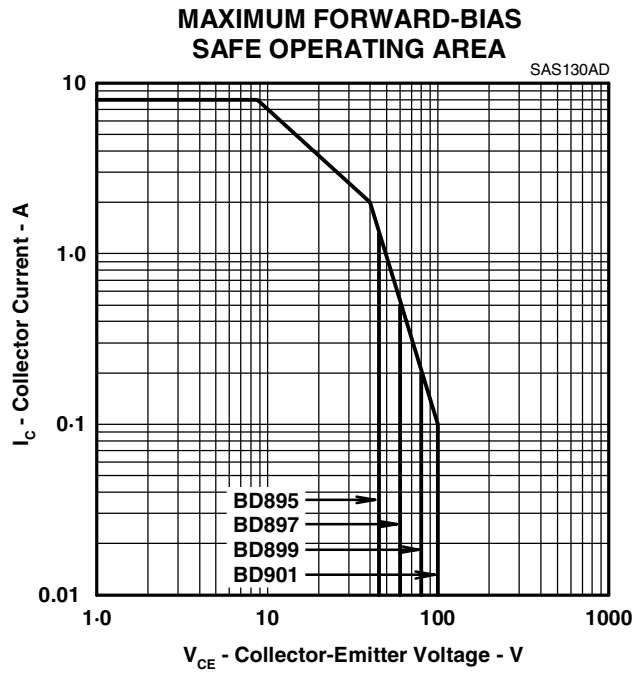


Figure 4.

**THERMAL INFORMATION**

**MAXIMUM POWER DISSIPATION  
vs  
CASE TEMPERATURE**

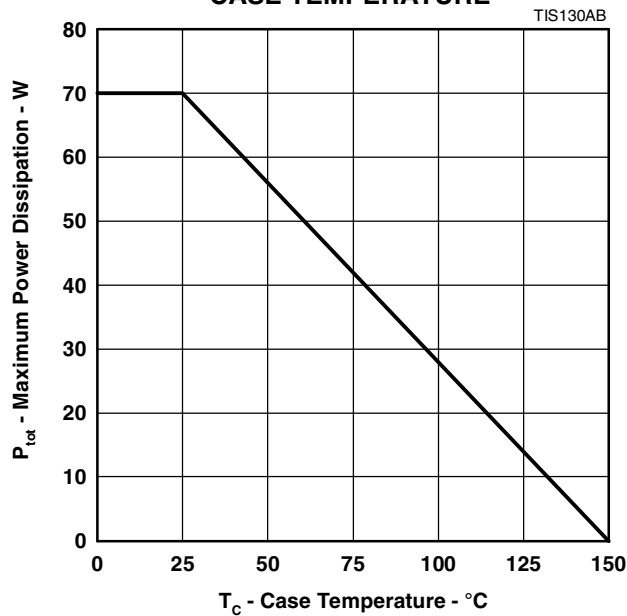


Figure 5.

**PRODUCT INFORMATION**

AUGUST 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.