
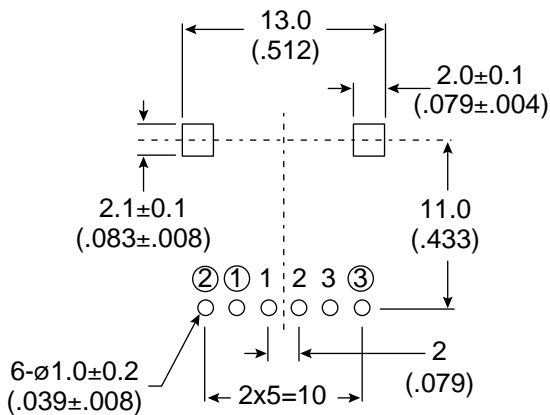
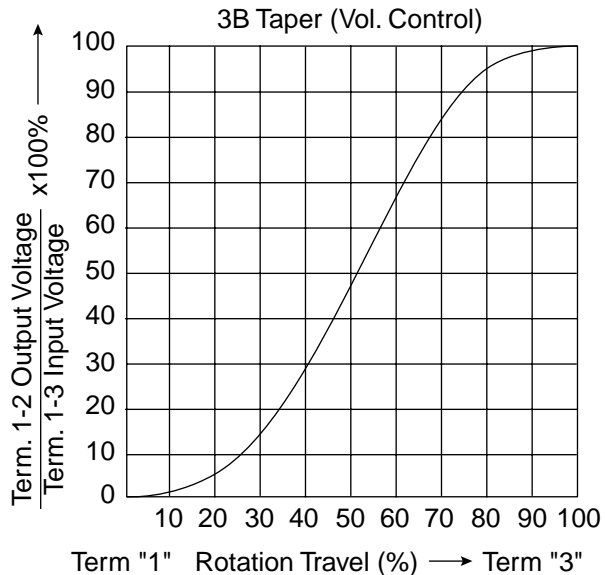




Dimensions: mm and (In.)

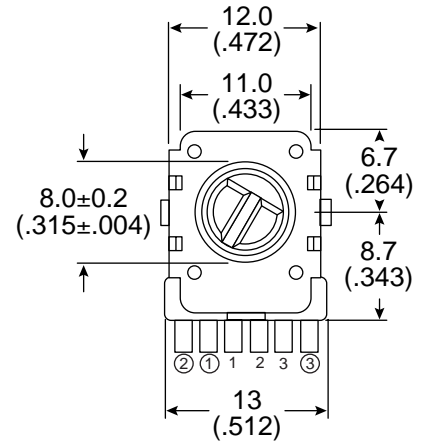

P.C.B. Mounting Hole Detail

Specifications:

- Mechanical Characteristics:
 - Overall rotation angle: 300±5°
 - Operation torque: 20~200 gf-cm. (rotational speed 60°/1 sec)
- Electrical Characteristics:
 - Overall resistance range: 1KΩ~1MΩ (tolerance±20%)
 - Power rating: 0.05W (tolerance±30%)
 - Taper: Linear
 - Rotation noise (refer to JIS): 100mV max. (W :250mV max)
 - Insulation resistance: 100MΩ min. at DC 250 volts
 - Dielectric test: Units shall be designed to withstand 300V AC between resistance elements and case for a period of one minute without damage or arcing.
 - Maximum operating voltage: 50V AC this potentiometer is designed for AC voltage only.
- Endurance Characteristics:
 - Rotational life: More than 15,000 cycles