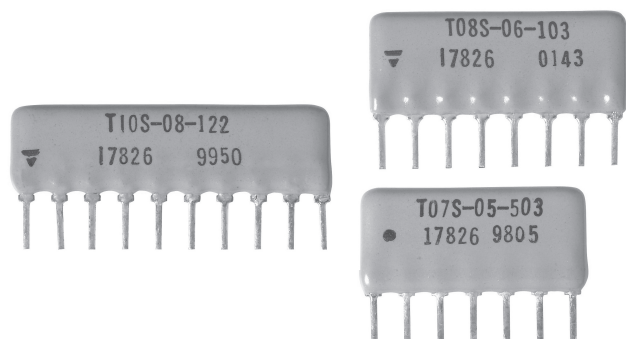


Thick Film Resistor Networks, Single-In-Line, Conformal Coated SIP



FEATURES

- 4 bit to 8 bit, R/2R ladder networks for D/A and A/D converter with bi-polar or CMOS switches
- Reduces total assembly costs
- Resistor element protected by tough epoxy conformal coating
- Thick film resistive elements
- Compliant to RoHS directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition



RoHS*
COMPLIANT
HALOGEN
FREE

STANDARD ELECTRICAL SPECIFICATIONS						
GLOBAL MODEL/ PIN NO.	BITS	POWER RATING ELEMENT $P_{70^{\circ}\text{C}}$ W	STANDARD RESISTANCE VALUES ⁽¹⁾ Ω	TOLERANCE \pm %	TEMPERATURE COEFFICIENT (- 55 °C to + 125 °C) \pm ppm/°C	LINEARITY (- 55 °C to 125 °C)
T06S	04	0.050	5K, 10K, 25K, 50K, 100K	2	100	\pm 0.5 LSB
T07S	05					
T08S	06					
T09S	07					
T10S	08					

Note

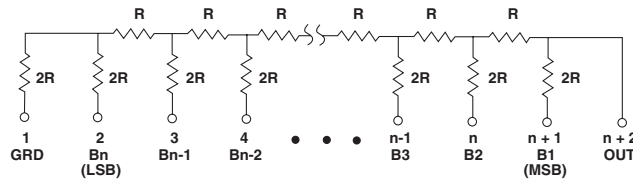
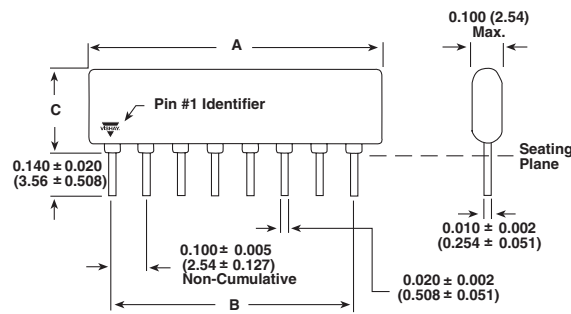
⁽¹⁾ Other values available on special order

GLOBAL PART NUMBER INFORMATION				
New Global Part Numbering: T10S08100KRB (preferred part number format)				
T	1	0	S	0
0	8	1	0	0
K	R	B		
GLOBAL MODEL	NUMBER OF BITS	RESISTANCE VALUE [R]	TERMINAL FINISH	PACKAGING
T06S = 6 pins T07S = 7 pins T08S = 8 pins T09S = 9 pins T10S = 10 pins	04 = 4 bits (6 pins) 05 = 5 bits (7 pins) 06 = 6 bits (8 pins) 07 = 7 bits (9 pins) 08 = 8 bits (10 pins)	K = k Ω 5K00 = 5 k Ω 5K10 = 5.1 k Ω 100K = 100 k Ω Reference schematic if R = 5 k Ω , then 2R = 10 k Ω if R = 100 k Ω , then 2R = 200 k Ω	R = Sn60/Pb40 C = Sn95.5/Ag3.9/Cu0.6	B = Bulk
Historical Part Numbering: T10S08104 (will continue to be accepted)				
T10S	08	104		
HISTORICAL MODEL	NUMBER OF BITS	RESISTANCE VALUE [R]	TERMINAL FINISH	

* Pb containing terminations are not RoHS compliant, exemptions may apply

SCHEMATIC

n Bits:
 n = 4 thru 8


DIMENSIONS in inches (millimeters)


NUMBER OF PINS	A (Max.)	B ± 0.005 (0.127)	C (Max.)
6	0.590 (14.99)	0.500 (12.70)	0.350 (8.89)
7	0.690 (17.53)	0.600 (15.24)	0.350 (8.89)
8	0.790 (20.07)	0.700 (17.78)	0.350 (8.89)
9	0.890 (22.61)	0.800 (20.32)	0.350 (8.89)
10	0.990 (25.15)	0.900 (22.86)	0.350 (8.89)



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.