

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D1		REVISED PER ECO-11-005033	22MAR11	RK	HMR

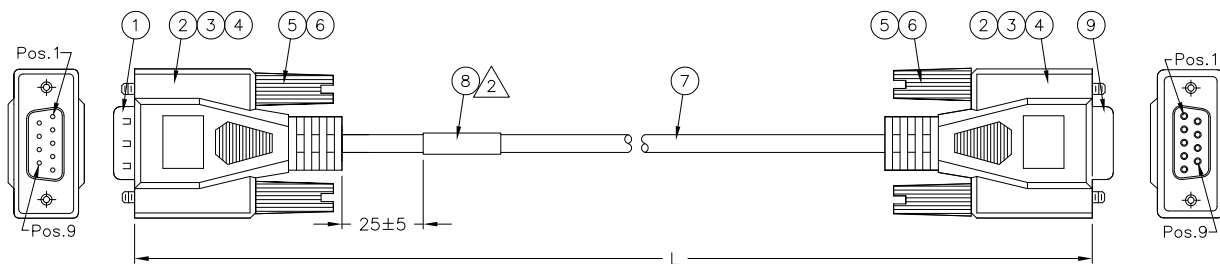

PIN ASSIGNMENT :

DB9 F.	1	2	3	4	5	6	7	8	9	Shell
										Drain
DB9 M.	1	2	3	4	5	6	7	8	9	Shell

621808-2	120.0 <sup>+5.00</sup> / <sub>-2.00</sub>	10	2 OHM MAX
621808-1	72.0 <sup>+6.00</sup> / <sub>-2.00</sub>	6	1 OHM MAX
PART NO.	"L" LENGTH	LABEL XX'	CONTINUITY RESISTANCE

NOTES:

- PACKAGED IN CTG STANDARD PRINTED ZIPLOCK POLYBAG.
- LABEL INFORMATION AS FOLLOWS:  

621808-XX
1938943000A
- TEST REQUIREMENT:  
 CONTINUITY RESISTANCE: SEE TABLE.  
 INSULATION RESISTANCE: 50 M ohm MIN.  
 HI-POT TEST: DC 300V/0.01 Sec MIN.  
 PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY ENVIRONMENTAL STANDARD 230-702.

1	PC	DB9 FEMALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: NICKEL PLATED, INSULATION COLOR: BLACK. RoHS.	9
1	PC	LABEL, SIZE: 25.0*35.0MM, WHITE: 25.0*13.0MM.	8
AR	MR	UL2464 9C*28AWG+AL/FOIL+DRAIN, COLOR: BEIGE.	7
2	PC	#4-40 THUMBSCREW.	6
AR	KG	MOLDED PVC, 30P, COLOR: BEIGE.(BG01).	5
AR	MR	HEAT SHRINK TUBING, 1.5MM, COLOR: BLACK.	4
AR	KG	OVER MOLD PVC, 40P, COLOR: BEIGE.(BG01).	3
AR	KG	INNER MOLD PE	2
1	PC	DB9 MALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: NICKEL PLATED, INSULATION COLOR: BLACK. RoHS.	1
QTY	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11-19-96 D.EISENTRAUT	TE Connectivity	
DIMENSIONS: INCHES		CHK STEVEN ZHOU	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD SINGOL HE	CABLE ASSY, DB9 FEMALE TO MALE, OVERMOLDED	
0 PLC ± -		PRODUCT SPEC	-	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± -		WEIGHT	-	
3 PLC ± -		SIZE	A3	
4 PLC ± -		CAGE CODE	00779	
ANGLES ± -		DRAWING NO	C-621808	
FINISH		RESTRICTED TO	-	
MATERIAL		CUSTOMER DRAWING	SCALE	1:1
		SHEET	1 of 1	
		REV	D1	