


Materials and Finish


Base: ABS Plastic*
 Cover: ABS Plastic
 *not recommended for wave soldering process

Barrel: Brass
 Plating: Nickel Plated
 Terminals: Brass
 Plating: Tin Plated
 ground pin: Nickel Plated


Operating Temp:
 -25°C to +70°C

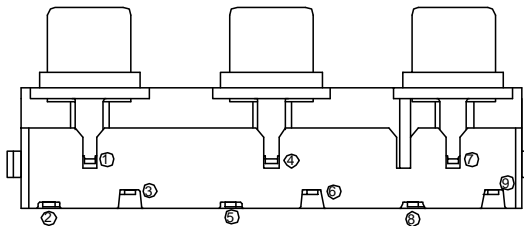

Recommended PCB Layout (Top View)

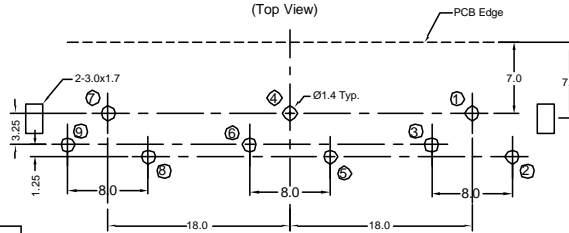

Insert color
 A and B - Red
 A1 and B1 - White
 A2 and B2 - Yellow

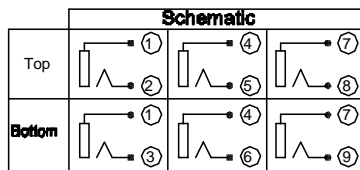

| Tolerances |
|-------------------------|
| X.X ± 0.25 |
| X.XX ± 0.15 |
| Unless Stated Otherwise |

| REV. | DATE | DESCRIPTION | REV. BY | CHK. BY | DRAWN BY | DATE |
|------|---------|-----------------|---------|-------------|----------|---------|
| A1 | 6/27/05 | New Drawing | N.Chang | C. Furumasa | N.Chang | 6/27/05 |
| A2 | 3/28/06 | Release Drawing | H.MA | N/A | | |
| | | | | | | |
| | | | | | | |

KLP42X-62-RR/WW/YY

Stacked RCA Jack ,RoHS Compliant
 6 Jacks, Right Angle PCB Mount

