



Audio

NEUTRIK

 Deutsche
Version

[Home](#)
[About Us](#)
[Products](#)
[Support](#)
[News](#)
[Sitemap](#)

Search

Products only

© Neutrik® AG
All rights reserved
[Legal Notices](#)



Audio


NYS 3.5 mm Plugs

[back](#)

[Print](#)

NYS226G

3.5 mm plug, 2-pole, metal handle with crimp strain relief, gold contacts

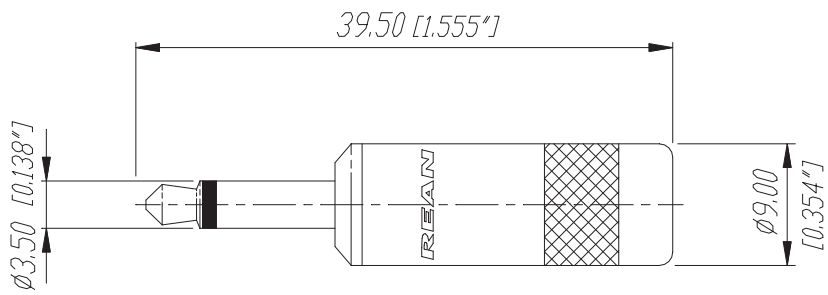

					Werkstoff:	Maßstab:		Datum	Name
				*Lieferant darf ohne Ruecksprache nicht geaendert werden		1:1	Gezeichnet	04.04.02	Batlogg
				Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)			Geprueft		
				Benennung:	3,5 mm Mono Plugs NYS 226		Gesehen		
							Ersetzt durch:		Blatt
							Ersatz fuer:		von Blatt
					REAN		Zeichn. Nr.	3102 ST 22 66	
Ind.	Aenderung	Datum	Name						



NYS 3.5 mm Plugs



NYS226G

There are no technical infos for this product.

Product	
Electrical	
Contact resistance	< 10 mΩ
Dielectric strength	0,5 kVdc
Rated current per contact	depends on mated connector A
Mechanical	
Cable O.D.	≤ 4 mm
Material	
Contact plating	0.2 μm Au
Contacts	CuZn39Pb3
Insert	PA 66 30 % GR
Shell	CuZn39Pb3 gal 2 μm Ni plated
Environmental	
Solderability	Complies with IEC 68-2-20
Temperature range	-20 °C to +70 °C
Optical	
Mobile Cables	