

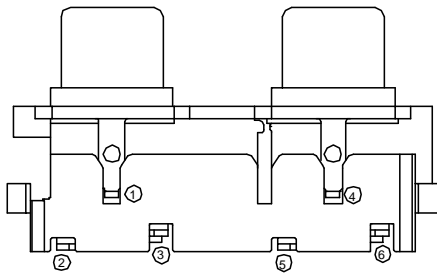


Materials and Finish

Base: PBT UL 94V-0
 Cover: PBT UL 94V-0
 Color: Black
 Barrel: Brass
 Plating: Nickel Plated
 Terminals: Brass
 Plating: Tin Plated
 ground pin: Nickel Plated
 Operating Temp:
 -25°C to +70°C



Recommended PCB Layout (Bottom View)

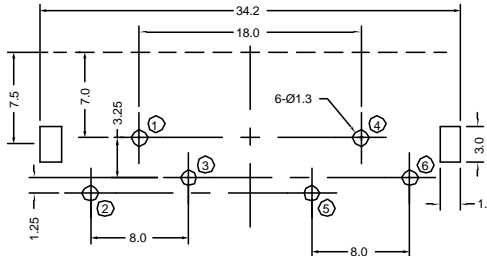

| Tolerances | |
|---------------|--|
| X.X ± 0.25 | |
| X.XX ± 0.15 | |
| Unless Stated | |
| Otherwise | |

| REV. | DATE | DESCRIPTION | REV. BY | CHK. BY | DRAWN BY | DATE |
|------|---------|-----------------|---------|-------------|----------|---------|
| A1 | 6/27/05 | New Drawing | N.Chang | C. Furumasu | N.Chang | 6/27/05 |
| A2 | 3/24/06 | Release Drawing | H. MA | N/A | | |
| A3 | 4/26/06 | ECO#06-030 | H. MA | C.Furumasu | | |
| | | | | | | |
| | | | | | | |

KLP42X-61-YY/YY

Stacked RCA Jack, RoHS Compliant

Right Angle PCB Mount, Yellow-Yellow over Yellow-Yellow

