


2.5mm Mono Jack w/ Switch

161-5330-E



2.5mm Mono Jack w/ Switch

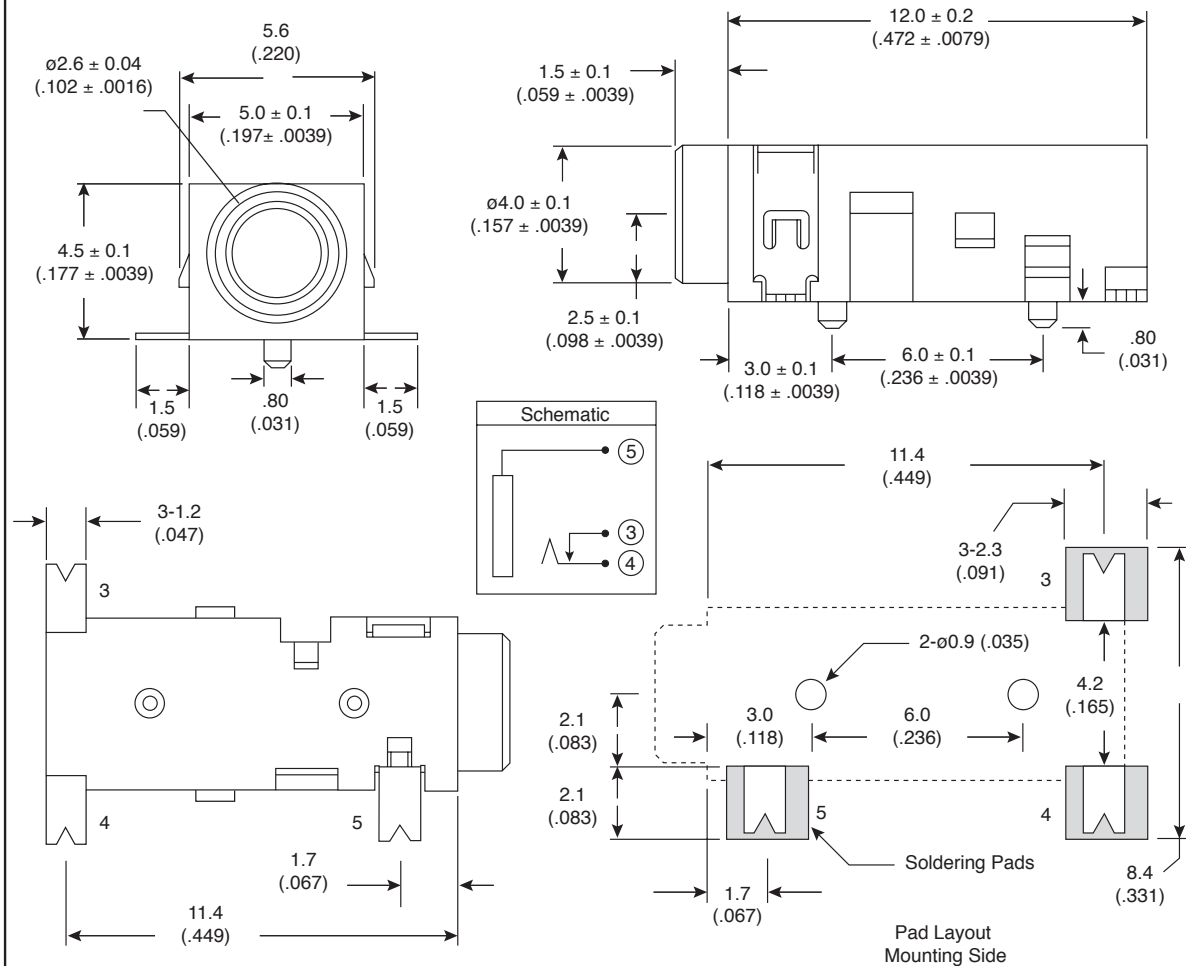

Dimensions: mm

SPECIFICATIONS

| | |
|-------------------------------|-------------------------------|
| Housing: | LCP Black UL94V-0 |
| Terminals: | Phosphor bronze silver plated |
| Tip Terminal: | Cu alloy silver plated |
| Insertion/ Ext Force: | .3-3 Kgs |
| Dielectric Strength: | 250 VAC for 1 min. |
| Insulation Resistance: | 100 M ohm minimum |
| Contact Resistance: | 50 m ohm maximum |
| Life Cycle: | 5000 matings minimum |
| Operating Temperature: | -25°C to +85°C |
| Voltage Rating: | 16.0 VDC |
| Current Rating: | 0.3 A |
| RoHS Compliant | |

Date Last Revised: 6-23-06

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300989

161-5330-E