


## Model 2443K Patch Cord, Double Banana Plug To Miniature Double Banana Plug

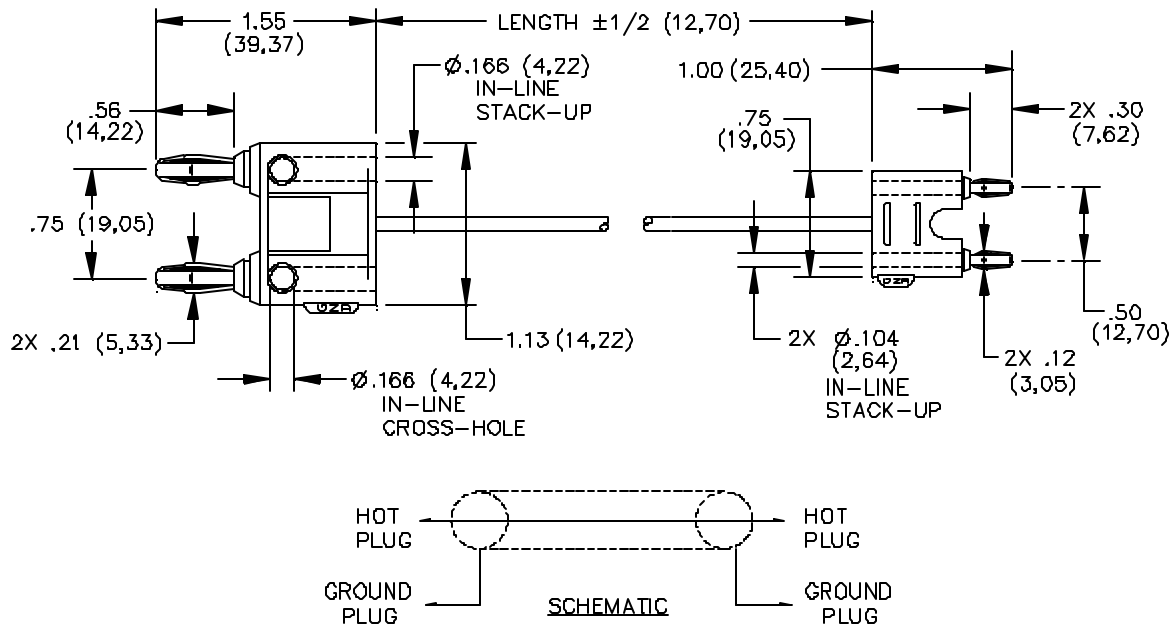

1/2 Hard.

### MATERIALS:

Connector: 1<sup>st</sup> End - Double Banana Plug

Spring: Beryllium Copper per QQ-C-533, Alloy C172, Cond. HT.

Plug Body: Brass per QQ-B-626, Alloy 360, 1/2 hard.

Finish: Nickel plated per QQ-N-290 Class 2, 200/300 microinches.

Insulation: Polypropylene, molded to banana plug bodies and cable. Color matches color of cable.

Marking: "POMONA ELECTRONICS, CALIF."

Cable Type: RG174/U, .100" O.D.

Cap. Pf./ft.: 30.8

Nominal Impedance: 50 Ohms

Connector: 2<sup>nd</sup> End - Miniature Double Banana Plug

Spring - Beryllium Copper per QQ-C-533,

Berylco 25, Cond. H.T.

Plug Body - Brass per QQ-B-626, Alloy 360,

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, Class 1, 200/300 microinches.

Insulation: Same as double banana plug.

Marking: "POMONA ELECTRONICS CALIF."

### RATINGS:

Operating Temperature: +55°C. (+131°F.) Max.

Operating Voltage: 1000 VRMS

**ORDERING INFORMATION:** Model 2443-K-XX

XX = Length in inches. Std. Lengths: 24" (60,96 cm), 36" (91,44 cm), 48" (121,92 cm) & 60" (152,40 cm).

Additional lengths can be quoted upon request.

Ordering Example: 2443-K-36, Cable length will be 36" (9,44 mm) long.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FI\ukeDataSheet\2443\_1\_01.doc

Sales: 800-490-2361 Fax: 888-403-3360

Technical Assistance: 800-241-2060

PomonaACCESS 90822 (800) 444-6785 or (425) 446-6010

More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 1