


Model 2BC-MG Double Banana Plug To Minigator Test Clip Breakouts, Cable Assembly

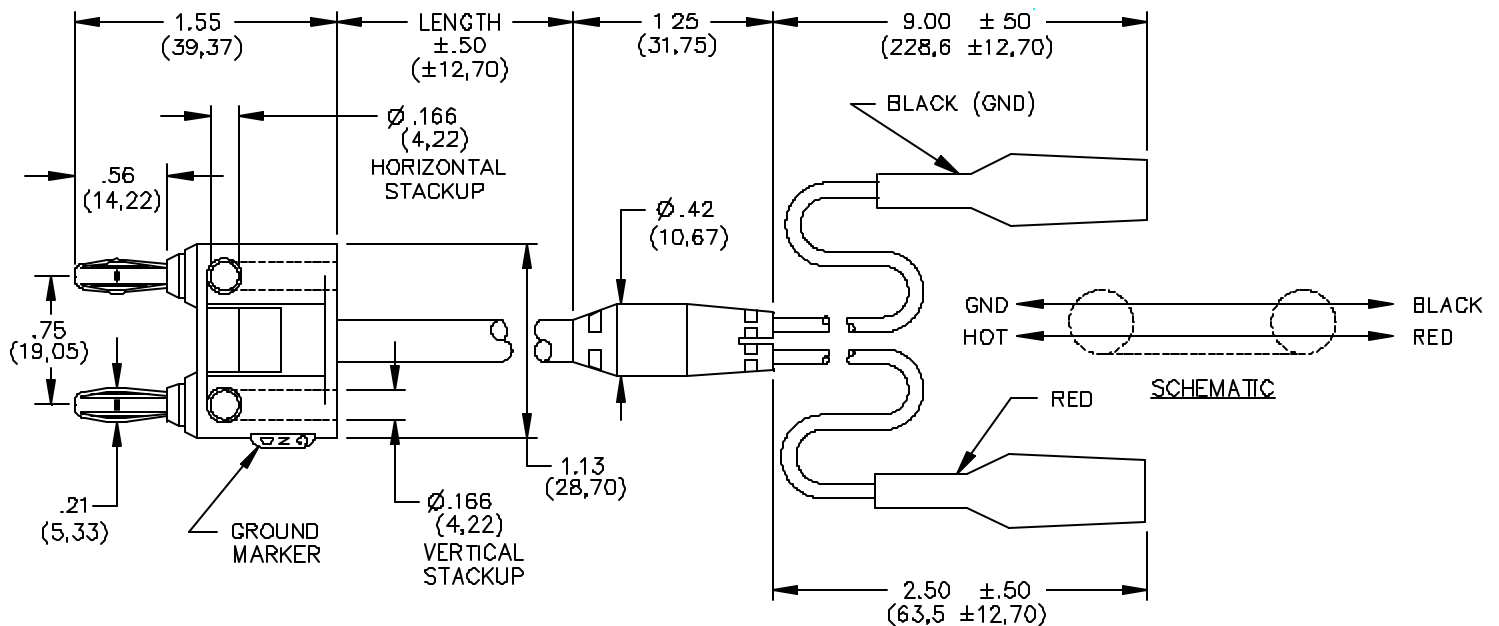

FEATURES:

- Jaws open to .187" Max.
- Ideal for use with Pomona Model 2269 or any standard double Banana Jack
- Allows connection from a double Banana Binding Post to Alligator Clips

MATERIALS:

Double Banana Plug – Spring; Nickel plated Beryllium Copper.
 Body; Nickel plated brass Alloy 360 ½ hard.
 Insulator; Polypropylene, color matches cable
 Cable – RG 58C/U
 Breakout – Molded PVC, color matches cable
 Breakout Leads – 20 AWG. 41 x 36 T.C. PVC insulated .087 inch O.D., Color: One Black, one Red
 Miniature Alligator Clips – Plated steel, vinyl

insulator, color matches wire

RATINGS:

Operating Voltage: 45 VRMS
 Operating Temperature: +122°F (+50°C) Max.
 Cable Capacitance: 30.8 pf/ft
 Cable Impedance: 50 Ohms nominal

ORDERING INFORMATION: Model 2BC-MG-XX

XX = Cable Lengths, Standard Lengths: 18" (457), 24" (610), 30" (762), 36" (914), 48" (1219) & 60" (1524).
 Additional lengths can be quoted upon request.

Ordering Example: 2BA-MG-24

Indicates 24" in length

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FI\LukeDataSheet\2BC-MG_1_01.doc

Sales: 909-469-2900 Fax: 909-629-3317
 Technical Assistance: 800-241-2060

PomonaACCESS 90567 (800) 444-6785 or (949) 253-3858
 More drawings available at www.pomonaelectronics.com

Page 1 of 1