

**Material and Finish**


Insulator: ABS Thermoplastic, UL94-HB Rated, Black Color  
 RCA Jack Color:  
 Jack A: Yellow (ABS)  
 Jack B: White (ABS)  
 Jack C: Red (ABS)  
 RCA Barrel, Pin R1: SPCC, Nickel Plated  
 RCA Pin R2, R2A: Brass, Tin-Lead plated on termination end, Silver plated on contact  
 Mini-DIN Shell: Brass, Nickel Plated  
 Mini-DIN Contacts: Phosphor Bronze, Tin-Lead Plated

**Electrical Specifications:**


Operating Temperature:  
 -25°C to +70°C

Part Number	Switch Locations A/B/C
KLPMDG-4L-YWR-222	None
KLPMDG-4L-YWR-322	A only
KLPMDG-4L-YRW-333	A/B/C


Recommended PCB Layout (bottom view)

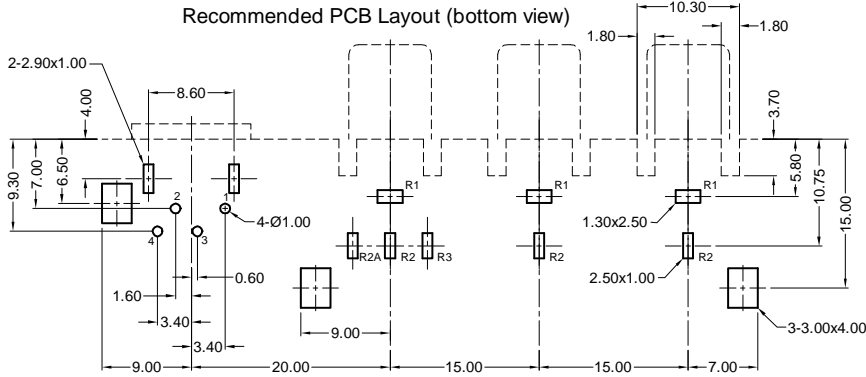


Schematic (222)



Schematic (322)



Schematic (333)



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated
Otherwise



REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	6/26/02	New Drawing	K. Wallace	K. Wallace	K. Wallace	6/26/02
A1	8/30/02	Release Drawing	K. Wallace	K. Wallace		

**KLPMDG-4L-YWR-xxx**

RCA Jack, Ganged, with 4-Pin Mini Din  
 Right Angle, Left-shifted Mini-Din

