


# Stereo Phone Jacks

161-3540, 161-3541

**KOBI**CONN

Stereo Phone Jacks

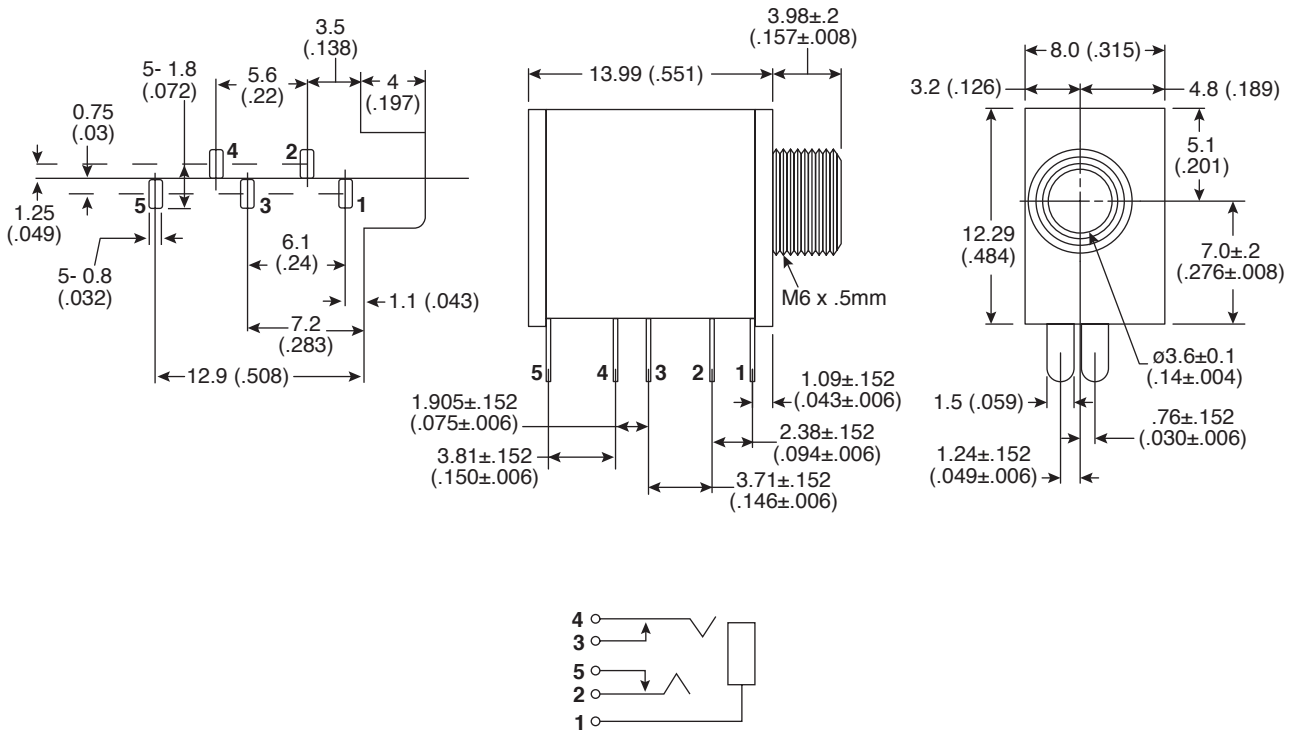

Dimensions: mm (In)

## SPECIFICATIONS

<b>Type:</b>	Stereo Phone with Switch
<b>Dielectric Strength:</b>	250VAC for 1 Minute
<b>Insulation Resistance:</b>	100MΩ min. @ 250VDC
<b>Contact Resistance:</b>	30mΩ max.
<b>Insertion/Extraction Force:</b>	.3Kg ~2Kg
<b>Life:</b>	10,000 Cycles min.
<b>Operating Temperature:</b>	-10°C ~ +70°C
<b>Body:</b>	15% Glass Reinforced PBT
<b>Cover:</b>	Polycarbonate
<b>Springs:</b>	Stainless Steel
<b>Barrel:</b>	Nickel Plated Brass
<b>Bushing:</b>	161-3540 - Nickel Plated Brass; 161-3541 - 15% Glass Reinforced PBT
<b>Terminals:</b>	Silver Plated Phosphor Bronze

Date Last Revised: 10-15-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC-300486

161-3540, 161-3541