


17PP053





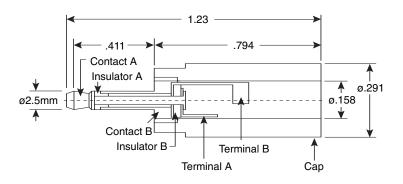



**Dimensions: In.** (except where noted)

SPECIFICATIONS	
Contact Resistance:	50m $Ω$ max.
Insulation Resistance:	100MΩ min. @ 500VDc
Dielectric Strength:	500VAC for 1 Minute
Сар:	ABS Resin
Contact A:	Nickel Plated Brass
Contact B:	Nickel Plated Brass
Terminal A:	Nickel Plated Brass
Terminal B:	Nickel Plated Steel
Insulator A:	Ebonite
Insulator B:	Phenolic Resin

Date Last Revised: 4-19-05

Available from Mouser Electronics 1-800-346-6873 www.mouser.com  $\omega$ 

KC-300540