



3.5mm Shielded Mono Plug

171-3200

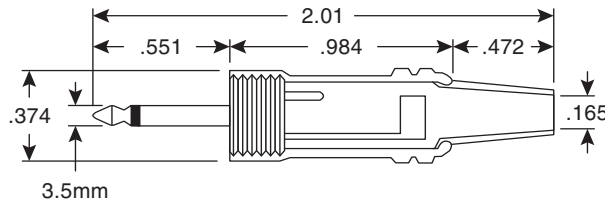

3.5mm Shielded Mono Plug

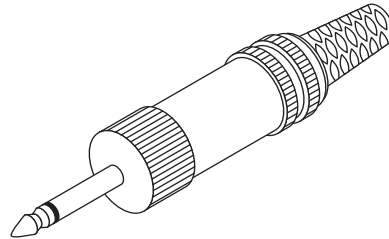

Dimensions: In.
(except where noted)

SPECIFICATIONS

Type:	3.5mm High Reliability Shielded Mono Plug with Strain Relief, Insulated Sleeve and U.S. Tip
Temperature:	70°C
Withstand Voltage:	500VAC for 1 Minute
Insulation Resistance:	100MΩ
Contact Resistance:	50MΩ max.
Cap & Plug:	Nickel Plated Brass
Plug Terminal:	Nickel Plated Brass
Plug Insulator:	ABS
Strain Relief:	PVC

Date Last Revised: 4-18-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300529

171-3200

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.