
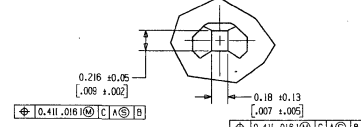

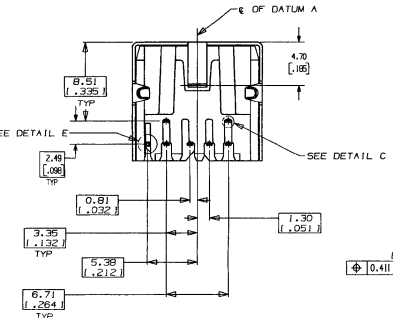
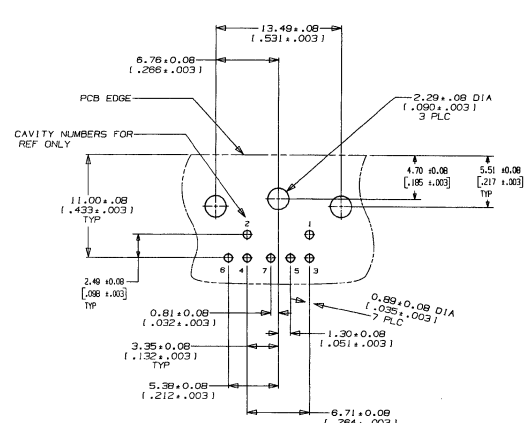
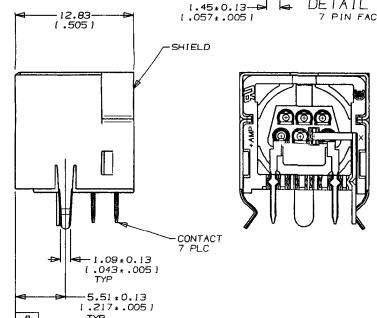
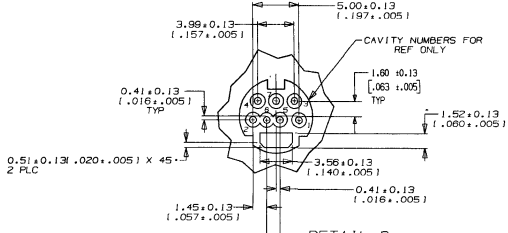
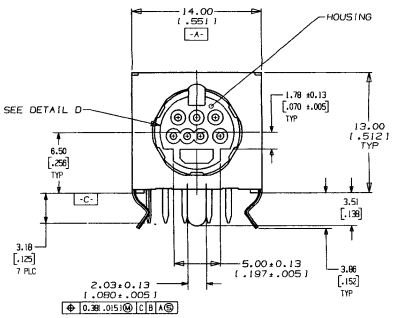


NUMBER 786766
 METRIC
 CONFIDENTIAL INFORMATION
 DIMENSIONS IN MM, 0.007 SCALE PRINT
 PRINT DATE



DETAIL E
SCALE 50:1

DETAIL C
SCALE 50:1
TYPICAL

- NOTES:
- 1. HOUSING: POLYESTER, UL 94V-0 RATED, GRAY.
 - 2. CONTACT & SHIELD: PHOSCONTACT & SHIELD: PHOR BRONZE PER 00-B-750.
 - 3. FINISH: GOLD PLATING PER MIL-G-45204, TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290.
 - 4. CONTACT: 0.78um (1.000030) MIN GOLD FOR A LENGTH OF 1.52 (1.0001) MIN FROM MATING END, 3.05um (1.000120) MIN TIN-LEAD ON OPPOSITE END, BOTH OVER 1.27um (1.000050) MIN NICKEL, ENTIRE CONTACT.
 - 5. SHIELD: 2.54um (1.000100) MIN TIN.
 - 6. HIGH TEMPERATURE POLYESTER, UL 94V-0 RATED, GRAY.
 - 7. HIGH TEMPERATURE POLYESTER, UL 94V-0 RATED, BLACK.
 - 8. PRODUCT SPEC: 108-1225
 - 9. APPLICATION SPEC: 114-40031

786766-3	
786766-2	
786766-1	
ISS MAT'L	PART NO

CIRCUIT 1978 © 1993		CIRCUIT 1978 © 1993		AMP MANUFACTURING SINGAPORE PTE. LTD.		AMP MANUFACTURING SINGAPORE PTE. LTD.	
REVISIONS		MATERIAL		FINISH		RECEPTACLE ASSY, W/HOLD-DOWN, SPECIAL, 7 PIN, RIGHT ANGLE, MINIATURE CIRCULAR DIN	
E	REVISED FROM 0084-07	NIL	OKT	IMP	IMP	SIZE	LOC
B	ADD					A2	DY
A	CHANGE PIN & CONFIGURATION					786766	
D	PLS USE AMP 4000 WAS 02-1088-16	C.O.				SCALE	REV.
LTR	PREVISION RECORD	DR	CHK	DATE	ELUCID	5:1	C

CUSTOMER DRAWING