


SACC-M12FR-5CON-PG 9-VA

Order No.: 1553307




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1553307>

Sensor/actuator connector, female, angled, 5-pos., M12, screw connection, high-grade steel knurl, cable screw connection PG9

Commercial data	
GTIN (EAN)	 4 046356 170222
sales group	D121
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 211 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
11/10/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ

Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------


General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67/IP69K
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material of grip body	PBT
Material, knurls	High-grade steel
Sealing material	NBR
Connection method	Screw connection
Conductor cross section stranded min.	0.25 mm ²
Conductor cross section stranded max.	0.75 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	18
External cable diameter	6 mm ... 8 mm
Status display	No


Diagrams/Drawings

Dimensioned drawing

M12 x 1 female connector, angled

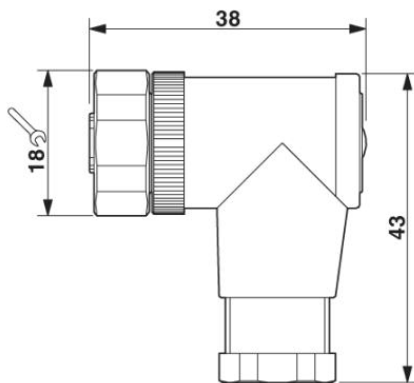

Schematic diagram

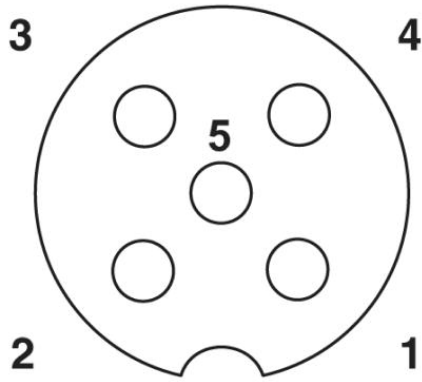

Pin assignment M12 socket, 5-pos., A-coded, socket side view

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;