


DC Power Jack

163-4017-EX



DC Power Jack

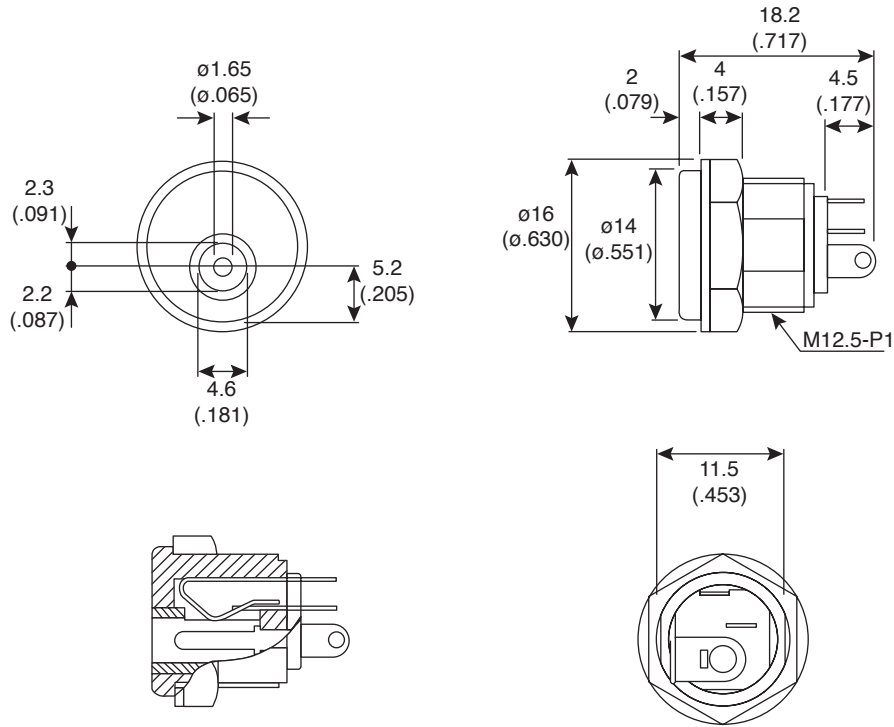

Dimensions: mm (In.)

SPECIFICATIONS	
Rating:	6.3 VDC 2A
Contact resistance:	30 m Ω max.
Dielectric Strength:	500 VAC for one min.
Insulation resistance:	100M Ω min. @ 500VDC
Terminals:	Silver plated brass
Center Pin:	Nickel plated brass
Body:	ABS
RoHS Compliant by Exemption	

Date Last Revised: 12-9-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300844

163-4017-EX