

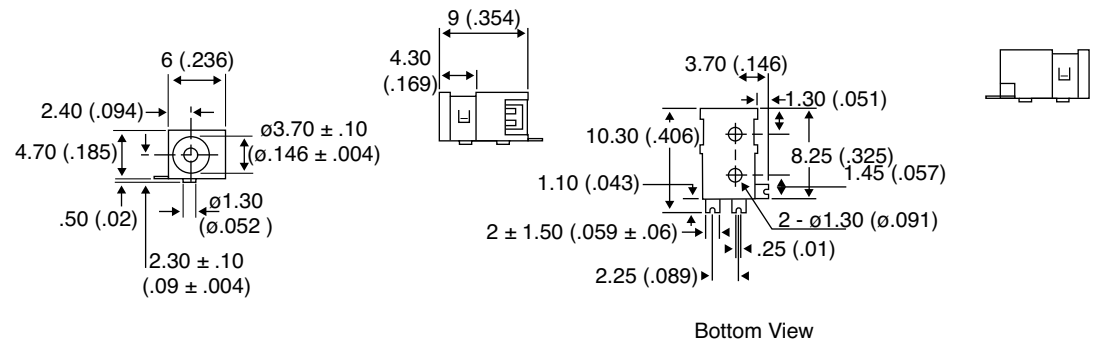

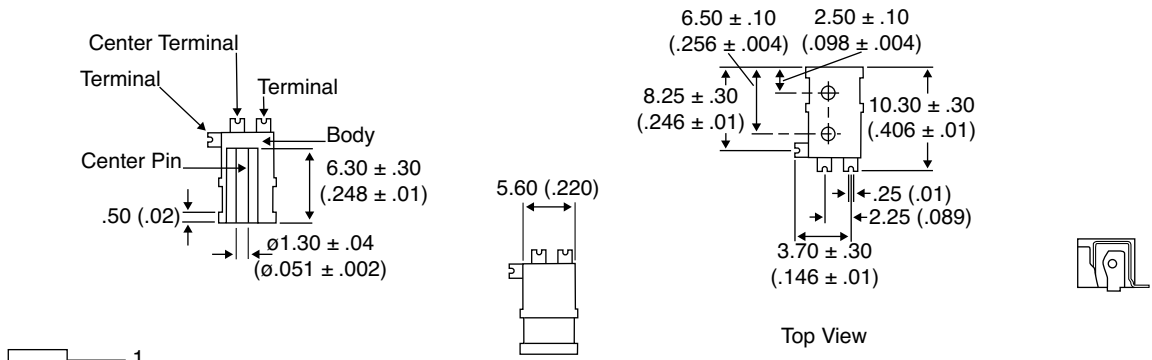



# SMT DC Power Jack

163-4213-EX



SMT DC Power Jack



**DIMENSIONS: mm (IN)**

SPECIFICATIONS	
<b>Rating:</b>	6 VDC 0.5A
<b>Insulation Resistance:</b>	100 Megaohm min. @ 500 VDC
<b>Dielectric Strenght:</b>	250 VAC for one minute
<b>Contact Resistance:</b>	30 miliohm min.
<b>RoHS Compliant by Exemption</b>	

Date Last Revised: 10/24/08

**Available from Mouser Electronics**  
**1-800-346-6873**  
**www.mouser.com**

KC-300928

163-4213-EX

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.