


DC Power Jacks

161-100, 161-201



DC Power Jacks

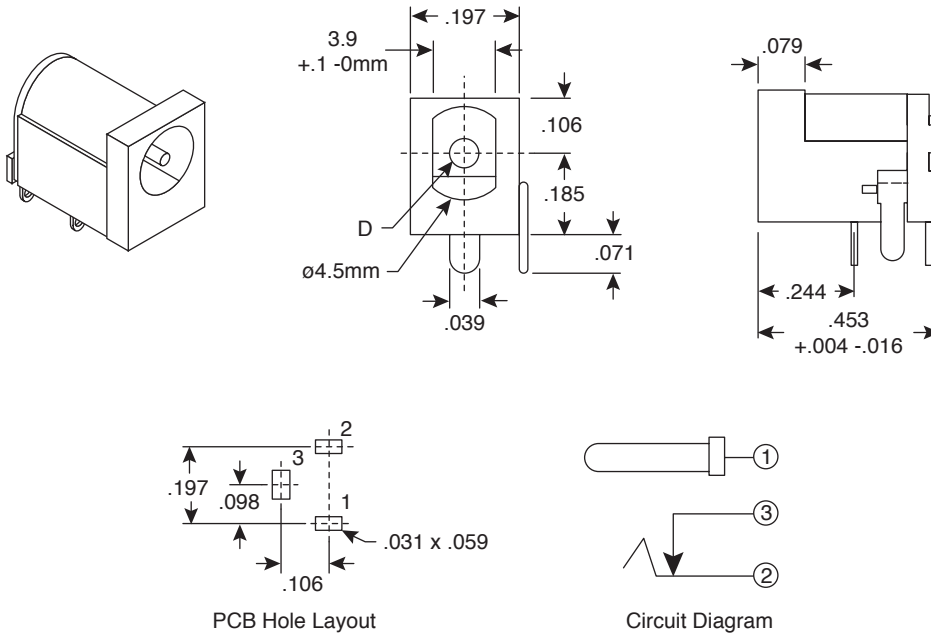

DIMENSIONS: In.
(except where noted)

SPECIFICATIONS	
Insulation resistance:	50m Ω @ 500VDC
Contact resistance:	30m Ω max. @ 1A
Withstand voltage:	250VAC for 1 minute
Flammability:	230°C for 3 seconds
D:	$\phi 1\text{mm}$ (161-100), $\phi 1.3\text{mm}$ (161-201)
Mating plug O.D.:	3.0mm (161-100), 3.4mm (161-201)

Date Last Revised: 10-14-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300380

161-100, 161-201