


DC Power Jack

163-4019

KOBICONN

DC Power Jack

163-4019

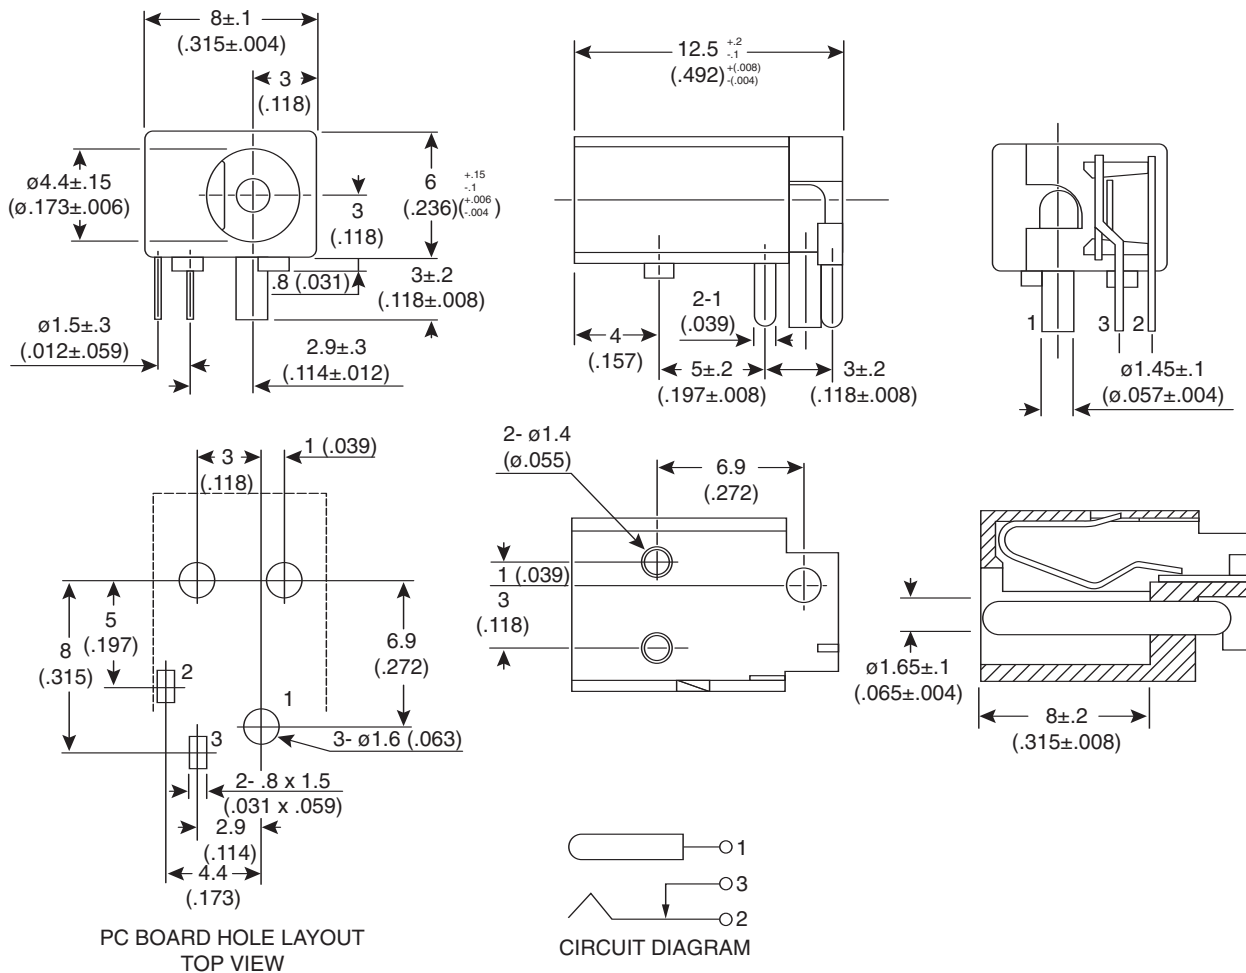

DIMENSIONS: mm (In.)

SPECIFICATIONS	
Terminal:	silver plated brass
Pin:	nickel plated brass
Jack body:	PBT/GT resin
Rating:	6VDC, 2A
Insertion force:	500 ~ 1200gm
Extraction force:	400 ~ 1300gm
Contact resistance:	not more than 30mΩ
Insulation resistance:	not less than 100MΩ
Withstand voltage:	250VAC (50 ~ 60Hz) for one min.
Temperature range:	-20 °C ~ 70 °C
Life test:	5,000 times a min.

Date Last Revised: 3-31-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300384