





THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK
00				
01		REVISED PER EDD-11-004835	11MR11	RK HMR

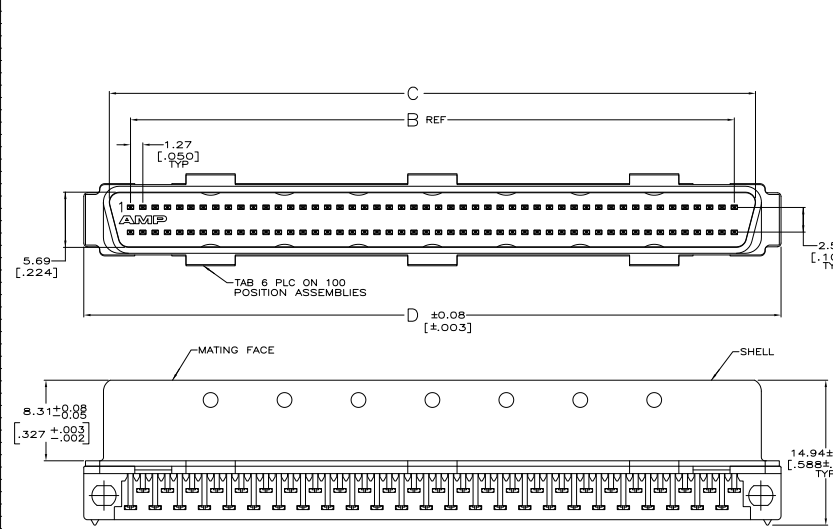

- CONTACTS: PHOSPHOR BRONZE.
- SHELL: CARBON STEEL
- HOUSING: POLYESTER, BLACK, UL 94V-0 RATED.
- TERMINATING COVERS: POLYESTER, UL 94V-0 RATED, COLOR: SEE TABLE
- PLATED WITH EITHER 0.76µm [0.00030] MIN GOLD PLATE OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.76µm [0.00030] MIN TOTAL FOR A LENGTH OF 3.35 [132] MIN FROM MATING END, 1.52µm [0.00060] MIN TIN-LEAD IN TERMINATION AREA, ALL OVER 1.27µm [0.00050] MIN NICKEL.
- 0.25µm [0.00010] MIN TIN-NICKEL OVER 3.81µm [0.00150] MIN NICKEL OVER 2.54µm [0.00100] MIN COPPER.
- RECOMMENDED WIRE: 28 AWG OR 30 AWG, SOLID OR 7 STRAND, PVC INSULATION, REFER TO TABLE BELOW FOR INSULATION DIA.
- 5. COVERS PACKAGED SEPARATE FROM CONNECTORS IN SAME SHIPPING CONTAINER.
- GOLD FLASH FOR A LENGTH OF 3.35 [132] MIN FROM MATING END, 1.27µm [0.00050] MIN TIN-LEAD IN TERMINATION AREA, BOTH OVER 1.27µm [0.00050] MIN NICKEL.
- OBsolete PART NUMBER.
- PLATED WITH EITHER 0.76µm [0.00030] MIN GOLD PLATE OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.76µm [0.00030] MIN TOTAL FOR A LENGTH OF 3.35 [132] MIN FROM MATING END, 3.00µm [0.00118] MIN TIN IN TERMINATION AREA, ALL OVER 1.27µm [0.00050] MIN NICKEL.
- SUPERSEDED BY 750913-4.
- SUPERSEDED BY 1-5750913-5.
- SUPERSEDED BY 5750913-5.
- SUPERSEDED BY 1-5750913-7.
- SUPERSEDED BY 1-5750913-9.
- SUPERSEDED BY 5750913-7.
- SUPERSEDED BY 1-5750913-2.

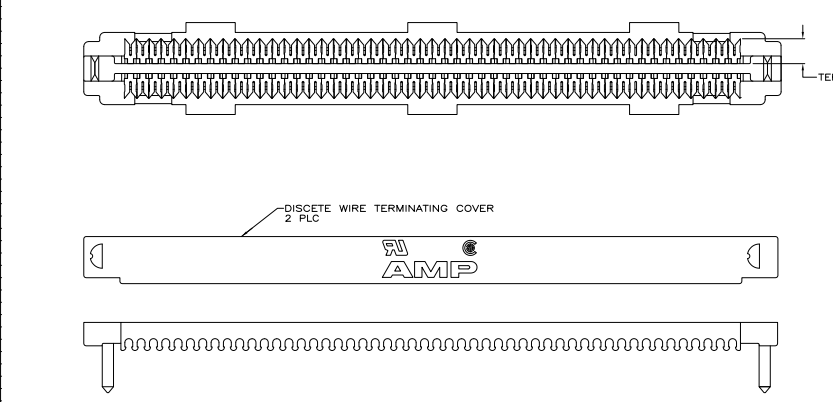

CONTACT FINISH	TERMINATING COVERS COLOR	INSULATION OUTER DIAMETER	D	C	B	A	NO OF POSN	PART NUMBER
GRAY	0.74-0.79	40.11	34.85	30.48	7.44	60	3-750913-5	
	[0.29-0.31]	[1.579]	[1.372]	[1.200]	[.293]			
BLACK	0.81-0.91	40.11	34.85	30.48	7.44	60	2-750913-5	
	[.032-.036]	[1.579]	[1.372]	[1.200]	[.293]			
GRAY	0.74-0.79	71.86	66.60	62.23	9.47	100	2-750913-2	
	[0.29-0.31]	[2.829]	[2.622]	[2.450]	[.373]			
GRAY	0.74-0.79	51.54	46.28	41.91	7.44	68	2-750913-1	
	[.029-.031]	[2.029]	[1.822]	[1.650]	[.293]			
BLACK	0.81-0.91	40.11	34.85	30.48	7.44	50	2-750913-0	
	[.032-.036]	[1.579]	[1.372]	[1.200]	[.293]			
GRAY	0.74-0.79	71.86	66.60	62.23	9.47	100	1-750913-9	
	[0.29-0.31]	[2.829]	[2.622]	[2.450]	[.373]			
GRAY	0.74-0.79	51.54	46.28	41.91	7.44	68	1-750913-7	
	[.029-.031]	[2.029]	[1.822]	[1.650]	[.293]			
GRAY	0.74-0.79	40.11	34.85	30.48	7.44	50	1-750913-5	
	[0.29-0.31]	[1.579]	[1.372]	[1.200]	[.293]			
GRAY	0.74-0.79	33.76	28.50	24.13	7.44	40	1-750913-4	
	[.029-.031]	[1.329]	[1.122]	[.950]	[.293]			
GRAY	0.74-0.79	24.87	19.61	15.24	7.44	26	1-750913-2	
	[0.29-0.31]	[.979]	[.772]	[.600]	[.293]			
BLACK	0.81-0.91	71.86	66.60	62.23	9.47	100	750913-9	
	[.032-.036]	[2.829]	[2.622]	[2.450]	[.373]			
BLACK	0.81-0.91	51.54	46.28	41.91	7.44	68	750913-7	
	[.032-.036]	[2.029]	[1.822]	[1.650]	[.293]			
BLACK	0.81-0.91	40.11	34.85	30.48	7.44	50	750913-5	
	[.032-.036]	[1.579]	[1.372]	[1.200]	[.293]			
BLACK	0.81-0.91	33.76	28.50	24.13	7.44	40	750913-4	
	[.032-.036]	[1.329]	[1.122]	[.950]	[.293]			
BLACK	0.81-0.91	24.87	19.61	15.24	7.44	26	750913-2	
	[.032-.036]	[.979]	[.772]	[.600]	[.293]			

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 11-13-11 BY: S-1

REVISED PER EDD-11-004835

TE Connectivity

PLUG KIT, UNASSEMBLED, DISCRETE WIRE TERMINATING COVER, 1000 SERIES, AMPLINE.

108-1228

114-40029

100779

750913

CONTACTS: SEE TABLE CUSTOMER DRAWING