MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
YZ-7RW8221555516T

CATALOG LISTING YZ-7RW8221555516T PAGE 1 OF 1
REPLACES X71643-YZ
RELEASE NO. PR-10650-T
DRAWING NUMBER M
ISSUE 6
CHECK

REVISIONS

A	C067209	J A P 2 MAY 90
B	CO-69351-D	JWB 18 JUL 91
C	CO-77588	K D R 29 MAR 94
D	C093346	D L T 17 AUG 98
E	0000763	C S L 2 JUL 03

CHECK | CEB 26 OCT 81 | CHECK | CHECK | EF 19 OCT 81 | DRAWN RASTER | FO-52848-A

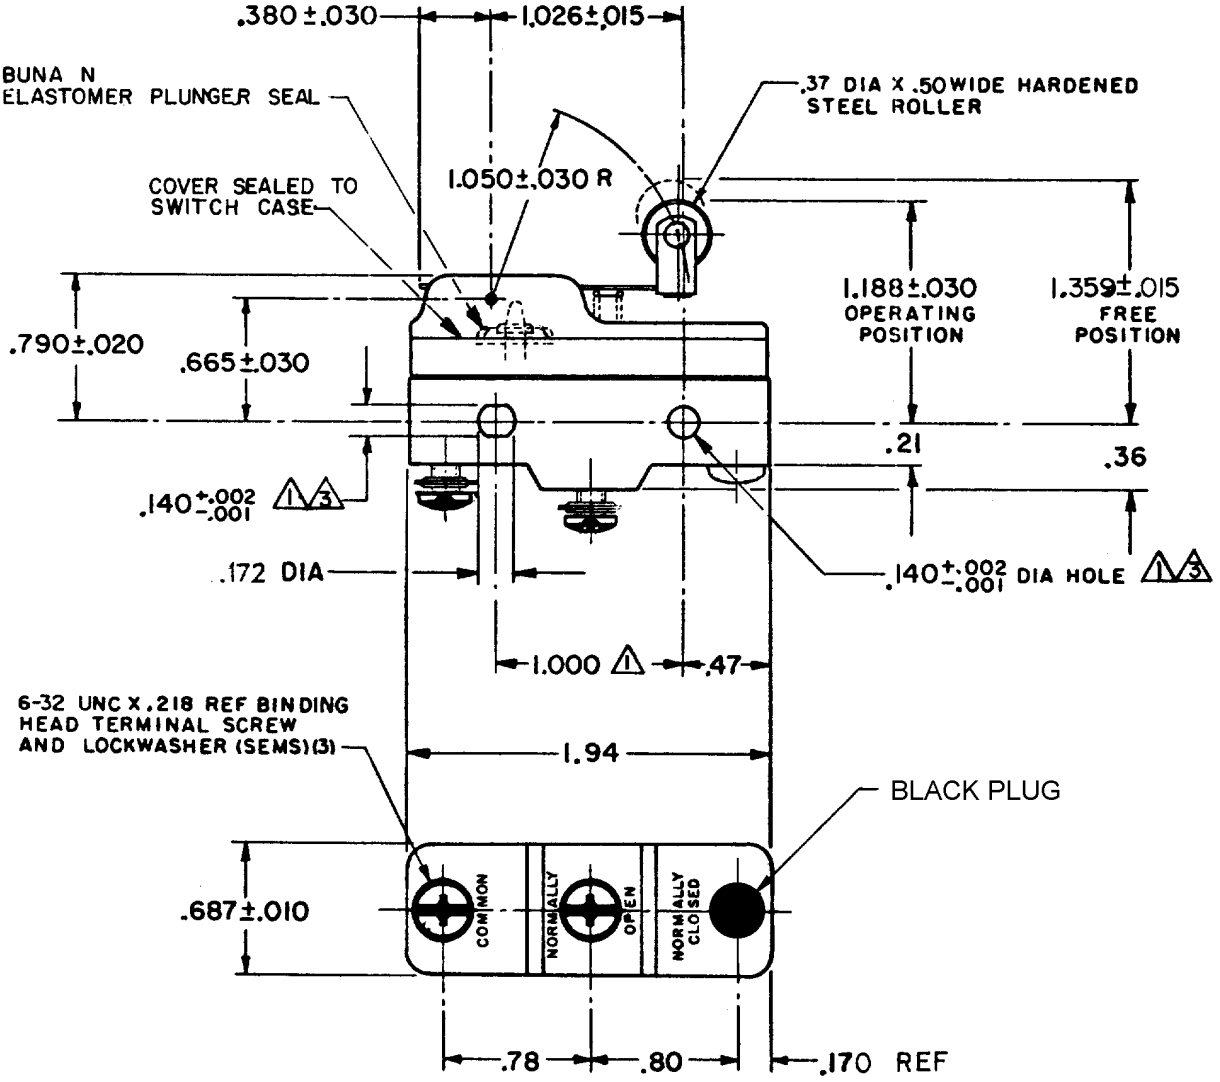

NOTES
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2 3. SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
SLIGHT COUNTERBORE PERMISSIBLE (EITHER SIDE)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE - - - - - 7 OZ MAX
RELEASE FORCE - - - - - - 1 1/2 MIN
DIFFERENTIAL TRAVEL - - - - .020 - .050
OVERTRAVEL - - - - - - - - .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

L9
10A 125, 250 OR 480 VAC
1/2 A 125 VDC, 1/4 A 250 VDC
L288

SCALE FULL
DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.5/.020
TWO PLACES	X.XX	0.15/.006	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

DESIGN UNITS: SI METRIC ☐ US CUSTOMARY ■

WEIGHT .079 LB

Downloaded from Elcodis.com electronic components distributor