

Series 625 DIP Headers with Screw Machine Contacts

FEATURES:

· Aries offers a full line of DIP headers, available with either screw machine or coined contacts in a variety of styles. Consult Data Sheet No. 12032 for coined contacts.


SPECIFICATIONS:

- Body material is black UL 94-V0 Glass-filled 4/6 Nylon.
- Fork and Post style contacts are Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-00.
- · Solder cup style contact is Phosphor Bronze Alloy per 544 UNS C54400 ASTM-B139-01.
- Contact plating is either 10 μ [.25μm] min. Gold per MIL-G-45204 or 200μ [5.08μm] min. 93/7 Tin/Lead per ASTM B545 or 200μ [5.08μm] min. Tin per ASTM B545 Type 1 over 100μ [2.54µm] min. Nickel per SAE-AMS-QQ-N-290.
- Contact current rating=2 Amps (3 Amps for Pin Style 5).
- Operating temperature= -67°F to 221°F [-55°C to 105°C]

Tin & Tin/Lead plating = -67°F to 257°F [-55°C to 125°C] Gold plating.


 Fork contact accepts up to .035 [.89] diameter leads. **MOUNTING CONSIDERATIONS:**


Suggested PCB hole size=.028 ± .002 [.71 ± .05] dia.

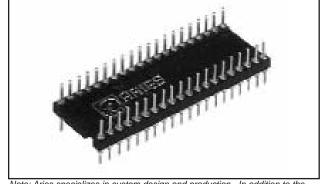


Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION



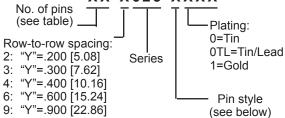

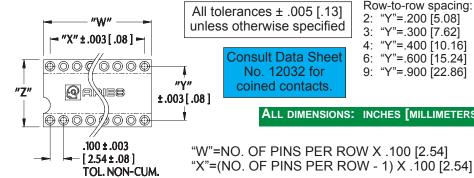



Consult Data Sheet No. 12032 for coined contacts.

"W"=NO. OF PINS PER ROW X .100 [2.54]

ALL DIMENSIONS: INCHES [MILLIMETERS]

Centers "Y"	Dim. "Z"	Body Style	Available Sizes
.200 [5.08]	.300 [7.62]	A*	2 thru 10
.300 [7.62]	.400 [10.16]	С	2 thru 20
		В	22 thru 40
.400 [10.16]	.500 [12.70]	С	2 thru 22
.600 [15.24]	.700 [17.78]	С	2 thru 40
		В	42 thru 48
.900 [22.86]	1.000 [25.40]	В	2 thru 64





.125 [3.18]

.134 [3.40]

.040 [1.02]

100 .100 [2.54] Ø.018±.002 Ø.025 ±.002 .035 [.89] Ø.038 ±.002 [.64±.05] [.64±.05] .072 [1.83] .035[.89] [.97 ±.05] .075 .072 [1.83] .150 [1.91] .013 [.33] .166 .232 .166 [3.81] [5.89] .218 .218 .157 **STAND-OFF** [4.216] <u>1</u>_ [4.216] [5.54] [5.54] .125 [3.99] TYP. .510 [3.18] [12.95] .156 156 .156 .156 .025 ± .002 Ø.018 ±.002 Ø.018 ±.002 $\emptyset.018 \pm .002$ $\emptyset.018 \pm .002$ [3.96] [3.96] [3.96] [.64±.05] [.46 ± .05] [.46 ±.05] $[.46 \pm .05]$ [.46 ±.05] **SQUARE** (3) SOLDER CUP 1 FORK STYLE (2) POST STYLE (5) FORK WIRE WRAP (7) POST STYLE



*Note: Reduced tail length for Body Style A

http://www.arieselec.com • info@arieselec.com

Bristol, PA USA TEL: (215) 781-9956 FAX: (215) 781-9845





12035 REV. E

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED