THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,2001.
© COPYRIGHT 2001 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| J | — |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | A | REVISED (FJ00-1882-01) | 24AUG'01 | C.J | H.M |

AS SHOWN:-1(本図)

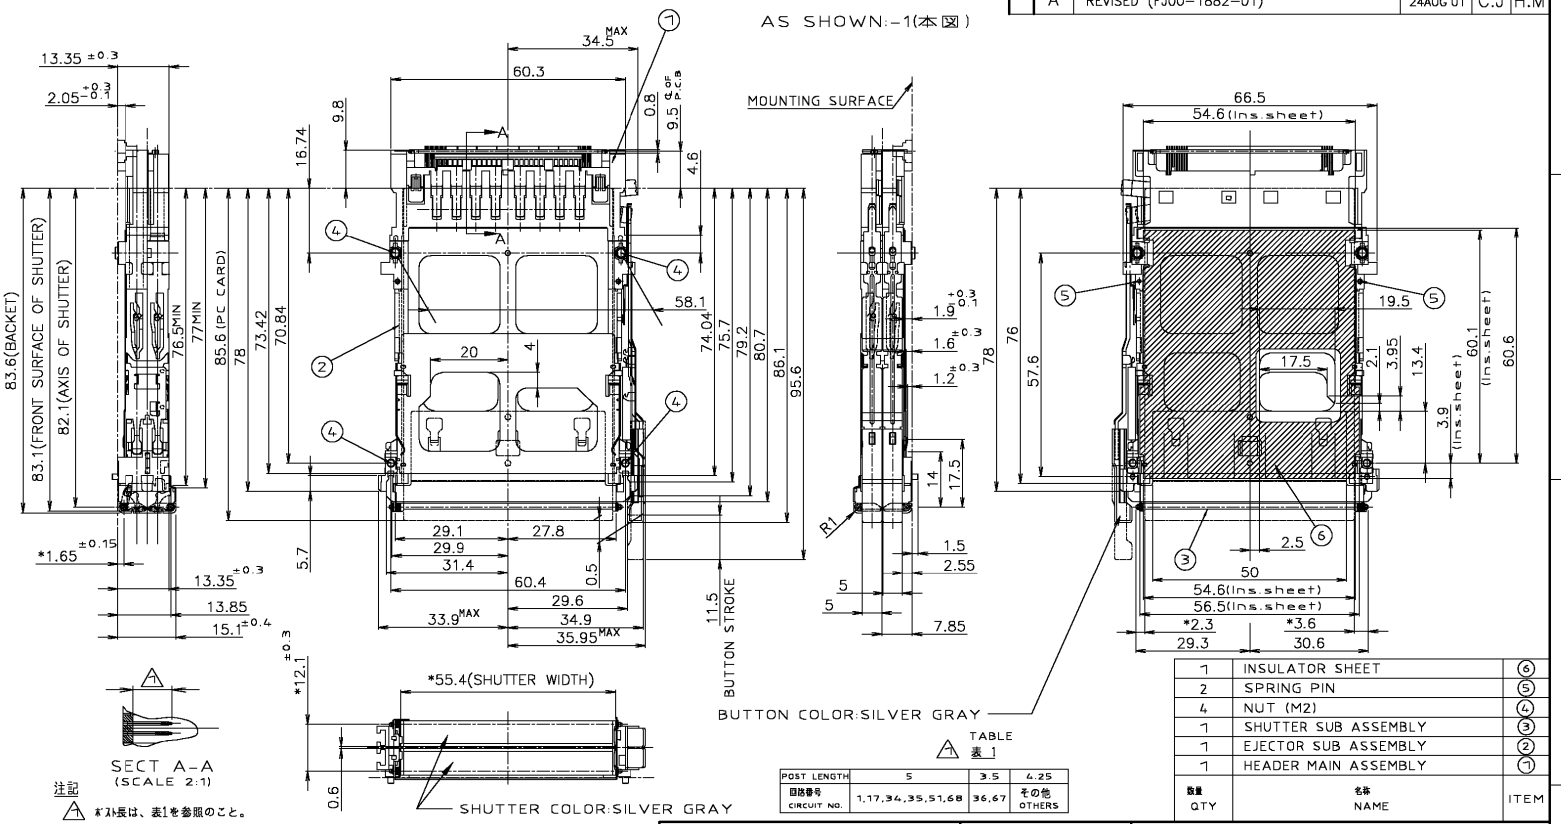


SECT A-A
(SCALE 2:1)

TABLE
表 1

| POST LENGTH | 5 | 3.5 | 4.25 |
|---|---|---|---|
| 回路番号 CIRCUIT NO. | 1,17,34,35,51,68 | 36,67 | その他 OTHERS |

| ITEM | NAME 名称 | QTY 数量 |
|---|---|---|
| 7 | INSULATOR SHEET | 6 |
| 2 | SPRING PIN | 5 |
| 4 | NUT (M2) | 4 |
| 7 | SHUTTER SUB ASSEMBLY | 3 |
| 7 | EJECTOR SUB ASSEMBLY | 2 |
| 7 | HEADER MAIN ASSEMBLY | 1 |

注記
1. ポスト長は、表1を参照のこと。
2. 推奨ネジ締め付けﾄﾙｸ: 0.15N·m(1.5kg·cm)から0.2N·m(2kg·cm)
3. 適応PCｶｰﾄﾞ: PCMCIA準拠のPCｶｰﾄﾞ
4. 推奨取り付けﾈｼﾞ: ﾒｰﾄﾙ並目ﾈｼﾞ M2 P=0.4, L=12mm

NOTE
1. REFER TO TABLE 1 FOR POST CONTACT LENGTH.
2. RECOMMENDED TIGHTENING TORUQUE :FROM 0.15N·m(1.5kg·cm) TO 0.2N·m(2kg·cm)
3. APPLIED CARD: PCMCIA ATTRIBUTE PC CARD.
4. RECOMMENDED MACHINE SCREW: METRIC COARSE SCREW TREAD M2 P=0.4, L=12mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.5
1 PLC ±0.5
2 PLC ±0.5
3 PLC ±—
4 PLC ±—
ANGLES ±—

MATERIAL

FINISH

| | | |
|---|---|---|
| DWN | K.YAMAGUCHI | 2APR'01 |
| CHK | S.WATANABE | 9APR'01 |
| APVD | H.MURAMATSU | 10APR'01 |
| PRODUCT SPEC | 108-5590 | |
| APPLICATION SPEC | — | |
| WEIGHT | 35gr | |

AMP Tyco Electronics Corporation Kawasaki, Japan

NAME
CARD BUS CONNECTOR
DOUBLE SLOT TOP MOUNT PUSH-PUSH TYPE

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C-1473670 | — |

CUSTOMER DRAWING

SCALE 1:1 SHEET 1 OF 2 REV A

AMP 1470-19 REV 31MAR2000

08AUG2001 11:22am FJ033475 S:\AMP-KawasakiEC\CC_CE\EN22_CadData\AutoCAD\fj033475_S-WATANABE\AR-1\C-1473670.dwg

Downloaded from Elcodis.com electronic components distributor

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,2001.
© COPYRIGHT 2001 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC J | DIST —

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|

推奨取り付け寸法（部品搭載面）
APPLICABLE P.C.BOARD LAYOUT (VIEW FROM CONN. MOUNTING SIDE)

0.6mm PITCH CARD EDGE CONNECTOR FOR THIS CARDBUS PRODUCTS

| Parts Number | Description |
|---|---|
| 1123215-1 | HARD TRAY ASSY |
| 1376045-1 | ON TAPING(EMBOSS) |

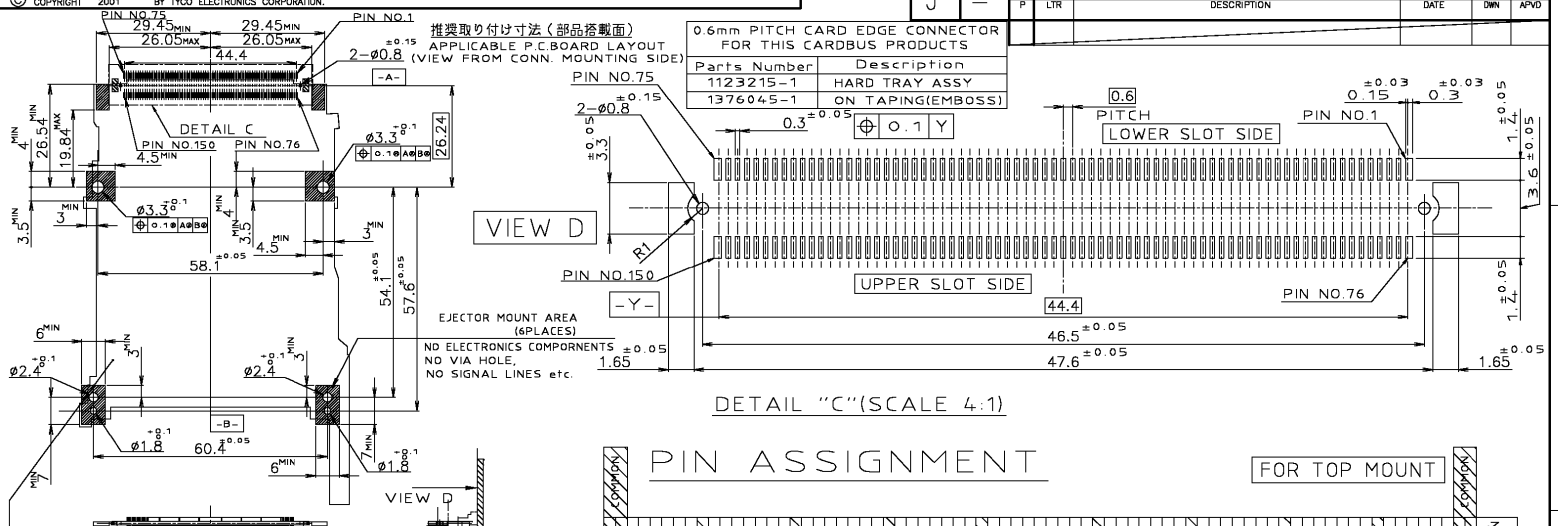


DETAIL "C"(SCALE 4:1)

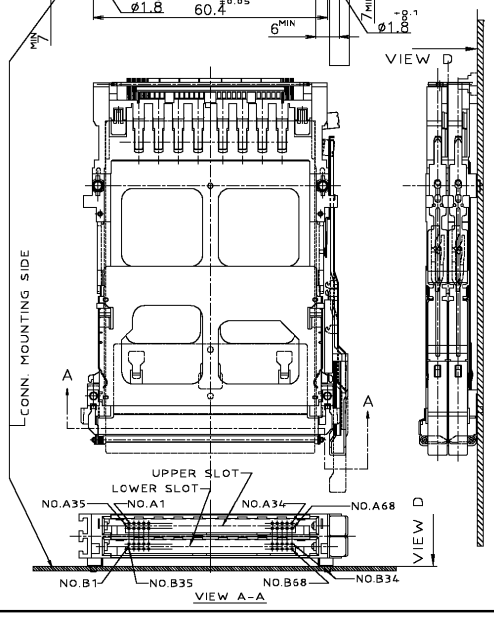


## PIN ASSIGNMENT

FOR TOP MOUNT

| | PIN NO. CARD BUS | PIN NO. RECEPT CONN 150P |
|---|---|---|
| COMMON | | |
| LOWER SLOT | B35 | 75 |
| | A1 | 74 |
| | B36 | 73 |
| | A2 | 72 |
| | B37 | 71 |
| | A3 | 70 |
| | B38 | 69 |
| | B4 | 68 |
| | A4 | 67 |
| | B39 | 66 |
| | B5 | 65 |
| | B40 | 64 |
| | B6 | 63 |
| | B41 | 62 |
| | B7 | 61 |
| | A5 | 60 |
| | B42 | 59 |
| | B8 | 58 |
| | B43 | 57 |
| | B9 | 56 |
| | B44 | 55 |
| | A10 | 54 |
| | B45 | 53 |
| | B11 | 52 |
| | A7 | 51 |
| | B46 | 50 |
| | B12 | 49 |
| | A11 | 48 |
| | B13 | 47 |
| | B48 | 46 |
| | B14 | 45 |
| | A9 | 44 |
| | B15 | 43 |
| | A8 | 42 |
| | B50 | 41 |
| | B16 | 40 |
| | B51 B17 | 39 |
| | NONE | 38 |
| | B52 B18 | 37 |
| | B19 | 36 |
| | B53 | 35 |
| | B20 | 34 |
| | B7 | 33 |
| | B54 | 32 |
| | B21 | 31 |
| | B55 | 30 |
| | B22 | 29 |
| | B56 | 28 |
| | B23 | 27 |
| | B57 | 26 |
| | A12 | 25 |
| | B24 | 24 |
| | B58 | 23 |
| | B25 | 22 |
| | B59 | 21 |
| | B26 | 20 |
| | B60 | 19 |
| | B27 | 18 |
| | B7 | 17 |
| | B61 | 16 |
| | B28 | 15 |
| | B62 | 14 |
| | B63 | 13 |
| | B30 | 12 |
| | B64 | 11 |
| | B7 | 10 |
| | B31 | 9 |
| | B65 | 8 |
| | B32 | 7 |
| | B66 | 6 |
| | B33 | 5 |
| | B67 | 4 |
| | B34 | 3 |
| | B68 | 2 |
| COMMON | | 1 |

| | PIN NO. CARD BUS | PIN NO. RECEPT CONN 150P |
|---|---|---|
| UPPER SLOT | A35 | 150 |
| | A1 | 149 |
| | A36 | 148 |
| | A2 | 147 |
| | A37 | 146 |
| | A3 | 145 |
| | A38 | 144 |
| | A4 | 143 |
| | B35 | 142 |
| | A39 | 141 |
| | A40 | 140 |
| | A6 | 139 |
| | A41 | 138 |
| | A7 | 137 |
| | B37 | 136 |
| | A42 | 135 |
| | A8 | 134 |
| | A43 | 133 |
| | A9 | 132 |
| | A44 | 131 |
| | A10 | 130 |
| | A45 | 129 |
| | A11 | 128 |
| | G7 | 127 |
| | A46 | 126 |
| | A12 | 125 |
| | A47 | 124 |
| | A13 | 123 |
| | A48 | 122 |
| | A14 | 121 |
| | A49 | 120 |
| | A15 | 119 |
| | A50 | 118 |
| | A16 | 117 |
| | A51 A17 | 116 |
| | NONE | 115 |
| | A52 A18 | 114 |
| | A19 | 113 |
| | A53 | 112 |
| | A20 | 111 |
| | G7 | 110 |
| | A54 | 109 |
| | A21 | 108 |
| | A55 | 107 |
| | A22 | 106 |
| | A56 | 105 |
| | A23 | 104 |
| | A57 | 103 |
| | A24 | 102 |
| | G7 | 101 |
| | A58 | 100 |
| | A25 | 99 |
| | A59 | 98 |
| | A26 | 97 |
| | A60 | 96 |
| | A27 | 95 |
| | G7 | 94 |
| | A61 | 93 |
| | A28 | 92 |
| | A62 | 91 |
| | A29 | 90 |
| | A63 | 89 |
| | A30 | 88 |
| | A64 | 87 |
| | G7 | 86 |
| | A31 | 85 |
| | A65 | 84 |
| | A32 | 83 |
| | A66 | 82 |
| | A33 | 81 |
| | A67 | 80 |
| | A34 | 79 |
| | A68 | 78 |
| COMMON | | 77 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

| | |
|---|---|
| 0 PLC | ± 0.5 |
| 1 PLC | ± 0.5 |
| 2 PLC | ± 0.5 |
| 3 PLC | ± — |
| 4 PLC | ± — |
| ANGLES | ± |

MATERIAL | FINISH

DWN | CHK | APVD | PRODUCT SPEC | APPLICATION SPEC — | WEIGHT

AMP Tyco Electronics Corporation Kawasaki, Japan

NAME: CARD BUS CONNECTOR DOUBLE SLOT TOP MOUNT PUSH-PUSH TYPE

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C-1473670 | — |

CUSTOMER DRAWING | SCALE 1:1 | SHEET 2 OF 2 | REV A

AMP 1470-19 REV 31MAR2000

11:22am FJ033475 S:\AMP-KawasakiEC\CC_CE\EN22_CadData\AutoCAD\fj033475_S-WATANABE\AR-1\C-1473670.dwg

Downloaded from Elcodis.com electronic components distributor