



AC Inlet

161-0711-2


KOBI CONN

AC Inlet

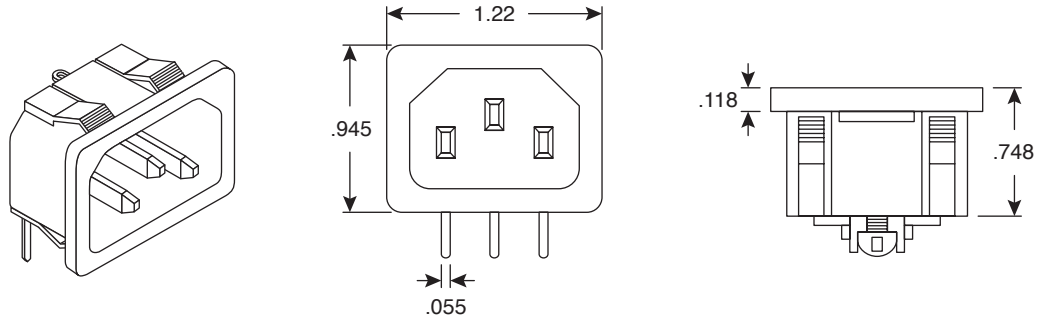

Thickness: .031~.047(X=.799)

Panel Cut-Out



PCB Hole Layout

.051~.079(X=.807)

Dimensions: In.

SPECIFICATIONS	
Type:	PC mount AC power inlet
Housing:	thermoplastic, nylon 66
Terminal:	tin plated copper alloy
Rating:	250VAC 15A
Insulation resistance:	>100M Ω @ 500VDC
Dielectric strength (between terminals):	>2000VAC for 1 minute @ .5mA
Operating temperature:	-25°C to +85°C max.
Solderability:	temperature of solder bath -235°C, dipping time 3 \pm .5 seconds
Color:	black

Date Last Revised: 10-19-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC- 300458

161-0711-2