




13 12 11 10 9 8 7 6 5 4 3 2 1



- NOTES:
1. MATERIAL: NYLON, UL94V-0, COLOR: WHITE
 2. FINISH:
 - (102) - OVERALL TIN: .000200/(0.00506) MIN., OVERALL COPPER UNDERPLATE: .000100/(0.00254) MIN.
 - (501) - OVERALL GOLD: .000020/(0.00051) MIN., OVERALL NICKEL UNDERPLATE: .000030/(0.00076) MIN.
 - (503) - OVERALL GOLD: .000030/(0.00076) MIN., OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.
 3. PARTS CONFORM TO PRODUCT SPECIFICATION PS-10-07.
 4. PACKAGING INFORMATION: SEE LEGEND.
 5. PARTS ARE STACKABLE END TO END ON .100/(2.54) CENTERS.
 6. PIN PUSH OUT FORCE: 2 LBS. MIN.
 7. CIRCUIT ONE DESIGNATION IS USED TO DEFINE VOID LOCATION. CIRCUIT ONE MAY OR MAY NOT LINE UP WITH CIRCUIT ONE ON THE MATING HOUSING.
 8. PARTS CONFORM TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

| | | | | | |
|--------------|----------------------------------|-------------------------------|----|----------------------------------|-------------------------------|
| 28 | 2.800 / 2.780 (71.12 / 70.61) | 2.700 ± .010 (68.58 ± .25) | 23 | 2.300 / 2.282 (58.42 / 57.96) | 2.200 ± .009 (55.88 ± .23) |
| 27 | 2.700 / 2.680 (68.58 / 68.07) | 2.600 ± .010 (66.04 ± .25) | 22 | 2.200 / 2.182 (55.88 / 55.42) | 2.100 ± .009 (53.34 ± .23) |
| 26 | 2.600 / 2.580 (66.04 / 65.53) | 2.500 ± .010 (63.50 ± .25) | 21 | 2.100 / 2.082 (53.34 / 52.88) | 2.000 ± .009 (50.80 ± .23) |
| 25 | 2.500 / 2.480 (63.50 / 62.99) | 2.400 ± .010 (60.96 ± .25) | 20 | 2.000 / 1.982 (50.80 / 50.34) | 1.900 ± .009 (48.26 ± .23) |
| 24 | 2.400 / 2.380 (60.96 / 60.45) | 2.300 ± .010 (58.42 ± .25) | 19 | 1.900 / 1.882 (48.26 / 47.80) | 1.800 ± .009 (45.72 ± .23) |
| NO. OF CKTS. | DIM. A | DIM. B | 18 | 1.800 / 1.784 (45.72 / 45.31) | 1.700 ± .008 (43.18 ± .20) |
| | | | 17 | 1.700 / 1.684 (43.18 / 42.77) | 1.600 ± .008 (40.64 ± .20) |
| | | | 16 | 1.600 / 1.584 (40.64 / 40.23) | 1.500 ± .008 (38.10 ± .20) |
| | | | 15 | 1.500 / 1.484 (38.10 / 37.69) | 1.400 ± .008 (35.56 ± .20) |
| | | | 14 | 1.400 / 1.386 (35.56 / 35.20) | 1.300 ± .007 (33.02 ± .18) |
| | | | 13 | 1.300 / 1.286 (33.02 / 32.66) | 1.200 ± .007 (30.48 ± .18) |
| | | | 12 | 1.200 / 1.186 (30.48 / 30.12) | 1.100 ± .007 (27.94 ± .18) |
| | | | 11 | 1.100 / 1.086 (27.94 / 27.58) | 1.000 ± .007 (25.40 ± .18) |
| | | | 10 | 1.000 / .986 (25.40 / 25.04) | .900 ± .006 (22.86 ± .15) |
| | | | 9 | .900 / .886 (22.86 / 22.50) | .800 ± .006 (20.32 ± .15) |
| | | | 8 | .800 / .786 (20.32 / 19.96) | .700 ± .006 (17.78 ± .15) |
| | | | 7 | .700 / .686 (17.78 / 17.42) | .600 ± .005 (15.24 ± .13) |
| | | | 6 | .600 / .586 (15.24 / 14.88) | .500 ± .005 (12.70 ± .13) |
| | | | 5 | .500 / .488 (12.70 / 12.40) | .400 ± .005 (10.16 ± .13) |
| | | | 4 | .400 / .388 (10.16 / 9.86) | .300 ± .005 (7.62 ± .13) |
| | | | 3 | .300 / .288 (7.62 / 7.32) | .200 ± .004 (5.08 ± .10) |
| | | | 2 | .200 / .188 (5.08 / 4.78) | .100 ± .004 (2.54 ± .10) |
| NO. OF CKTS. | DIM. A | DIM. B | | | |

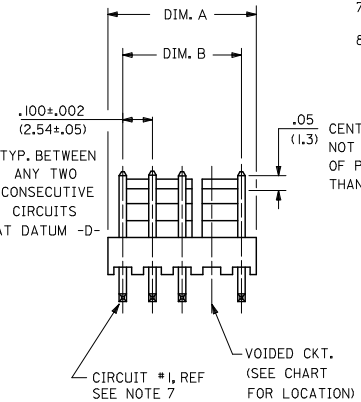

A-7832-N****


VOID CODE
BLANK=NO VOIDS
NO.=CKT. NO. VOIDED
MULT. VOIDS START WITH 51

NO. OF CKTS.

VERSION
LETTER CHANGES WHEN PIN NO. OR PRESS DIM. CHANGES

| SECONDARY | | OPERATIONS |
|-----------|--------------------|-----------------|
| CODE | PACKAGE | TUBE LENGTH |
| BLANK | BULK PK-7478-001 | N/A |
| A | TUBE: PK-44743-001 | 22.047/(560.00) |

PLATING: SEE NOTE 2.
FOR ADDITIONAL INFORMATION SEE SDES-88.



| | | | | | | | | |
|---|-------------------------------|---------------------------------------|----------------------|---|-------|---|------------------------|--|
| ADD GROOVE EC NO. UCP2009-0785 2008/12/29 DRINKER UPPER 2009/01/30 CHKDSSUSEK 2009/01/30 APPROVSMITH | QUALITY SYMBOLS ▽=0 ▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE | SCALE | DESIGN UNITS | THIRD ANGLE PROJECTION | |
| | | 4 PLACES ±.010 ±.010 | 3 PLACES ±.010 ±.010 | IN/MM | --- | INCH | | |
| | | 2 PLACES ±0.25 ±.015 | 1 PLACE ±0.36 ±.015 | | | | | |
| | | ANGULAR ±1/2° | | | | | | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | SEE CHART | | DRAWN BY DATE | | TITLE | | |
| | | | | CHECKED BY DATE | | FRICITION LOCK HEADER ASY .100 CL. BENT SQ. PINS 7832 SERIES DWG. W/VOIDS | | |
| | | | | APPROVED BY DATE | | MOLEX INCORPORATED | | |
| | | | | MATERIAL NO. | | DOCUMENT NO. | | |
| | | | | 1990/02/26 | | SDA-7832 | | |
| | | | | SHEET NO. | | 1 OF 3 | | |
| | | | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | |

| | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---------------------------------------|-----------------|-----------------------|----------------|---|--|--|------------------------|---------------------------------------|--------|-----------------------|--------|-----------|-------------------|------------------------|-------------|----|------|----------|------|-------|--|--|-----|--|---------------|------|-------|------------|--------------------|--|--|--|--|---------------|------|------------|------|---|--|--|--|--|---------------|------|-------|------------|---|--|--|--|--|--------------|------|-------------|------|--|--|--|--|--|---------------|------|------|------------|--|--|--|--|--|--|--|--|--|--|--|
| J | ENG. NO. | PIN NO. | DIM. L | DIM. X | DIM. Z | DIM. Y | DIM. W | DIM. R | ENG. NO. | PIN NO. | DIM. L | DIM. X | DIM. Z | DIM. Y | DIM. W | DIM. T | J | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | A-7832-NA102 | 2766-4(102) | (18.69) .736 | (6.60) .260 | (3.58) .141 | (3.05) .120 | 90° | (1.17) .046 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | A-7832-NB102 | 2766-72(102) | (19.69) .775 | (7.62) .300 | (3.56) .140 | (3.05) .120 | 90° | (1.17) .046 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I | A-7832-NA501 | 2766-4(1501) | (18.69) .736 | (6.60) .260 | (3.58) .141 | (3.05) .120 | 90° | (1.17) .046 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | A-7832-NA503 | 2766-4(1503) | (18.69) .736 | (6.60) .260 | (3.58) .141 | (3.05) .120 | 90° | (1.17) .046 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| G | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | <table border="1"> <tr> <td rowspan="2">UPDATE TITLE BLOCK EC NO. UCP2005-1920 DRAWN BY 2005/03/16 CHKD BY 2005/03/16 APPR BY 2005/03/16 M2</td> <td>QUALITY SYMBOLS</td> <td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> <td colspan="2">DIMENSION STYLE IN/MM</td> <td>SCALE ---</td> <td>DESIGN UNITS INCH</td> <td>THIRD ANGLE PROJECTION</td> </tr> <tr> <td>DESCRIPTION</td> <td>mm</td> <td>INCH</td> <td>DRAWN BY</td> <td>DATE</td> <td>TITLE</td> <td colspan="2">FRICION LOCK HEADER ASY .100 CL. BENT SQ. PINS 7832 SERIES DWG W/VOIDS</td> </tr> <tr> <td>REV</td> <td></td> <td>4 PLACES ±---</td> <td>±---</td> <td>GUZIK</td> <td>1990/02/26</td> <td colspan="3">MOLEX INCORPORATED</td> </tr> <tr> <td></td> <td></td> <td>3 PLACES ±---</td> <td>±---</td> <td>CHECKED BY</td> <td>DATE</td> <td colspan="3">MATERIAL NO. SEE CHART DOCUMENT NO. SDA-7832 SHEET NO. 2 OF 3</td> </tr> <tr> <td></td> <td></td> <td>2 PLACES ±---</td> <td>±---</td> <td>PATEL</td> <td>1990/02/26</td> <td colspan="3">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td></td> <td></td> <td>1 PLACE ±---</td> <td>±---</td> <td>APPROVED BY</td> <td>DATE</td> <td colspan="3"></td> </tr> <tr> <td></td> <td></td> <td>ANGULAR ±---°</td> <td>±---</td> <td>LENZ</td> <td>1990/02/26</td> <td colspan="3"></td> </tr> </table> | | | | | | | UPDATE TITLE BLOCK EC NO. UCP2005-1920 DRAWN BY 2005/03/16 CHKD BY 2005/03/16 APPR BY 2005/03/16 M2 | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE IN/MM | | SCALE --- | DESIGN UNITS INCH | THIRD ANGLE PROJECTION | DESCRIPTION | mm | INCH | DRAWN BY | DATE | TITLE | FRICION LOCK HEADER ASY .100 CL. BENT SQ. PINS 7832 SERIES DWG W/VOIDS | | REV | | 4 PLACES ±--- | ±--- | GUZIK | 1990/02/26 | MOLEX INCORPORATED | | | | | 3 PLACES ±--- | ±--- | CHECKED BY | DATE | MATERIAL NO. SEE CHART DOCUMENT NO. SDA-7832 SHEET NO. 2 OF 3 | | | | | 2 PLACES ±--- | ±--- | PATEL | 1990/02/26 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | 1 PLACE ±--- | ±--- | APPROVED BY | DATE | | | | | | ANGULAR ±---° | ±--- | LENZ | 1990/02/26 | | | | | | | | | | | |
| UPDATE TITLE BLOCK EC NO. UCP2005-1920 DRAWN BY 2005/03/16 CHKD BY 2005/03/16 APPR BY 2005/03/16 M2 | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE IN/MM | | SCALE --- | DESIGN UNITS INCH | | THIRD ANGLE PROJECTION | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | DESCRIPTION | mm | INCH | DRAWN BY | DATE | TITLE | FRICION LOCK HEADER ASY .100 CL. BENT SQ. PINS 7832 SERIES DWG W/VOIDS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| REV | | 4 PLACES ±--- | ±--- | GUZIK | 1990/02/26 | MOLEX INCORPORATED | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 3 PLACES ±--- | ±--- | CHECKED BY | DATE | MATERIAL NO. SEE CHART DOCUMENT NO. SDA-7832 SHEET NO. 2 OF 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2 PLACES ±--- | ±--- | PATEL | 1990/02/26 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 1 PLACE ±--- | ±--- | APPROVED BY | DATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ANGULAR ±---° | ±--- | LENZ | 1990/02/26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | tb_frame_C_P_ME_T Rev. D 2004/04/02 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | | |
|---|----------------|----------------------|-------------------------|----------------|----------------------|-----------|----------------|----------------------|-----------|----------------|----------------------|-----------|------------|----------------------|-----------|---|
| | A-7832-NA102-* | | | A-7832-NB102-* | | | A-7832-NA501-* | | | A-7832-NA503-* | | | | | | |
| J | PART NO. | ENG. NO(SUFFIX ONLY) | VOID CKT. | PART NO. | ENG. NO(SUFFIX ONLY) | VOID CKT. | PART NO. | ENG. NO(SUFFIX ONLY) | VOID CKT. | PART NO. | ENG. NO(SUFFIX ONLY) | VOID CKT. | PART NO. | ENG. NO(SUFFIX ONLY) | VOID CKT. | J |
| | 22-05-8059 | A-7832-5A102-2 | 2 | 22-05-8109 | A-7832-10B102-6 | 6 | 22-19-2070 | A-7832-7A501-6 | 6 | 22-19-2098 | A-7832-9A503-3 | 3 | 22-19-2098 | A-7832-9A503-3 | 3 | |
| | 22-05-8199 | A-7832-19A102-14 | 14 | 22-05-8078 | A-7832-7B102-4 | 4 | 22-19-2060 | A-7832-6A501-3 | 3 | 22-19-2099 | A-7832-9A503-4 | 4 | 22-19-2048 | A-7832-4A503-3 | 3 | |
| | 22-05-8069 | A-7832-6A102-2 | 2 | | | | 22-19-2090 | A-7832-9A501-6 | 6 | | | | | | | |
| | 22-05-8076 | A-7832-7A102-4 | 4 | | | | | | | | | | | | | |
| | 22-05-8077 | A-7832-7A102-5 | 5 | | | | | | | | | | | | | |
| I | 22-05-8068 | A-7832-6A102-5 | 5 | | | | | | | | | | | | | I |
| | 22-05-8047 | A-7832-4A102-2 | 2 | | | | | | | | | | | | | |
| | 22-05-8079 | A-7832-7A102-3 | 3 | | | | | | | | | | | | | |
| | 22-05-8116 | A-7832-11A102-6 | 6 | | | | | | | | | | | | | |
| | | A-7832-5A102-4 | 4 | | | | | | | | | | | | | |
| | 22-05-8253 | A-7832-25A102-1 | 1 | | | | | | | | | | | | | |
| | 22-05-8129 | A-7832-12A102-10 | 10 | | | | | | | | | | | | | |
| H | 22-05-8159 | A-7832-15A102-14 | 14 | | | | | | | | | | | | | H |
| | 22-05-8128 | A-7832-12A102-4 | 4 | | | | | | | | | | | | | |
| | 22-05-8049 | A-7832-4A102-3 | 3 | | | | | | | | | | | | | |
| | 22-05-8086 | A-7832-8A102-4 | 4 | | | | | | | | | | | | | |
| | 22-05-8113 | A-7832-11A102-5 | 1,5,9 | | | | | | | | | | | | | |
| | 22-05-8162 | A-7832-16A102-5 | 1,8 | | | | | | | | | | | | | |
| G | 22-05-8087 | A-7832-8A102-2 | 2 | | | | | | | | | | | | | G |
| | 22-05-8088 | A-7832-8A102-6 | 6 | | | | | | | | | | | | | |
| | 22-05-8089 | A-7832-8A102-7 | 7 | | | | | | | | | | | | | |
| | 22-05-8104 | A-7832-10A102-2 | 2 | | | | | | | | | | | | | |
| | 22-05-8105 | A-7832-10A102-9 | 9 | | | | | | | | | | | | | |
| | 22-05-8084 | A-7832-8A102-3 | 3 | | | | | | | | | | | | | |
| F | 22-05-3277 | A-7832-27A102-5 | 3,7,9,11,14 16,21,23 | | | | | | | | | | | | | F |
| | 22-05-8143 | A-7832-14A102-5 | 2,3,5,6 | | | | | | | | | | | | | |

| COLUMN NO. 1 | CON'T. IN COLUMN NO. | SHEET NO. | COLUMN NO. 2 | CON'T. IN COLUMN NO. | SHEET NO. | COLUMN NO. 3 | CON'T. IN COLUMN NO. | SHEET NO. | COLUMN NO. 4 | CON'T. IN COLUMN NO. | SHEET NO. |
|--------------|----------------------|-----------|--------------|----------------------|-----------|--------------|----------------------|-----------|--------------|----------------------|-----------|
|--------------|----------------------|-----------|--------------|----------------------|-----------|--------------|----------------------|-----------|--------------|----------------------|-----------|

| | | | | | | | | | | | | | | | | | | | | |
|---|--|---|--|-------------------------|------|--|------|------|----------|------|------|----------|------|------|---------|------|------|---|---|---|
| <p>UPDATE TITLE BLOCK</p> <p>EC NO. UCP2005-1920 DRAWN BY 2005/03/16 CHK/CHKELHAG 2005/03/16 APPR/ESMITH 2005/03/16</p> | <p>QUALITY SYMBOLS</p> <p>☐=0 ☒=0</p> | <p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p> <table border="1"> <tr><td></td><td>mm</td><td>INCH</td></tr> <tr><td>4 PLACES</td><td>±---</td><td>±---</td></tr> <tr><td>3 PLACES</td><td>±---</td><td>±---</td></tr> <tr><td>2 PLACES</td><td>±---</td><td>±---</td></tr> <tr><td>1 PLACE</td><td>±---</td><td>±---</td></tr> </table> <p>ANGULAR ±---°</p> | | mm | INCH | 4 PLACES | ±--- | ±--- | 3 PLACES | ±--- | ±--- | 2 PLACES | ±--- | ±--- | 1 PLACE | ±--- | ±--- | <p>DIMENSION STYLE IN/MM</p> <p>DRAWN BY DATE GUZIK 1990/02/26</p> <p>CHECKED BY DATE PATEL 1990/02/26</p> <p>APPROVED BY DATE LENZ 1990/02/26</p> | <p>SCALE ---</p> <p>DESIGN UNITS INCH</p> <p>THIRD ANGLE PROJECTION</p> | <p>TITLE FRICTION LOCK HEADER ASY .100 CL. BENT SQ. PINS 7832 SERIES DWG W/VOIDS</p> <p>Molex MOLEX INCORPORATED</p> |
| | mm | INCH | | | | | | | | | | | | | | | | | | |
| 4 PLACES | ±--- | ±--- | | | | | | | | | | | | | | | | | | |
| 3 PLACES | ±--- | ±--- | | | | | | | | | | | | | | | | | | |
| 2 PLACES | ±--- | ±--- | | | | | | | | | | | | | | | | | | |
| 1 PLACE | ±--- | ±--- | | | | | | | | | | | | | | | | | | |
| <p>MATERIAL NO. SEE CHART</p> | | <p>DOCUMENT NO. SDA-7832</p> | | <p>SHEET NO. 3 OF 3</p> | | | | | | | | | | | | | | | | |
| <p>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</p> | | | | | | <p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p> | | | | | | | | | | | | | | |

| | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|--|----|----|----|---|---|---|---|---|---|---|---|---|--|
|--|----|----|----|---|---|---|---|---|---|---|---|---|--|