

# Customer Information Sheet

DRAWING No.: M22-30600XX


IF IN DOUBT - ASK

©


NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

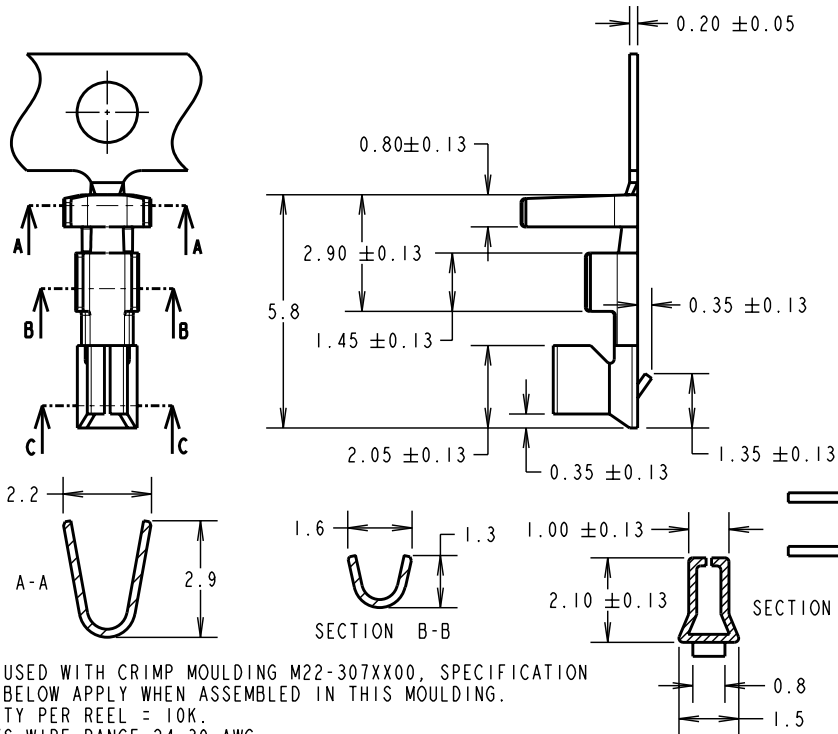

SPECIFICATIONS:  
 MATERIAL = PHOSPHOR BRONZE  
 FINISH:  
 05 = 0.1µ GOLD  
 46 = 2.5µ 100% TIN OVER NICKEL  
 ELECTRICAL:  
 VOLTAGE RATING = 250V AC/DC  
 CURRENT RATING = 2A AC/DC  
 DIELECTRIC STRENGTH = 800V AC FOR 1 MINUTE  
 INSULATION RESISTANCE = 1,000 MEGOHMS MIN  
 ENVIRONMENTAL:  
 TEMPERATURE RANGE = -25°C TO +85°C

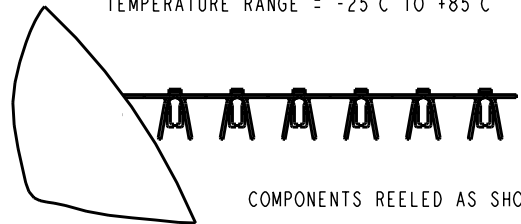

- NOTES:
1. TO BE USED WITH CRIMP MOULDING M22-307XX00, SPECIFICATION SHOWN BELOW APPLY WHEN ASSEMBLED IN THIS MOULDING.
  2. QUANTITY PER REEL = 10K.
  3. ACCEPTS WIRE RANGE 24-30 AWG.
  4. DIAMETER OF WIRE INSULATION =  $\varnothing 1.4$  MAX
  5. PITCH BETWEEN CONTACTS = 7mm.
  6. FOR HAND CRIMPING ONTO WIRE, USE HAND TOOL Z22-020 (INSTRUCTION SHEET IS-05). STRIP WIRE BY 1.5 - 2.0mm BEFORE CRIMPING.

ORDER CODE:  
**M22-30600XX**  
 FINISH:  
 05 = GOLD  
 46 = 100% TIN OVER NICKEL

CP	10	25.08.10	10907
NAME	ISS.	DATE	C/NOTE
APPROVED: C.PENROSE			
CHECKED: R.ADDE			
DRAWN: D.BECK			
CUSTOMER REF.:			
ASSEMBLY DRG:			

			THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.	TOLERANCES X. = ±1mm X.X = ±0.25mm X.XX = ±0.10mm X.XXX = ±0.01mm ANGLES = ±5° UNLESS STATED	MATERIAL: SEE ABOVE	TITLE: 2mm CRIMP TERMINAL (REELED)	DRAWING NUMBER: <b>M22-30600XX</b>	SHT 2 OF 2
HARWIN USA TEL: 603 893 5376 FAX: 603 893 5396 mis@harwin.com	HARWIN Europe (UK) TEL: 023 9231 4545 FAX: 023 9231 4590 mis@harwin.co.uk	HARWIN Asia TEL: +65 6 779 4909 FAX: +65 6 779 3868 mis@harwin.com.sg						