
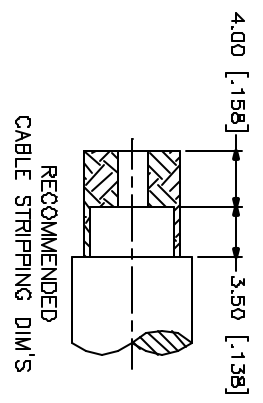


REV.	DATE	DESCRIPTION
A	03/20/05	MODIFY DESCRIPTION - UPDATE DRAWING FORMAT

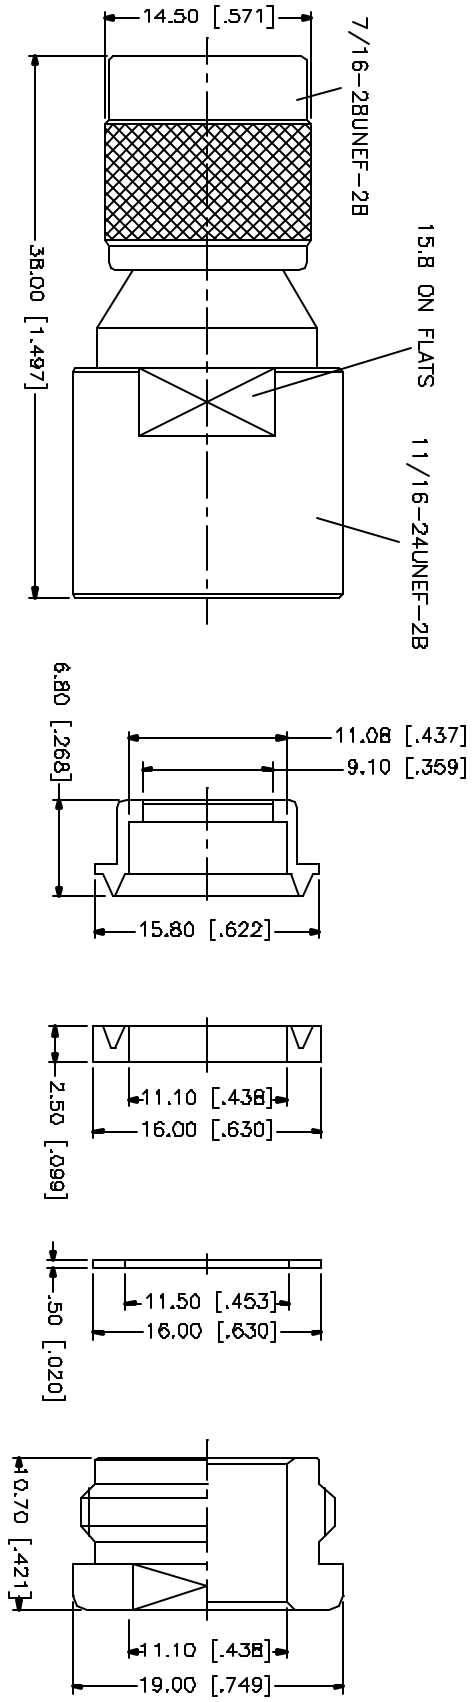

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	15.8 ON FLATS
1	NICKEL	BRASS	7/16-28UNEF-2B
1	NICKEL	BRASS	11/16-24UNEF-2B
1	RED	SILICONE	WASHER
1	RED	SILICONE	GASKET
1	NICKEL	BRASS	BRAID CLAMP
1	GOLD	BRASS	CONTACT PIN
1	NATURAL	TEFLON	INSULATOR
1	NICKEL	BRASS	BODY

APPROVALS	DATE
DRAWN G.R.S.	03/20/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

PART NO.	DESCRIPTION
122381	TNC CLAMP PLUG (FOR RG-8/U, 213/U, 214/U CABLE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MILLIMETERS AND DECIMALS THEREOF. DIMENSIONS FOR STRIPPER ARE: TOLERANCES FOR STRIPPER ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, DIMENSIONS FOR METERS ARE: 0.20 - 3.15 - ± 0.007" 3.15 - 1.180 - ± 0.015" 1.180 - 4.724 - ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	03/20/05

CAD FILE	DWG. NO.	REV.	SIZE	SCALE
C:/122/122381.DWG	122381.DWG	A	A	NA

Amphenol Connex

TNC CLAMP PLUG
(FOR RG-8/U, 213/U, 214/U CABLE)