


REV.	DATE	DESCRIPTION
A	05/29/03	UPDATE DRAWING FORMAT

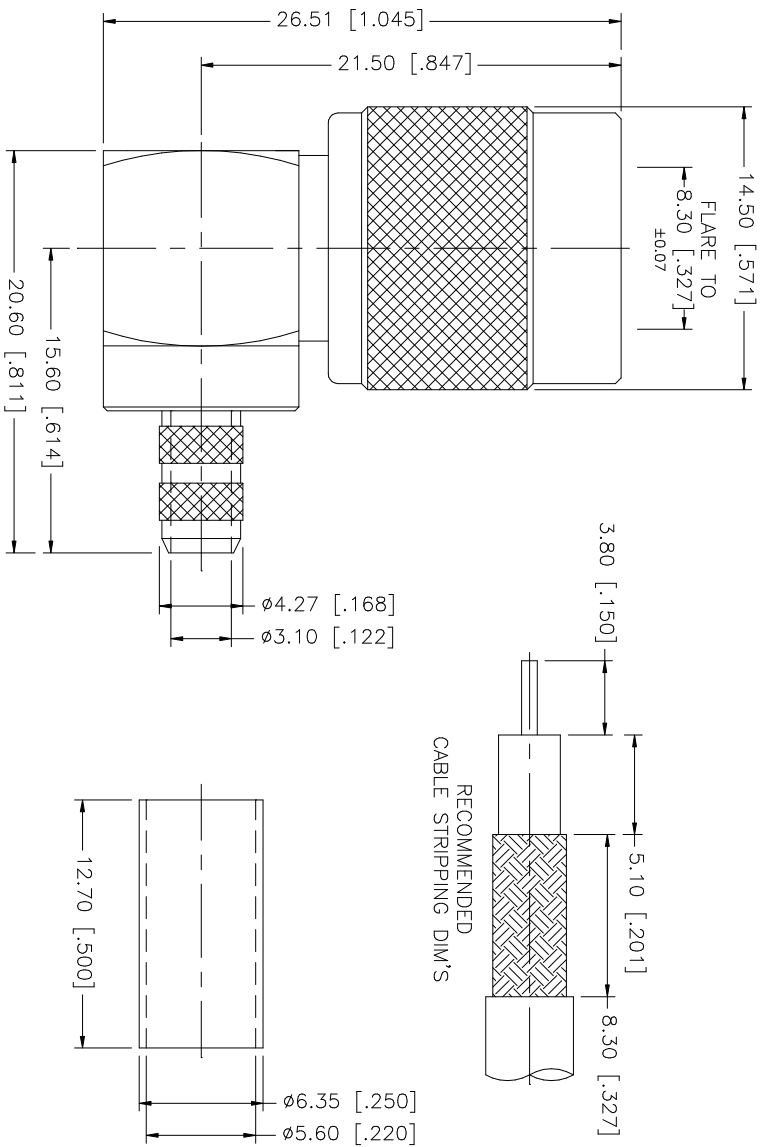

NOTE:
1. CONTACT PIN TO SOLDER

8						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex PART DESCRIPTION TNC R/A CRIMP PLUG (FOR RG-55/U, 142A/U, 223/U, 400/U)		
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	05/29/03			
6					0.5 - 8mm ± 0.20mm	CHECKED					
5	NUT	BRASS	NICKEL	1	8 - 30mm ± 0.40mm	ISSUED					
4	FERRULE	COPPER	NICKEL	1	30 - 120mm ± 0.50mm	SHEET	1 OF 1				
3	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	CAD FILE					
2	INSULATOR	TEFLON	NATURAL	1	.020 - .315 = ± 0.007"	C:/122/122430.DWG					
1	BODY	BRASS	NICKEL	1	.315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	DWG. NO. 122430.DWG					
DESCRIPTION		MATERIAL		FINISH		QTY		REV. A		SIZE A	SCALE NA