


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 0	RELEASED	6/11/98	TWag

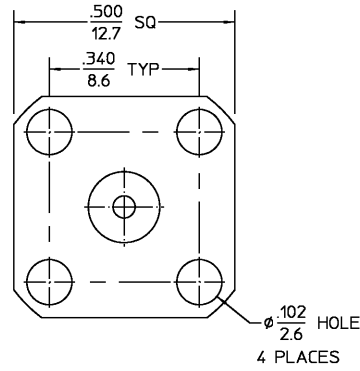

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 310-2	Temperature Rating -65°C To +125°C
Frequency Range (GHz) DC to 18	Recommended Mating Torque 7-10 In-Lbs	Vibration MIL-STD-202, Method 204 204, Condition D
Volt Rating (VRMS MAX) Sea Level 335	Mating Characteristics: Insertion (MAX Lbs) 3.0	Shock MIL-STD-202, Method 213, Condition I
VSWR 1.02 ± .005f GHz	Withdrawal (MIN Oz) 1.0	Thermal Shock MIL-STD-202, Method 107, Condition B
Insertion Loss (dB MAX) .06 √f GHz	Force to Engage and Disengage (In/Lbs MAX) 2	Moisture Resistance MIL-STD-202, Method 106, Except Vibration Shall Be Omitted
RF Leakage (dB MIN) -90 @ 2-3 GHz	Center Contact Captivation Axial (Lbs) 6.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Corona, 70,000 Ft (VRMS MIN) 250	Radial (In/Oz) 4.0	
Dielectric Withstanding Voltage (VRMS MIN) Sea Level 1000	Weight (Grams) TBD	
Contact Resistance (Milliohms MAX) Center Contact 2.0		
Outer Contact 2.0		
Cable to Housing N/A		
RF High Potential Sea Level (VRMS MIN @ 5 MHz) 670		
IR (Megohms MIN) 5,000		

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON	DRAWN BY TR MAGNER	DATE 6/11/98	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
FRAC. DEC. ANGLES ± 1/64 ± .005 ± °	CHECKED BY TWag	6/11/1998	
USE ASSY PROCEDURE	NO. AP. N/A		

TITLE OSM FLANGE MOUNT JACK RECEPTACLE STRAIGHT TERMINAL		
SIZE B	CODE IDENT NO. 26805	REV 01 0
SCALE 5 : 1	SHEET 1 OF 1	

CUSTOMER DRAWING AMP PART # 1255031-1 SHEET 1 OF 1 REV A