



CONSTRUCTION:

- BODY ----- ZINC ALLOY
- HOUSING ----- POLYESTER BUTYLENE TEREPHTHALATE (BLACK)
- CENTER CONTACT -- PHOSPHOR BRONZE
- DIELECTRIC ----- POLYPROPYLENE (94V2)
- MOUNTING POST --- BRASS
- SOLDER TAIL ----- COPPER OVER STEEL WIRE
- LOCK WASHER ----- PHOSPHOR BRONZE
- NUT ----- BRASS

FINISH:

- BODY ----- NICKEL
- CENTER CONTACT -- TIN
- SOLDER TAIL ----- TIN
- MOUNTING POST --- TIN
- LOCK WASHER ----- NICKEL
- NUT ----- NICKEL

PACKAGING ----- TRAY

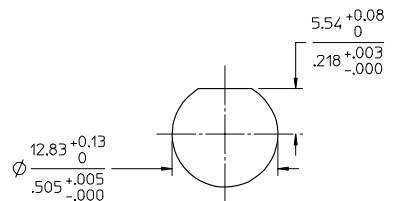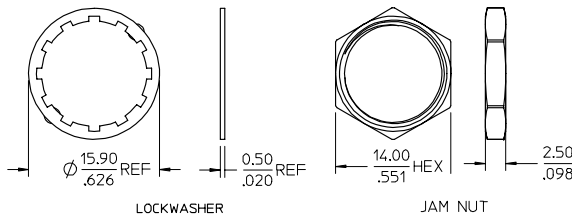

RECOMMENDED MOUNTING HOLE
 MAX PANEL THICKNESS: 5.5MM
 RECOMMENDED MOUNTING TORQUE:
 5 INCH-POUNDS MAX

CHG: CHANGE TITLE FROM R/A TO VERTICAL EC NO: URF2008-0292 DRWN: JMWENER 2007/11/29 CHKD: SSHAH 2007/11/29 APPR: JMWENER 2007/11/29 REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION															
	$\nabla=0$ $\nabla=0$	<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± .15</td> <td>± .005</td> </tr> <tr> <td>3 PLACES</td> <td>± .20</td> <td>± .008</td> </tr> <tr> <td>2 PLACES</td> <td>± .30</td> <td>± .012</td> </tr> <tr> <td>1 PLACE</td> <td>± .50</td> <td>± .020</td> </tr> </table>		mm	INCH	4 PLACES	± .15	± .005	3 PLACES	± .20	± .008	2 PLACES	± .30	± .012	1 PLACE	± .50	± .020	MM/IN	1:1	METRIC	<input checked="" type="checkbox"/> THIRD ANGLE PROJECTION
		mm	INCH																		
	4 PLACES	± .15	± .005																		
3 PLACES	± .20	± .008																			
2 PLACES	± .30	± .012																			
1 PLACE	± .50	± .020																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY: IRIS WANG CHECKED BY: DATE APPROVED BY: DATE MATERIAL NO.: DOCUMENT NO.: SD-73131-5005	TITLE: BNC, JACK PCB VERTICAL 50 OHM BNC-JACK MOLEX INCORPORATED	SHEET NO.: 1 OF 1																		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																					