REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A1	REVISED PER ECO-11-005294	14APR11	HMR

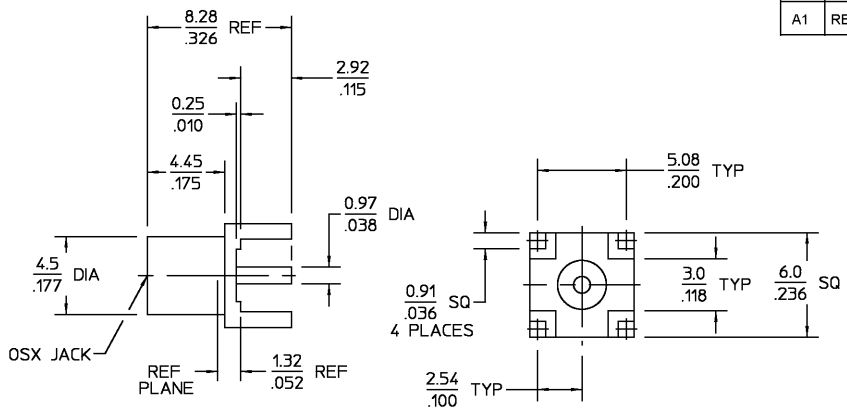

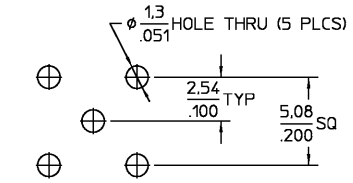

RECOMMENDED MOUNTING HOLE PATTERN

CAPTURED CENTER CONTACT

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Force to Engage: (Lbs)	Temperature Rating
Frequency Range (GHz) DC TO 6.0	3.4 MAX	-65°C to +165°C
Voltage Rating	Force to Disengage: (Lbs)	Vibration
(VRMS MAX) 335 @ Sea level	1.77 MIN - 4.5 MAX	MIL-STD-202, Method 204,
VSWR N/A	Center Contact Captivation:	Condition B
Insertion Loss N/A	Axial 4.5lbs @ 1 minute	Thermal shock
Corona, 70,000 Ft (VRMS MIN) 250	with .006" displacement	MIL-STD-202, Method 107,
D.W.V.		Condition B
(VRMS MIN) 1000		Moisture Resistance
Contact Resistance	XX.XX = mm	MIL-STD-202, Method 106
Center Contact (Milliohms MAX) 5.0	.XXX = in	Corrosion
Outer Contact (Milliohms MAX) 1.0		MIL-STD-202,
RF High Potential		Method 101, Condition B,
(VRMS MIN @ 5 MHz) 670		48 Hrs
I.R. (Megohms Min) 10,000		

COMPONENT	MATERIAL	FINISH
HOUSING	BRASS, PER ASTM-B-16 HALF HARD	NICKEL PLATE PER QQ-N-290
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS
TOLERANCE ON DEC. ±0.13 ANGLES ± 1°

DRAWN BY K.C.MAHER DATE 10/18/90
CHECKED BY M.Y. 10-19-90
APP'D BY [illegible] 10-19-90

USE ASS'Y PROCEDURE
NO. A.P. N/A

TE Connectivity

TITLE
OSX PRINTED WIRING BOARD JACK RECEPTACLE STRAIGHT TERMINAL

SIZE	CODE IDENT NO.		REV
B	26805	1060985-1	A1

CUSTOMER DRAWING | SCALE 5 : 1 | SHEET 1 OF 1

Downloaded from Elcodis.com electronic components distributor