
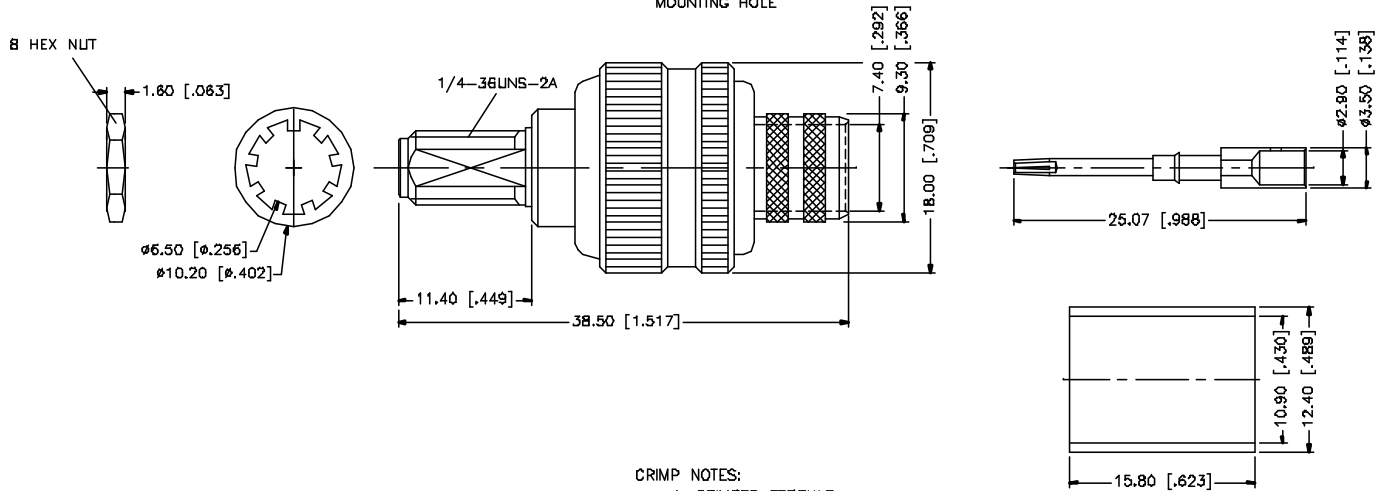



REV.	DATE	DESCRIPTION
NC	07/16/01	INITIAL RELEASE
A	05/17/05	UPDATE DRAWING FORMAT

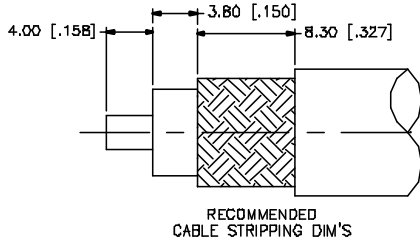

- CRIMP NOTES:
1. CRIMPED FERRULE  
HEX CRIMP SIZE .429"
  2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .118"
  3. MAX. PANEL THICKNESS = 3.2mm

DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	<h1 style="color: blue; margin: 0;">Amphenol Connex</h1>		
8	FERRULE	COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN G.R.S.		<b>SMA BULKHEAD CRIMP JACK (FOR BELDEN 9913, 9914, LMR-400)</b>	
7	HEX NUT	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CHECKED			PART DESCRIPTION
4	LOCK WASHER	BRASS	GOLD	1	DO NOT SCALE DRAWING	ISSUED			PART NO.
3	CONTACT PIN	BRASS	GOLD	1		SHEET 1 OF 1	132333		
2	INSULATOR	TEFLON	NATURAL	1		CAD FILE	DWG. NO. 132333.DWG	REV. A	
1	BODY	BRASS	GOLD	1		C:/132/132333.DWG		SIZE A	
								SCALE NA	