


REV.	DATE	DESCRIPTION
A	01/10/04	UPDATE DRAWING FORMAT

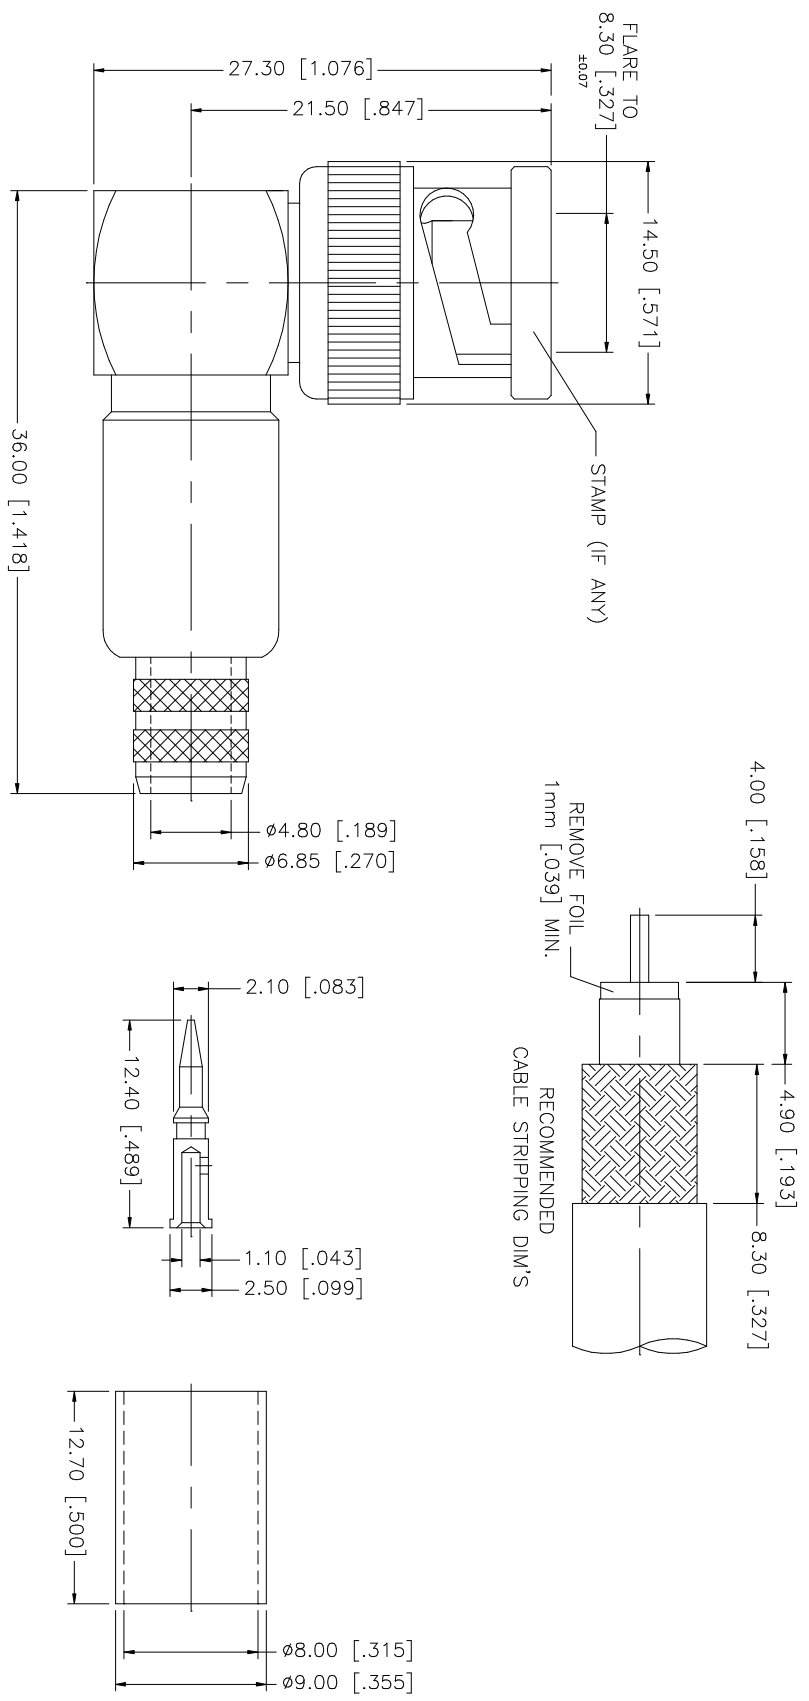

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .319"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	PART DESCRIPTION
8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	DRAWN	01/10/04	Amphenol Connex BNC R/A CRIMP PLUG (FOR RG-6/U CABLE) 112540
7					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES FOR MILLIMETERS ARE:	G.R.S.		
6					0.5 - 8mm ± 0.20mm	CHECKED		
5	FERRULE	COPPER	NICKEL	1	8 - 30mm ± 0.40mm	ISSUED		
4	CONTACT PIN	BRASS	GOLD	2	30 - 120mm ± 0.50mm	SHEET	1 OF 1	
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES FOR INCHES ARE:			
2	INSULATOR	TEFLON	NATURAL	1	.020 - .315 = ± 0.007"			
1	BODY	BRASS	NICKEL	1	.315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE		
						C:/112/112540.DWG		
						DWG. NO.		
						112540.DWG		
						REV.		
						A		
						SIZE		
						A		
						SCALE		
						NA		