


REV.	DATE	DESCRIPTION
NC	08/10/99	INITIAL RELEASE

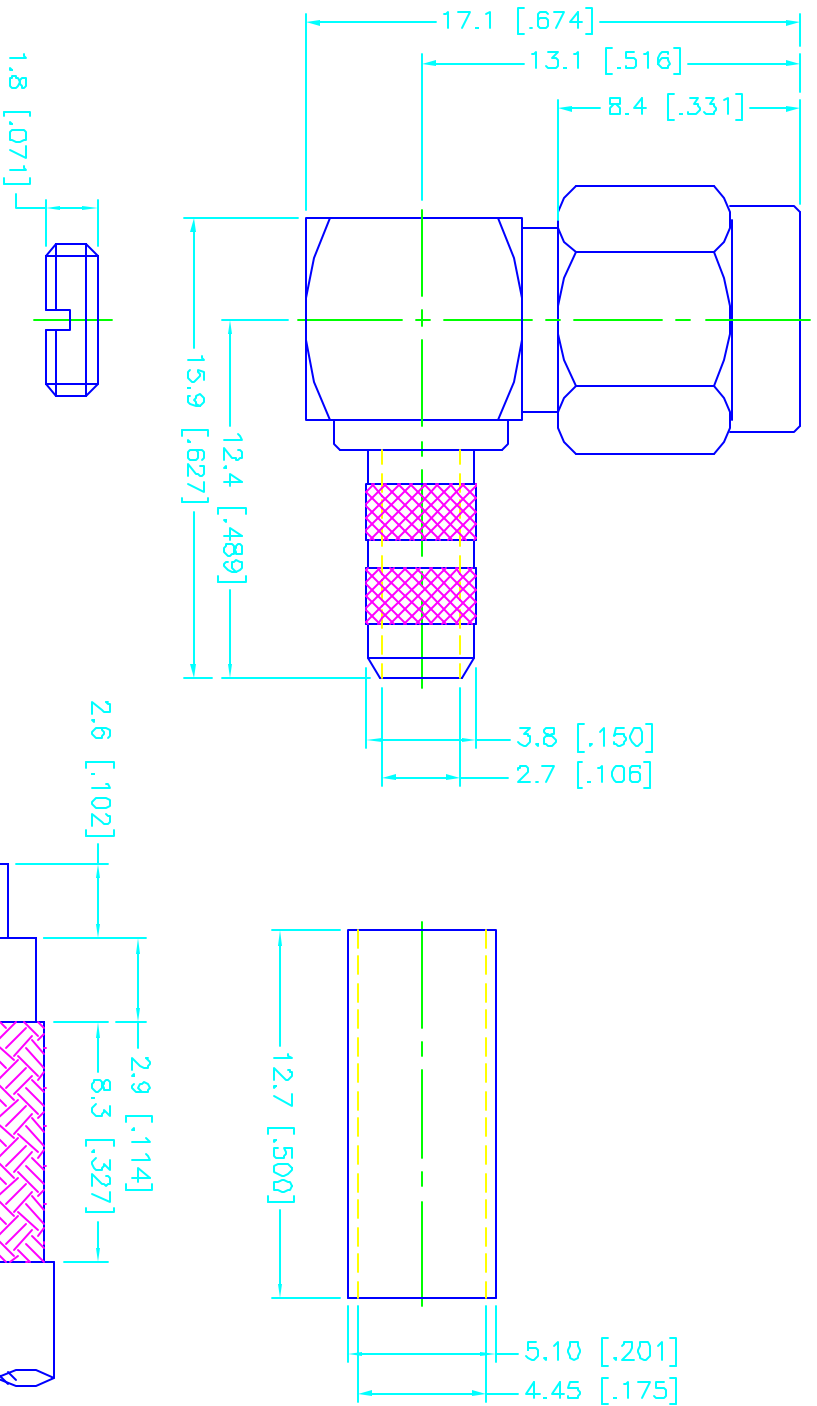

RECOMMENDED
CABLE STRIPPING DIM'S

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS IN [] ARE IN INCHES DIMENSIONS IN [] ARE IN MILLIMETERS FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	TITLE	SCALE	PART NO.	SHEET	
1 BODY	BRASS	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-375 = ± 1 375-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN	08/10/99	comnex Connector Corporation SMA R/A CRIMP PLUG (FOR RG-180B/U, 195/U, B8218, B1835, B1865)	NA	1 322272	1 OF 1	
2 INSULATOR	TEFLON	NATURAL		CHECKED	G.R.S.			SIZE		
3 CONTACT PIN	BRASS	GOLD		ISSUED				FORM NO.	99001	DWG. NO.
4 COVER	BRASS	GOLD								
5 FERRULE	COPPER	GOLD								
6										
7										
8				DO NOT SCALE DRAWING						