


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/15/09	XXXXXX	INITIAL RELEASE

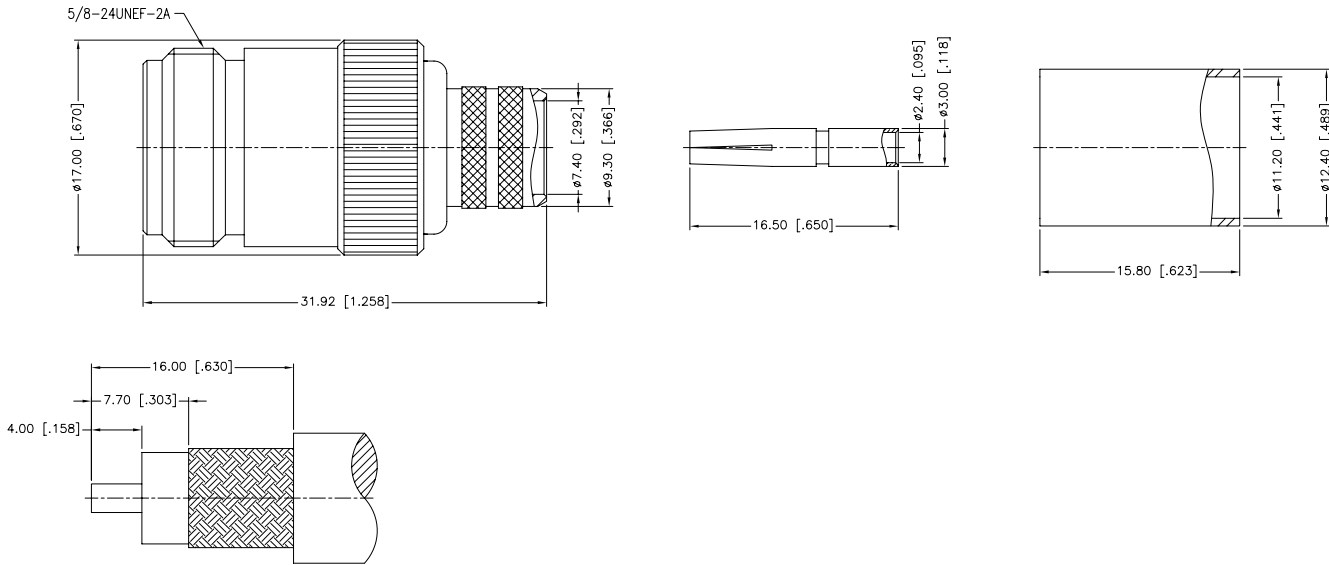

RECOMMENDED  
CABLE STRIPPING DIM'S

- NOTES:
1. CRIMPED FERRULE  
HEX CRIMP SIZE .429"
  2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .100"

				APPROVALS	DATE	<b>Amphenol Connex</b>							
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:</small> 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:</small> .020 - .315 ± ± 0.007" .315 - 1.180 ± ± 0.015" 1.180 - 4.724 ± ± 0.020"				DRAWN J.CHENG	09/15/09	<b>N CRIMP JACK</b>  PART NO. <b>172209</b>							
5 FERRULE BRASS ALBALOY 1 4 CONTACT PIN PHOSPHOR BRONZE GOLD 1 3 BARREL BRASS ALBALOY 1 2 INSULATOR PTFE NATURAL 1 1 BODY BRASS ALBALOY 1				CHECKED						PART DESCRIPTION			
DESCRIPTION MATERIAL FINISH QTY DO NOT SCALE DRAWING				ISSUED						DWG. NO. 172209.DWG			
				SHEET	1 OF 1	SCALE NA							
				CAD FILE	C:/CONNEX/172209.DWG	REV. NC SIZE A							