


NOTES:

1. MATERIALS AND PLATING:


BODY: BRASS, GOLD PLATED  
 CONTACT: BRASS, GOLD PLATED  
 RING: BERYLLIUM COPPER, GOLD PLATED  
 FERRULE: COPPER ALLOY, GOLD PLATED  
 INSULATOR: PTFE

2. FOR CABLE STRIPPING AND ASSEMBLY INSTRUCTIONS  
 SEE 349-50627, SHT 2 SOLDER CENTER CONTACT AND  
 BODY USING Sn60 SOLDER PER QQ-S-571.

908-41600		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	11/7/96	41601	BCG
	B	SEE SHEET 1	4/27/00	43271	CPM



CABLE STRIPPING DIMENSIONS

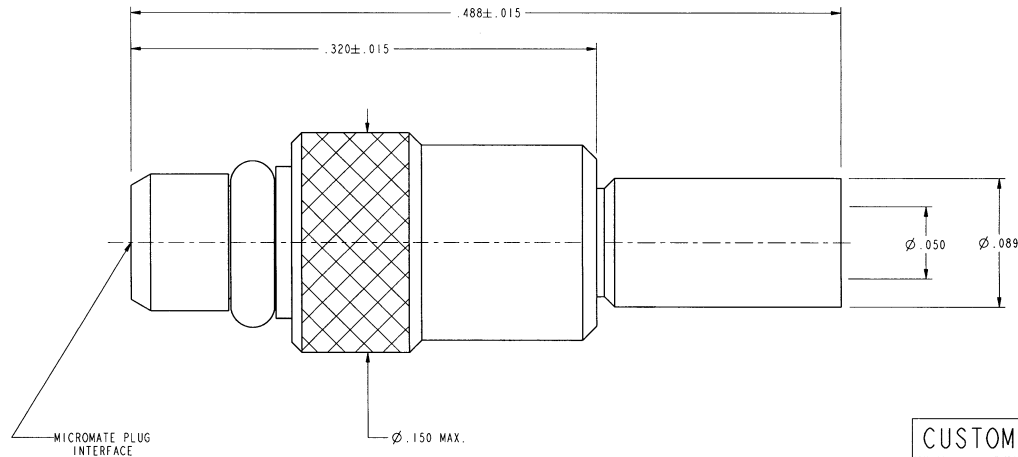

CUSTOMER OUTLINE DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0.381 mm) ±.005 (0.127 mm) ± 1°	MATERIAL	DRAWN B. GLEISSNER	DATE 11-Oct-96	TITLE MICROMATE PLUG, SOLDER TYPE FOR Ø.047 S/R CABLE	<b>Amphenol</b> Amphenol Corporation Communication and Network Products Division Danbury, CT U.S.A. 06810
	REFERENCE EAR 964688-0 GEN# ASSYM3.MMCX	ENGINEER B. GLEISSNER	DATE 11-Oct-96	APPROVED B. GLEISSNER	
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	CAD FILE 1:\MMCX\908-41600	CODE ID 74868	DWG SIZE B	DRAWING NO. 908-41600	REV B