
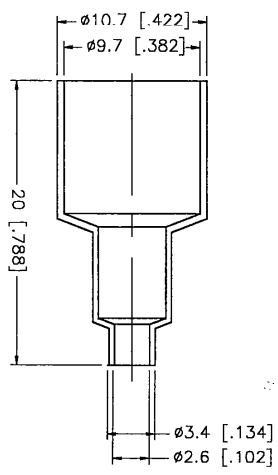
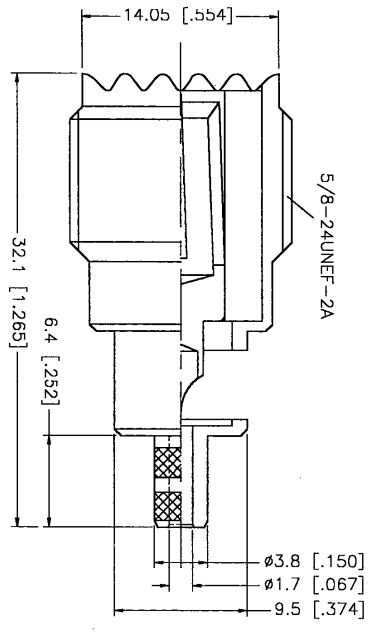


| REV. | DATE | DESCRIPTION |
|------|----------|-----------------|
| NC | 09/29/99 | INITIAL RELEASE |

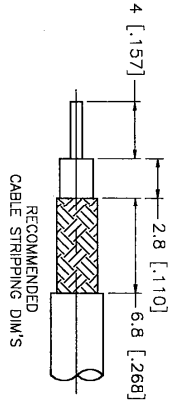

| DESCRIPTION | MATERIAL | FINISH | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS FOR CUSTOMER REFERENCE ONLY | APPROVALS | DATE | TITLE | SCALE | PART NO. | SHEET | REV. |
|---------------|----------|---------|--|--------------|----------|---|-------|----------|--------|--------|
| 1 BODY | BRASS | NICKEL | | DRAWN G.R.S. | 09/29/99 | Connex Connector Corporation UHF CRIMP JACK (FOR RG174/U, 188/U, 316/U CABLE) | A | 99001 | 182307 | 1 OF 1 |
| 2 INSULATOR | DELRIN | NATURAL | | CHECKED | | | | | | |
| 3 CONTACT PIN | BRASS | GOLD | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: | ISSUED | | | | | | |
| 4 FERRULE | BRASS | NICKEL | 0.5-6 = ± 0.2 | | | | | | | |
| | | | 6-30 = ± 0.4 | | | | | | | |
| | | | 30-120 = ± 0.6 | | | | | | | |
| | | | 120-315 = ± 1 | | | | | | | |
| | | | 315-1000 = ± 1.6 | | | | | | | |
| | | | 1000-2000 = ± 2.4 | | | | | | | |
| | | | DO NOT SCALE DRAWING | | | | | | | NC |