

FORM TO AMPHENOL SPEC 349-50560. CONTACT AND BODIES SLEEVE AND FERRULE ARE NICKEL PLATED. (REF) 227-944, HEX DIE 227-1221-09 (.178 HEX). S DRAWING.

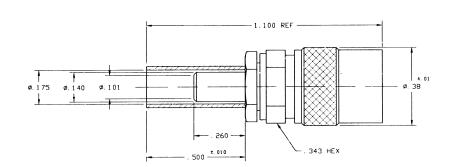



## CABLE STRIPPING DIMENSIONS

## CUSTOMER DRAWING

vs. ARE. IN INCHES, AND TOLERANCES ARE.  5 PLACE DECIMAL,  ANGLES  ± 1'  - Other data (1) ore, and remain the eturned upon request, and (3) are y person other than those to whom they ng of these drawings, specifications, or ng of these drawings, and the specification of the person to manufacture, use or sell any theraise, that may on any woy be related to is, or other data.	REFERENCE EAR 102-967107 0	DRAWN P. BRENZEL ENGINEER P. BRENZEL APPROVED T. AUBI N	DATE 8 DCT 98 DATE 8 DCT 98 DATE 1 0 / 1 4 / 98	LC	SMB 75 OHM PLUG LOCKING TYPE		Amphenol Amphenol Corporation RF/Microwave Operations Danbury, Conn USA 06810  SCALE 4:1 SHEET 2 OF 2		
		CAD FILE H: \PETE\SMB\903\ASSY\152P717C			74868 B DRAWING NO			) 3-152P-7	71 S7