


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	DESCRIPTION	WEIGHT
CJ64XXXXXX	6 POSITION, 4 WIRE TERMINATION CAP	1.62 lb/100 PCS. 1.738 g/100 PCS.)
CJ66XXXXXX	6 POSITION, 6 WIRE TERMINATION CAP	1.62 lb/100 PCS. 1.738 g/100 PCS.)
CJ66UXXXXXX	6 POSITION, 6 WIRE MODULAR JACK TERMINATION CAP IS COLOR CODED FOR USOC WIRING SCHEME	1.62 lb/100 PCS. 1.738 g/100 PCS.)

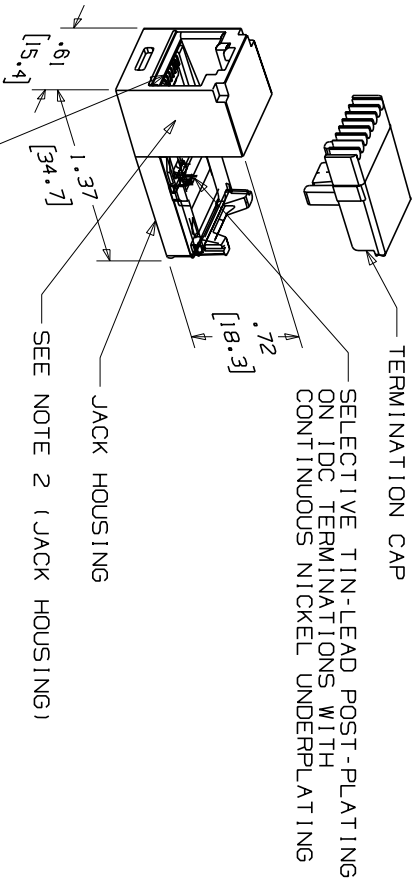

- NOTE:
- SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
 - MATERIAL:
JACK HOUSING - ABS
NOMINAL WALL THICKNESS .0781 2.01.
TERMINATION CAP - POLYCARBONATE.
THIS PART IS DESIGNED FOR USE WITH MINI-COM PLATES AND BOXES.
 - MEETS ALL CATEGORY 3 PERFORMANCE REQUIREMENTS AS DEFINED BY EIA/TIA.
 - DIMENSIONS IN PARENTHESIS ARE IN METRIC.

QAD FILENAME/LAYERS
M02479NJ_DC349_00A.PRT

PANDUIT
CORP., TINLEY PARK, ILLINOIS
MINI-JACK CATEGORY 3 TWISTED
PAIR CONNECTOR MODULE
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.XX) ± .03 ANGLES ± 1°
(.XXX) ± .005

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION,
SCALE NONE

REV	DATE	BY	CHK	DESCRIPTION	ECN	CHK	CUST	SUP	DATE	DRAWN BY	DATE	CHECKED BY	MAT'L:	DRAWING NO.	DWG
R	3-25-06	NER		RELEASED TO PRODUCTION	02479-349				3-25-06	NER	3-25-06		AS NOTED	02479-349	A