



ME 22,5 TBUS 1,5/ 5-ST-3,81 GN

Order No.: 2707437

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2707437>DIN rail connector for current transducers, gold-plated contacts, for
DIN rail mounting, 5-pos.**Commercial data**

GTIN (EAN)	 4 017918 911928
sales group	F051
Pack	50 pcs.
Customs tariff	85472000
Catalog page information	Page 497 (IF-2011)

Product notesWEEE/RoHS-compliant since:
01/01/2003

[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**General**

Color	green
-------	-------

Dimensions / positions

Length	40 mm
Constructional height	20 mm

Technical data

Connection in acc. with standard	CUL
----------------------------------	-----

Nominal voltage U_N	150 V
Nominal current I_N	8 A
Indicator1	CUL1
Inflammability class acc. to UL 94	V0

Certificates / Approvals





Certification

CUL, UL

Diagrams/Drawings

Dimensioned drawing

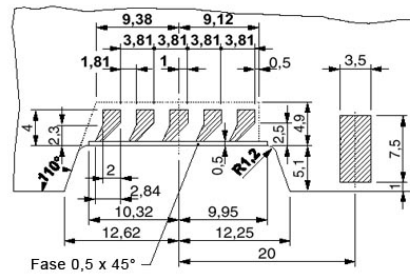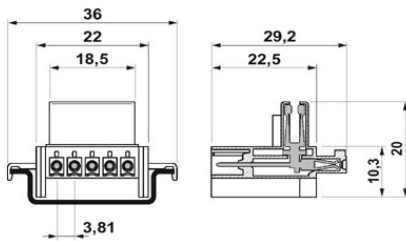

Detailed dimensional drawing of the DIN rail connector contact pads

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;