Component Specifications

QuickPort® Single-Gang Wallplates

APPLICATION

Field-configurable wallplates accept QuickPort* snap-in modules to support multimedia applications with 1, 2, 3, 4 or 6 ports. Use where a one-piece, single-gang, economical flush-mount housing is desired. Five color choices, with color-matched screws.

FEATURES

- Color-matched wallplate screws
- · Five color choices: ivory, white, grey, black and almond
- Fits within minimum rectangular NEMA openings
- Compatible with all individual QuickPort modules
- Individual-port configurability allows specification flexibility
- Narrow module width allows high port density in a small area

STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: UL Listed; CSA certified; complies with TIA/EIA-568-B.

PHYSICAL SPECIFICATIONS

Dimensions: 4.5"H x 2.75"W x .2"D (in-wall depth 1.2" w/

connectors installed)

Capacity: Available in 1-, 2-, 3-, 4- or 6-port versions Materials: High-impact, fire-retardant plastic rated UL

nigri-irripaci, nie-retardant piastic rated of

94V-0

Mounting: Color matched screws

DESIGN CONSIDERATIONS

- Fits single-gang backboxes, or four-square boxes with appropriate user-provided reducer.
- Put blanks in unused ports for future expansion.
- Specify port identification method (colored modules, designation labels, and custom silkscreening available). To ID ports, use different colored connectors for each application (full selection of TIA/EIA-606 compatible colors—13 available), or Leviton's pre-printed Port Designation Labels.

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



WARRANTY INFORMATION

For a copy of Leviton product warranties, log on to www.levitonvoicedata.com/warranty.

For ELECTRONIC Typical Specs see (.TXT) file on disk.

TYPICAL SPECIFICATION

The wallplate housing shall be a one-piece, single-gang flush mount style that fits standard NEMA openings, or four-square boxes with reducer. It should provide 1-, 2-, 3-, 4- or 6-ports. Must be able to accept all Leviton QuickPort modules. It must be made of high-impact, fire-retardant plastic rated UL 94V-0, and be UL Listed, CSA certified and compliant with TIA/EIA-568-B specifications.



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005. Spec sheets and updates are also available at www.levitonvoicedata.com.




QuickPort® Single-Gang Wallplates


Part Number 41080-xxP

DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images (.DXF, .DWG, MS-DOS.EPS)



Note: QuickPort snap-in modules (connectors and bulkhead connectors and couplings) are sold separately. Please refer to the QuickPort module spec sheets for ordering information.

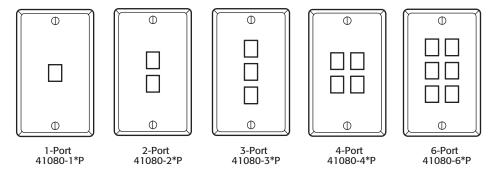

PART NUMBERS

Description	Part No.
QuickPort Single-Gang 1-Port Wallplate	41080-1*P
QuickPort Single-Gang 2-Port Wallplate	41080-2*P
QuickPort Single-Gang 3-Port Wallplate	41080-3*P
QuickPort Single-Gang 4-Port Wallplate	41080-4*P
QuickPort Single-Gang 6-Port Wallplate	41080-6*P

^{* =} Color Choices: Ivory (I), White (W), Grey (G), Black (E), Almond (A) Special order color: Brown (B)



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005. Spec sheets and updates are also available at www.levitonvoicedata.com.



2222 – 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available.