

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
HM	00	F	LR	DESCRIPTION	DATE	BY	APP
		A		ECO-09-010466	05MAY2009	JB	BM
		B		REV ECO-09-021320	28SEP09	LH	BM

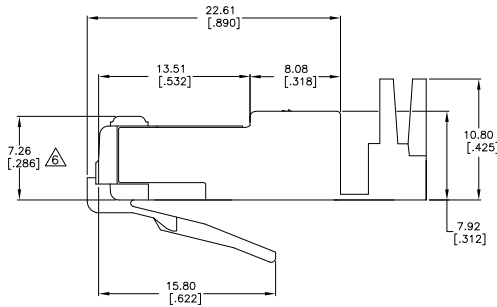

- 1 DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- 2 MATERIAL:
PLUG: POLYCARBONATE, 94V-0 RATED
CONTACT: PHOSPHOR BRONZE
CONTACT PLATING: .0013 [0.00050] HARD GOLD IN CONTACT AREA OVER .0025 [0.00100] MINIMUM NICKEL UNDERPLATE.
LOAD BAR: POLYCARBONATE 94V-0 RATED WITH CONDUCTIVE FILLER.
- 3 PRODUCT IS SHIPPED WITH CONDUCTIVE LOAD BAR.
- 4. PLUG INTERFACE DIMENSIONS CONFORM TO IEC 60603-7 SEC 3.2.3
- 5. CONDUCTOR JACKET OD RANGE 1.12/1.22 [0.044/0.048] SOLID OR STRANDED WIRE 22-28 AWG. OUTER JACKET OD RANGE 6.99/7.87 [0.275/0.310] NO LOGO ON TAB.
- 6. TERMINATED DIMENSION IS 5.89-6.15 [0.232-0.242].
- 7. ROHS COMPLIANT.
- 8. UL RECOGNIZED.
- 9. WIRE GUIDE PATTERN:
2,4,6,8 - TOP ROW
1,3,5,7 - BOTTOM ROW
- 10. 2500 ASSEMBLIES AND 2500 LOAD BARS PER PACKAGE.
- 11. 500 ASSEMBLIES AND 500 LOAD BARS PER PACKAGE.
- 12. 100 ASSEMBLIES AND 100 LOAD BARS PER PACKAGE.

12	5-1933433-3
11	5-1933433-2
10	1933433-1
	PACKAGED PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. BURWELL 02MAY2009 CHK S. MCNEILL 02MAY2009 APD B. MCNEILL PRODUCT SPEC:	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES] 0 P.L.C. * - 1 P.L.C. * - 2 P.L.C. * - 3 P.L.C. * - 4 P.L.C. * - ANGLES * - FINISH * -	TOLERANCES UNLESS OTHERWISE SPECIFIED: * - * - * - * - * - * - * -	APPLICATION SPEC: - WEIGHT: - CUSTOMER DRAWING	NAME: MODULAR PLUG, CAT 6, SHIELDED, .310 OD CABLE SIZE: A2 CASE CODE: 00779 DRAWING NO: C=1933433 RESTRICTED TO: - SCALE: 2:1 SHEET: 1 of 1 REV: B