

## VS-08-T-H-RJ45/IP67-BK

Order No.: 1658671




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1658671>

RJ45 sleeve housing, IP67, for pin insert VS-08-ST-H11-RJ45 and VS-08-ST-H21-RJ45, with push-pull interlocking for panel mounting frames, for cable cross section 5.0 mm ... 8.5 mm, color: black

### Ethernet

#### Commercial data

GTIN (EAN)	 4 046356 163170
sales group	D510
Pack	5 pcs.
Customs tariff	85366990
Catalog page information	Page 287 (PC-2011)

#### Product notes

WEEE/RoHS-compliant since:  
10/02/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

#### Technical data

##### Mechanical characteristics

Insertion/withdrawal cycles	≥ 1000
External cable diameter	5 mm ... 8.5 mm
Cable exit	Straight
Color	black

Ambient temperature (operation)	-40 °C ... 80 °C
---------------------------------	------------------

**Material data**


Inflammability class acc. to UL 94	V0
Housing material	PA
Material, O-ring	FPM
Cable seal material	NBR
Degree of protection	IP67

**Accessories**

Item	Designation	Description
<b>General</b>		
1652716	VS-08-ST-H11-RJ45	RJ45 pin insert, CAT5e, 8-pos., shielded, IDC connection method, for litz wires AWG 27 ... 26, with strain relief
1652729	VS-08-ST-H21-RJ45	RJ45 male insert, CAT6, 8-pos., shielded, IDC displacement connection, for litz wire AWG 25 ... 24 and solid wires AWG 24, with strain relief

**Diagrams/Drawings**

Dimensioned drawing

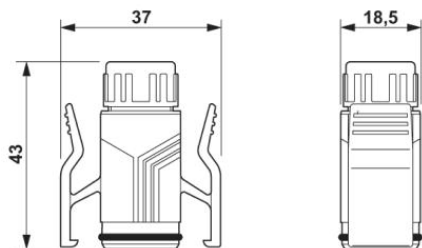

RJ45 sleeve housing IP67

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;