

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
P	LTR	DESCRIPTION	DATE	BY
AD	00			
	G2	REVISED PER ECO-11-004587	11MAR11	RK HMR

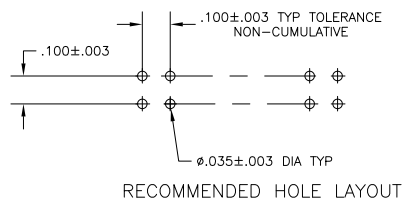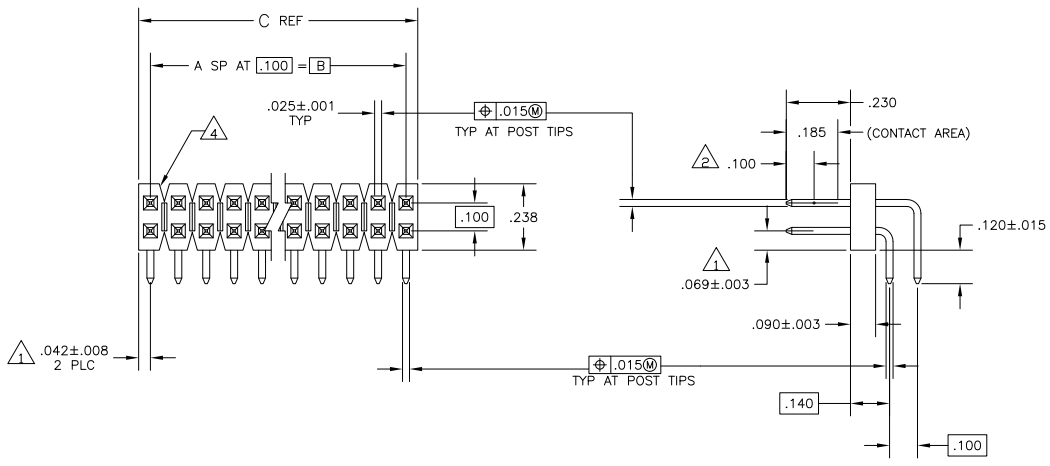

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. MOLL 23-10-87 OK T. CLARK 23-10-87 APD T. CLARK 29-10-87	TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .005 1 PLC ± .005 2 PLC ± .005 3 PLC ± .005 4 PLC ± .005 ANGLES ± .5°	NAME T. CLARK PRODUCT SPEC APPLICATION SPEC HEIGHT	HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 C/L, RIGHT ANGLE, WITH .025 SQ POSTS
MATERIAL: COPPER ALLOY COATING: GOLD PLATE BRONZE	FINISH: SEE TABLE	SIZE CASE CODE (DRAWING NO) A2 00779 C=103326	RESTRICTED TO CUSTOMER DRAWING SCALE 4:1 SHEET 1 of 2 REV G2

1471-9 (3/11)

103326

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
-	-	-	-	SEE SHEET 1	-	-	-

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 4 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5 .000015 GOLD IN THE CONTACT AREA, .000100--.000200 MATTE TIN--LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 6 .000015 GOLD IN THE CONTACT AREA, .000100--.000200 MATTE TIN ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 7 HIGH TEMPERATURE CONFIGURATION
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REMARKS	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
		3.984	3.900	39	80	9-103326-0		3.984	3.900	39	80	4-103326-0
		3.884	3.800	38	78	8-103326-9		3.884	3.800	38	78	3-103326-9
		3.784	3.700	37	76	8-103326-8		3.784	3.700	37	76	3-103326-8
		3.684	3.600	36	74	8-103326-7		3.684	3.600	36	74	3-103326-7
		3.584	3.500	35	72	8-103326-6		3.584	3.500	35	72	3-103326-6
		3.484	3.400	34	70	8-103326-5		3.484	3.400	34	70	3-103326-5
		3.384	3.300	33	68	8-103326-4		3.384	3.300	33	68	3-103326-4
		3.284	3.200	32	66	8-103326-3		3.284	3.200	32	66	3-103326-3
		3.184	3.100	31	64	8-103326-2		3.184	3.100	31	64	3-103326-2
		3.084	3.000	30	62	8-103326-1		3.084	3.000	30	62	3-103326-1
		2.984	2.900	29	60	8-103326-0		2.984	2.900	29	60	3-103326-0
		2.884	2.800	28	58	7-103326-9		2.884	2.800	28	58	2-103326-9
		2.784	2.700	27	56	7-103326-8		2.784	2.700	27	56	2-103326-8
		2.684	2.600	26	54	7-103326-7		2.684	2.600	26	54	2-103326-7
		2.584	2.500	25	52	7-103326-6		2.584	2.500	25	52	2-103326-6
		2.484	2.400	24	50	7-103326-5		2.484	2.400	24	50	2-103326-5
		2.384	2.300	23	48	7-103326-4		2.384	2.300	23	48	2-103326-4
		2.284	2.200	22	46	7-103326-3		2.284	2.200	22	46	2-103326-3
		2.184	2.100	21	44	7-103326-2		2.184	2.100	21	44	2-103326-2
		2.084	2.000	20	42	7-103326-1		2.084	2.000	20	42	2-103326-1
		1.984	1.900	19	40	7-103326-0		1.984	1.900	19	40	2-103326-0
		1.884	1.800	18	38	6-103326-9		1.884	1.800	18	38	1-103326-9
		1.784	1.700	17	36	6-103326-8		1.784	1.700	17	36	1-103326-8
		1.684	1.600	16	34	6-103326-7		1.684	1.600	16	34	1-103326-7
		1.584	1.500	15	32	6-103326-6		1.584	1.500	15	32	1-103326-6
		1.484	1.400	14	30	6-103326-5		1.484	1.400	14	30	1-103326-5
		1.384	1.300	13	28	6-103326-4		1.384	1.300	13	28	1-103326-4
		1.284	1.200	12	26	6-103326-3		1.284	1.200	12	26	1-103326-3
		1.184	1.100	11	24	6-103326-2		1.184	1.100	11	24	1-103326-2
		1.084	1.000	10	22	6-103326-1		1.084	1.000	10	22	1-103326-1
		.984	.900	9	20	6-103326-0		.984	.900	9	20	1-103326-0
		.884	.800	8	18	5-103326-9		.884	.800	8	18	103326-9
		.784	.700	7	16	5-103326-8		.784	.700	7	16	103326-8
		.684	.600	6	14	5-103326-7		.684	.600	6	14	103326-7
		.584	.500	5	12	5-103326-6		.584	.500	5	12	103326-6
		.484	.400	4	10	5-103326-5		.484	.400	4	10	103326-5
		.384	.300	3	8	5-103326-4		.384	.300	3	8	103326-4
		.284	.200	2	6	5-103326-3		.284	.200	2	6	103326-3
		.184	.100	1	4	5-103326-2		.184	.100	1	4	103326-2
		.084			2	5-103326-1		.084			2	103326-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .0005 1 PLC ± .0005 2 PLC ± .0005 3 PLC ± .0005 4 PLC ± .0005 ANGLES ± .0005	DATE: 23-10-87 BY: MOLL CHK: CLARK DATE: 23-10-87 NAME: CLARK DATE: 29-10-87 PRODUCT SPEC: APPLICATION SPEC: WEIGHT:	TE Connectivity HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 C/L, RIGHT ANGLE, WITH .025 SQ POSTS SIZE CASE CODE (FORMING IS) A2 00779 C=103326 RESTRICTED TO:
---------------------------	---	--	---

CUSTOMER DRAWING SCALE: 1:1 SHEET 2 of 2 REV G2

103326

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B

A

D

C

B