


# PC 6-16/ 8-G-10,16

Order No.: 1913701

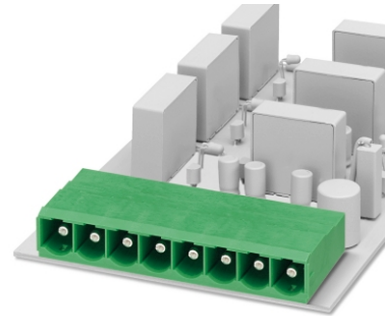

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1913701>

Header, Rated voltage (III/2): 1000 V, Number of positions: 8, Pitch: 10.16 mm, Color: green, Assembly: Soldering, The nominal current of 76 A applies in connection with connectors from the PC 16 family. 41 A are reached in connection with PC 6 connectors (50 A in accordance with UL).

Commercial data	
GTIN (EAN)	 4 017918 179182
sales group	E521
Pack	50 pcs.
Customs tariff	85366990
Catalog page information	Page 194 (CC-2002)

**Product notes**

WEEE/RoHS-compliant since: 01/01/2003

<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Certificates / Approvals



Certification

CB, CCA, CUL, GOST, SEV, UL

**Accessories**

Item	Designation	Description
------	-------------	-------------

**Plug/Adapter**

1600027	CP-HCC 4	Coding profile, Color: red
---------	----------	----------------------------

**Additional products**


Item	Designation	Description
------	-------------	-------------

**General**


1913565	PC 6/ 8-ST-10,16	Plug component, Nominal current: 41 A, Rated voltage (III/2): 1000 V, Number of positions: 8, Pitch: 10.16 mm, Connection method: Screw connection, Color: green
---------	------------------	--

**Diagrams/Drawings**

Drilling plan/solder pad geometry

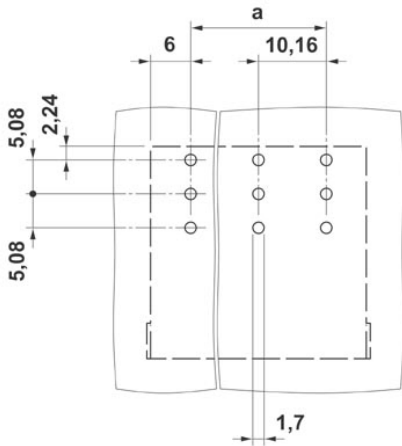

Dimensioned drawing

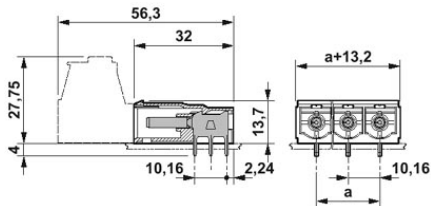

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;