

FEED-THROUGH FLAT BASE Panel Mount

For wire-to-wire connections in HVAC, appliance, equipment, power distribution and other industrial applications with strict budget and space requirements. Easy to use double row terminal strips are a cost-effective alternative to barrier strips or other types of terminal blocks. Simply strip the wire, insert and tighten the screw. Eurostrips feature tubular screw clamps, with wire protectors, and recessed metal parts for finger protection. The stainless steel wire protectors exhibit excellent memory and the most effective connection.

Eurostrips described on this and the following page are available with a flat base for minimum clearance applications. They can be panel mounted or left to free float. Offered in easy-to-cut standard 12-pole strips, they can also be ordered precut with the required number of poles.

- Tubular screw clamp
- Panel mount or free float
- Housing material:
 - Polyamide 66/6
 - V-O flammability
- Color: opaque white
- Marking plates or factory imprinted application

HE1



Flat base with wire protector

HE4



Flat base with wire protector

Pole Spacing	8 mm
Mounting Hole Diameter	3 mm
Stripping Length	5 mm
Approvals	
Wire Range	1-2.5 mm ² 24-12 AWG
Voltage Rating	400 V 300 V
Current Rating	6 A 20 A
Torque	0.5 Nm 4.4 lb-in
Other Approvals	


Pole Spacing	8 mm
Mounting Hole Diameter	3 mm
Stripping Length	5 mm
Approvals	
Wire Range	1-2.5 mm ² 24-12 AWG
Voltage Rating	400 V 300 V
Current Rating	6 A 20 A
Torque	0.5 Nm 4.4 lb-in
Other Approvals	

Pole Spacing	10 mm
Mounting Hole Diameter	3.6 mm
Stripping Length	6 mm
Approvals	
Wire Range	2.5-4 mm ² 24-10 AWG
Voltage Rating	400V 300 V
Current Rating	10 A 30 A
Torque	0.8 Nm 7.0 lb-in
Other Approvals	

No. of Poles	Cat. No.	Std. Pk.
2	HE1WPR/02	100
3	HE1WPR/03	100
4	HE1WPR/04	100
5	HE1WPR/05	100
6	HE1WPR/06	50
7	HE1WPR/07	50
8	HE1WPR/08	50
9	HE1WPR/09	50
10	HE1WPR/10	50
11	HE1WPR/11	50
12	HE1WPR/12	50


No. of Poles	Cat. No.	Std. Pk.
2	HE4WPR/02	100
3	HE4WPR/03	100
4	HE4WPR/04	100
5	HE4WPR/05	100
6	HE4WPR/06	50
7	HE4WPR/07	50
8	HE4WPR/08	50
9	HE4WPR/09	50
10	HE4WPR/10	50
11	HE4WPR/11	50
12	HE4WPR/12	50

No. of Poles	Cat. No.	Std. Pk.
2	HE4WPR/02	100
3	HE4WPR/03	100
4	HE4WPR/04	100
5	HE4WPR/05	100
6	HE4WPR/06	50
7	HE4WPR/07	50
8	HE4WPR/08	50
9	HE4WPR/09	50
10	HE4WPR/10	50
11	HE4WPR/11	50
12	HE4WPR/12	50



Dimensions mm

A = 8.0	H = Ø2.8
B = M2.6	I = 2.8
C = 5.2	J = 6.5
D = 2.8	K = 6.5
E = Ø3	L = 94 (12 pole)
F = Ø5	M = 12.2
G = 8.0	N = 16.2



Dimensions mm

A = 10.0	H = Ø3.6
B = M3	I = 3.2
C = 6.4	J = 8.5
D = 3.5	K = 7.9
E = Ø3.6	L = 117 (12 pole)
F = Ø5.7	M = 14.9
G = 10.0	N = 20.0

HE6

HE10

HE16



Flat base with wire protector



Flat base with wire protector



Flat base with wire protector

12 mm	
4.2 mm	
7 mm	
4-6 mm ²	20-10 AWG
400V	300 V
16 A	40 A
0.8 Nm	7.0 lb-in


15 mm	
4.3 / 5.7 mm	
8.5 mm	
6-10 mm ²	18-8 AWG
400V	300 V
25 A	50 A
1.2 Nm	10.6 lb-in

15 mm	
4.3 / 5.7 mm	
8.5 mm	
10-16 mm ²	18-6 AWG
400 V	300 V
35-63 A	63 A
2.0 Nm	17.7 lb-in

Cat. No.	Std. Pk.
HE6WPR/02	100
HE6WPR/03	100
HE6WPR/04	100
HE6WPR/05	100
HE6WPR/06	50
HE6WPR/07	50
HE6WPR/08	50
HE6WPR/09	50
HE6WPR/10	25
HE6WPR/11	25
HE6WPR/12	25


Cat. No.	Std. Pk.
HE10WPR/02	50
HE10WPR/03	50
HE10WPR/04	50
HE10WPR/05	50
HE10WPR/06	25
HE10WPR/07	25
HE10WPR/08	25
HE10WPR/09	25
HE10WPR/10	10
HE10WPR/11	10
HE10WPR/12	10

Cat. No.	Std. Pk.
HE16WPR/02	50
HE16WPR/03	50
HE16WPR/04	50
HE16WPR/05	50
HE16WPR/06	25
HE16WPR/07	25
HE16WPR/08	25
HE16WPR/09	25
HE16WPR/10	10
HE16WPR/11	10
HE16WPR/12	10

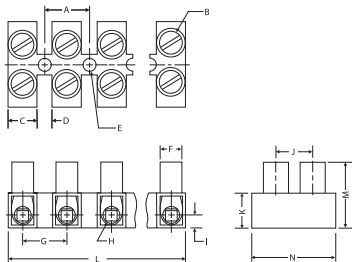


Dimensions mm

A = 12.0	H = Ø4.1
B = M3.5	I = 4.0
C = 7.7	J = 9.5
D = 4.3	K = 8.9
E = Ø4.2	L = 140 (12 pole)
F = Ø6.3	M = 16.8
G = 12.0	N = 22.6

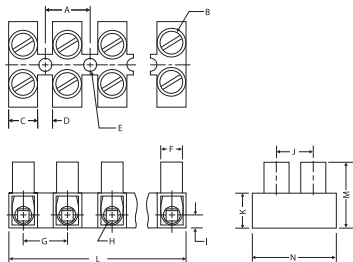

Dimensions mm

A = 15.0	H = Ø5.0
B = M4	I = 4.8
C = 9.3	J = 11.3
D = 5.7	K = 11.6
E = Ø4.3/5.7	L = 175 (12 pole)
F = Ø8.2	M = 21.9
G = 15.0	N = 25.1

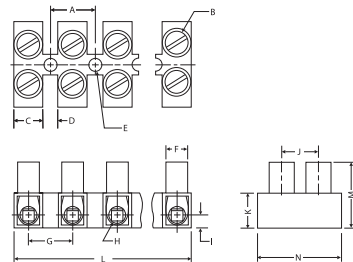

Dimensions mm

A = 15.0	H = Ø5.6
B = M5	I = 4.8
C = 9.3	J = 11.3
D = 5.7	K = 11.6
E = Ø4.3/5.7	L = 175 (12 pole)
F = Ø8.2	M = 21.9
G = 15.0	N = 25.1