




Heyco® Wire Protector Terminal Blocks

Screw to Screw—With Wire Protector Flap

BODY STYLE	WIRE SIZE AWG	mm ²	AMPS North America	POLES	PART NO.		DESCRIPTION	Screws (Metric)	PART DIMENSIONS											
					Natural	FR Brown			A		B	C		D		E		F		
									(12) Poles	in.		mm.	in.	mm.	in.	mm.	in.		mm.	in.
Low Profile*	12-22	2.5	20	2	9389	9419	TB 0B-WP-2P	M 2,6	3.69	93.6	.64	16.2	.61	15.4	.11	2.8	.32	8.0	.11	2.8
				3	9390	N/A	TB 0B-WP-3P													
				12	9393	N/A	TB 0B-WP-12P													
				2	9394	N/A	TB 1B-WP-2P													
	10-20	4	30	3	9395	N/A	TB 1B-WP-3P	M 3,0	4.58	116.4	.73	18.6	.67	17.0	.14	3.6	.39	10.0	.14	3.6
				4	N/A	9426	TB 1B-WP-4P													
				12	9398	9428	TB 1B-WP-12P													
				2	9399	9429	TB 2B-WP-2P													
Raised Base	8-14	6	50	3	9400	N/A	TB 2B-WP-3P	M 3,5	5.26	133.5	.87	22.2	.82	20.8	.17	4.2	.45	11.5	.15	3.7
				12	9403	9433	TB 2B-WP-12P													
				2	9404	N/A	TB 3B-WP-2P													
				3	9405	9435	TB 3B-WP-3P													
	6-10	16	55	12	9408	9438	TB 3B-WP-12P	M 4,0	6.89	175.0	.99	25.2	1.04	26.3	.23	5.8	.59	15.0	.20	5.1

Standard color natural. Flame retardant brown available at extra charge.

*Body Style indicates our standard offering/stocked product and the alternate body style is available for all configurations—consult Heyco.

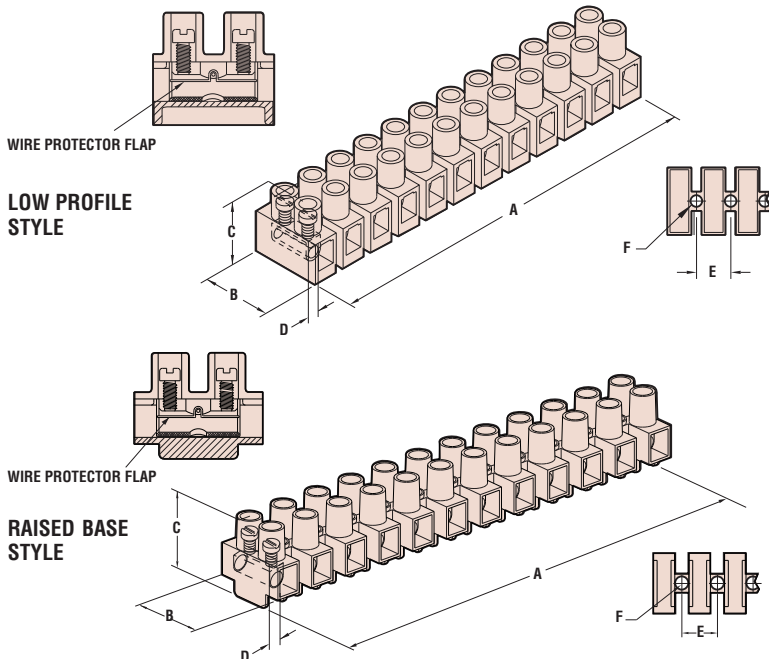

Material 6/6 Nylon and brass
Flamability Rating 94V-2
Certifications

Recognized under the Component Program of Underwriters' Laboratories File E197025
 Certified by the Canadian Standards Association File LR210961
 Approved

- Wire protector flap allows the use of STRANDED or SOLID wire with no crimp terminals and no soldering required.
- Allows standardization of the SOLID WIRE Cordset. Input and output wires are always secured with a screw.
- Modern low profile design occupies less "real estate" inside the appliance.
- No exposed metal parts. "Dead front" designed safety.
- Pressure clamp connectors are supplied in the open position, ready to accept single or multiple solid conductors.
- All sizes are rated at 300 volts (450 volts in Europe).
- Metal parts feature galvanized steel screws and Ni or tin plated brass inserts.
- Available in 94V-0 flame retardant (FR), glass-filled 6/6 Nylon material.
- Material Temperature Index: 284°F (140°C), except TB 3P—338°F (170°C).
- Part No. 9299 fixing pin can be used to mount all terminal blocks, with panel thickness limitations—consult Heyco.

Quick Specs