
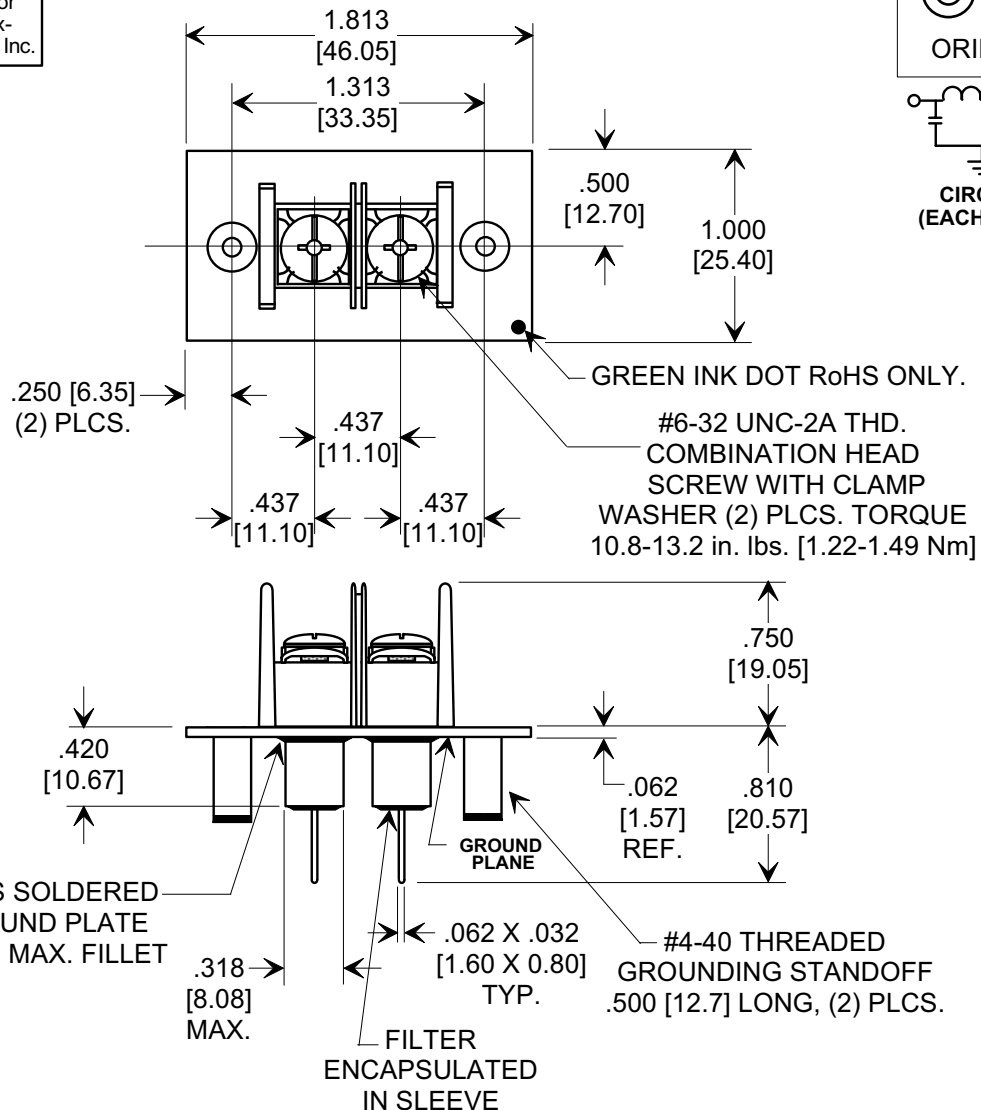
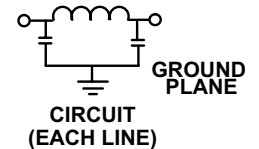


# MARKETING SALES DRAWING

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

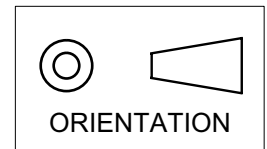

**NOTES:**

- TUSONIX STANDARD PART NUMBER: 7602-551.  
TUSONIX RoHS COMPLIANT PART NUMBER: 7602-551 LF.  
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- LEAD FINISH: MATTE TIM.
- PLATE MATERIAL: COPPER ALLOY, MATTE TIN FINISH.
- PART MARKING: PART NUMBER, DATE CODE AND UL RECOGNITION: WHITE INK.  
RoHS PART: GREEN INK DOT ON TOP OF GROUND PLATE AS SHOWN.
- MAX. SOLDERING TEMPERATURE 500°F [260°C].
- GROUNDING STANDOFF MOUNTING TORQUE 3.0 - 3.8 in. lbs. [0.34 - 0.43 Nm].
- MOLDED MATERIAL: HIGH TEMPERATURE THERMOPLASTIC (PBT), UL RATED 94 V-O.
- UL RECOGNITION PENDING.

Cx (pF)	VVDC -55°C TO +105°C	IDC	I.R. MIN. @ 100 (VDC)	DWV (VDC 1 MIN.)	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220			
					10 MHz	100 MHz	1 GHz	10 GHz
2500/5000	100	20 Amps	10 G Ω	2121	5	50	60	65

X-2015 Rev-0	REVISION RECORD		TOLERANCES unless otherwise specified	Title <b>REAR-PANEL MOUNT FILTERED TERMINAL BLOCK, 2 POSITION UL RECOGNIZED</b>
	Original Release	0		
	WAS SK 8192-001. S.M. 06-01-05	20050524-2-10	3 PLC. DECIMAL ± .030 [0.76]	Drawn S.M. 02-17-05
	ADDED AND REVISED NOTES: ADDED GREEN DOT. S.M. 06-21-06	20060202-10-10	1	ANGLES ± N/A
			<b>TUSONIX</b> TUCSON, ARIZONA	Approved R.C. 02-17-05
			<b>A</b>	<b>7602-551</b>

X-2015 Rev-0